

Diode module - QUINT-DIODE/12-24DC/2X20/1X40 - 2320157

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



DIN rail diode module 12-24 V DC/2x20 A or 1x40 A. Uniform redundancy up to the consumer.

Product Features

- Flexible
- Rugged design
- Consistent redundancy up to the load



Key commercial data

package_quantity	1
GTIN	4046356524766

Technical data

Dimensions

Width	50 mm
Height	130 mm
Depth	125 mm

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 70 °C (> 60 °C derating)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Max. permissible relative humidity (operation)	≤ 95 % (at 25 °C, no condensation)

Input data

Nominal input voltage range	12 V DC ... 24 V DC
Nominal input voltage range	10 V DC ... 30 V DC
Input voltage range DC	[NO ASSET AVAILABLE: TXB,6776472,P]
Nominal input current I _N	2x 20 A (-25 °C ... 60 °C)
Nominal input current I _N	1x 40 A (-25 °C ... 60 °C)
Maximum current I _{max}	2x 30 A (-25°C ... 40°C)
Maximum current I _{max}	1x 60 A (-25°C ... 40°C)
Nominal input current I _N	2x 20 A (-25 °C ... 60 °C)

Diode module - QUINT-DIODE/12-24DC/2X20/1X40 - 2320157

Technical data

Input data

Nominal input current I_N	1x 40 A (-25 °C ... 60 °C)
Maximum current I_{max}	2x 30 A (-25°C ... 40°C)
Maximum current I_{max}	1x 60 A (-25°C ... 40°C)

Output data

Output current	40 A (Increasing power)
Output current	20 A (Redundancy)
Derating	60 °C ... 70 °C (2.5%/K)
Power loss nominal load max.	10 W ($I_{OUT} = 20$ A)

General

Net weight	0.75 kg
Efficiency	> 97 %
Efficiency	> 97 %
Protection class	III
Mounting position	horizontal DIN rail NS 35, EN 60715
Assembly instructions	Alignable: 5 mm horizontally, 15 mm next to active components, 50 mm vertically
Electromagnetic compatibility	Conformance with EMC Directive 2004/108/EC
Low Voltage Directive	Conformance with Low Voltage Directive 2006/95/EC
ATEX	# II 3G Ex nA IIC T4 Gc
ATEX	KEMA 10 ATEX 0165X
IECEX	Ex nA IIC T4 Gc
IECEX	IECEX KEM 10.0091
Standard - Electrical safety	EN 60950-1/VDE 0805 (SELV)
Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations	EN 50178/VDE 0160 (PELV)
Standard – Safety extra-low voltage	IEC 60950-1 (SELV) and EN 60204 (PELV)
Standard - Safe isolation	DIN VDE 0100-410
Standard - Safe isolation	DIN VDE 0106-1010
Standard – Protection against electric shock	DIN 57100-410
Standard – Protection against shock currents, basic requirements for protective separation in electrical equipment	DIN VDE 0106-101
UL approvals	UL/C-UL listed UL 508
UL approvals	UL/C-UL Recognized UL 60950
UL approvals	UL ANSI/ISA-12.12.01 Class I, Division 2, Groups A, B, C, D (Hazardous Location)

Connection data, input

Connection method	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	6 mm ²
Conductor cross section stranded min.	0.2 mm ²

Diode module - QUINT-DIODE/12-24DC/2X20/1X40 - 2320157

Technical data

Connection data, input

Conductor cross section stranded max.	4 mm ²
Conductor cross section AWG/kcmil min.	12
Conductor cross section AWG/kcmil max	10
Stripping length	7 mm
Screw thread	M3

Connection data, output

Connection method	Screw connection
Conductor cross section solid min.	0.5 mm ²
Conductor cross section solid max.	16 mm ²
Conductor cross section stranded min.	0.5 mm ²
Conductor cross section stranded max.	16 mm ²
Conductor cross section AWG/kcmil min.	10
Conductor cross section AWG/kcmil max	6
Stripping length	10 mm

classifications

eCl@ss

eCl@ss 4.0	27250311
eCl@ss 4.1	27250311
eCl@ss 5.0	27242213
eCl@ss 5.1	27242213
eCl@ss 6.0	27049005
eCl@ss 7.0	27049005
eCl@ss 8.0	27049005

ETIM

ETIM 4.0	EC000599
ETIM 5.0	EC002540

UNSPSC

UNSPSC 6.01	30211502
UNSPSC 7.0901	39121004
UNSPSC 11	39121004
UNSPSC 12.01	39121004
UNSPSC 13.2	39121004

approvals

IECEX / ATEX / UL Listed / cUL Listed / cULus Listed / UL Recognized / UL Listed / cUL Recognized / cUL Listed / RINA / GL / BV / cULus Recognized / cULus Listed /

Diode module - QUINT-DIODE/12-24DC/2X20/1X40 - 2320157

approvals

Approval details

IECEEx
ATEX
UL Listed
cUL Listed
cULus Listed
UL Recognized
cUL Recognized
RINA
GL
BV

Diode module - QUINT-DIODE/12-24DC/2X20/1X40 - 2320157

approvals

cULus Recognized  US



accessories

Assembly adapter

UWA 182/52 - 2938235

QUINT-PS-ADAPTERS7/1 - 2938196




UTA 107/30 - 2320089



Drawings

Diode module - QUINT-DIODE/12-24DC/2X20/1X40 - 2320157

Block diagram

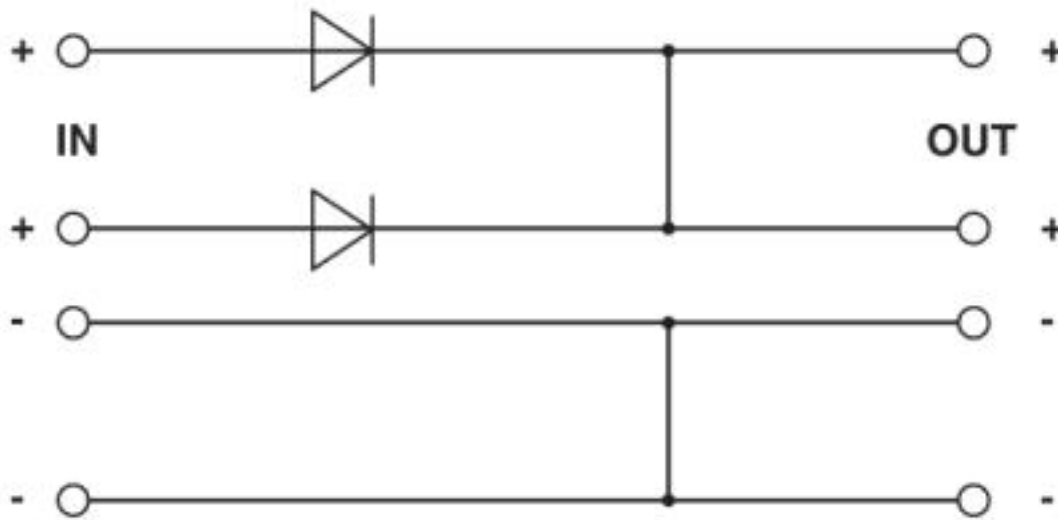

Block diagram

