



## **4-CONDUCTOR TERMINAL STRIP LATERAL MARKING WITH SNAP-IN MOUNTING FOOT** 260-252 TO 260-262




© 1992 - 2011 CADENAS GmbH







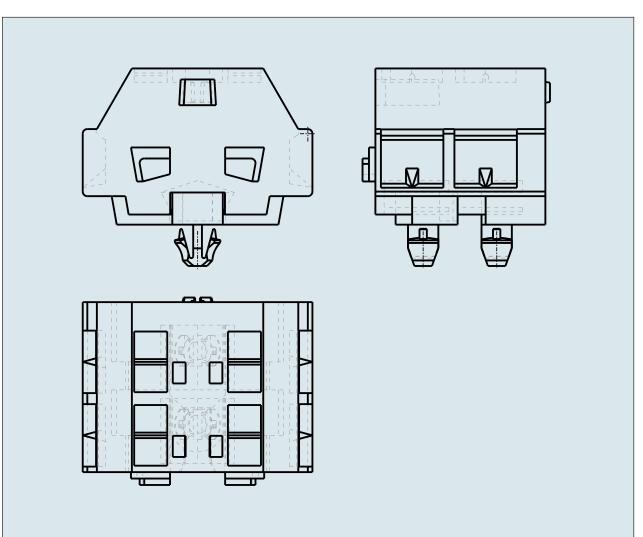



## **4-CONDUCTOR TERMINAL STRIP** LATERAL MARKING WITH SNAP-IN **MOUNTING FOOT**

260-252 TO 260-262

© 1992 - 2011 CADENAS GmbH

ITEM-NO. (ITEM-NO.)	260-254
Cross section1 (Cross section / mm <sup>2</sup> )	0.08 - 1.5
Cross section2 (Cross section / AWG)	28 - 16
Strip length (Strip length / mm)	8 - 9
Measured voltage (Measured voltage / V)	400
Measured shock voltage (Measured shock voltage / kV)	6
Pollution degree (Pollution degree)	3
Current intensity (Current intensity / A)	18
P (NO. OF POLES)	4
Height (Height / mm)	17
Width (Width / mm)	36.4
Depth (Depth / mm)	25
No. of connection Points (No. of connection Points)	16
No. of potentials (No. of potentials)	4
COLOR (COLOR)	grau
WEIGHT (WEIGHT / g)	11.27
Comment (Comment)	L = (No. of poles x pole width) + 4,4 mm