


## FEMALE PLUG PIN SPACING 3.81 MM / 0.15 IN 100% PROTECTED AGAINST MISMATING


© 1992 - 2011 CADENAS GmbH


**PDF DATASHEET** 

734-202 TO 734-220



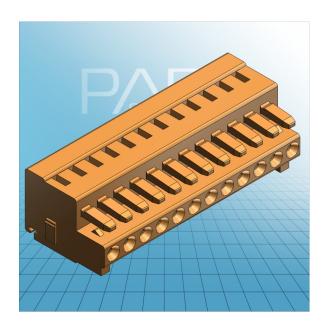

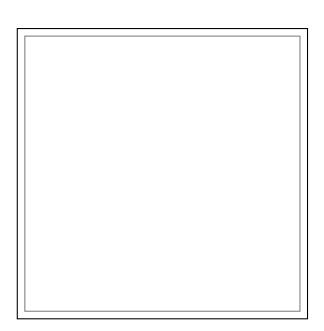

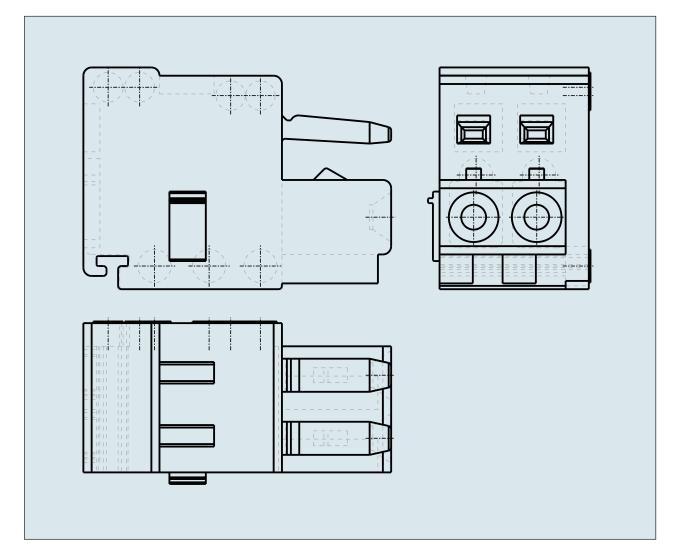



## FEMALE PLUG PIN SPACING 3.81 MM / 0.15 IN 100% PROTECTED AGAINST MISMATING

PDF DATASHEET

© 1992 - 2011 CADENAS GmbH

734-202	10	734-220

ITEM-NO. (ITEM-NO.)	734-212
•	
Cross section1 (Cross section / mm²)	0.08 - 1.5
Cross section2 (Cross section / AWG)	28 - 14
Strip length (Strip length / mm)	7
Measured voltage (Measured voltage / V)	160
Measured shock voltage (Measured shock voltage / kV)	2.5
Pollution degree (Pollution degree)	2
Current intensity (Current intensity / A)	10
RM (PIN SPACING / mm)	3.81
P (NO. OF POLES)	12
Height (Height / mm)	13.4
Width (Width / mm)	47.92
Depth (Depth / mm)	18.6
No. of connection Points (No. of connection Points)	12
No. of potentials (No. of potentials)	12
COLOR (COLOR)	orange
WEIGHT (WEIGHT / g)	9.9
Comment (Comment)	L = (No. of poles x Pin Spacing) + 2,2 mm