


FEMALE PLUG PIN SPACING 3.81 MM / 0.15 IN 100% PROTECTED AGAINST MISMATING


© 1992 - 2011 CADENAS GmbH


PDF DATASHEET

734-202 TO 734-220



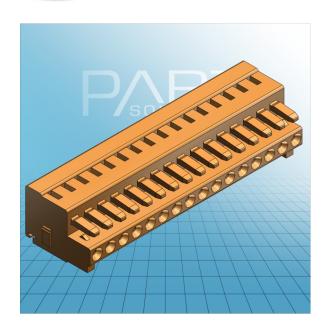

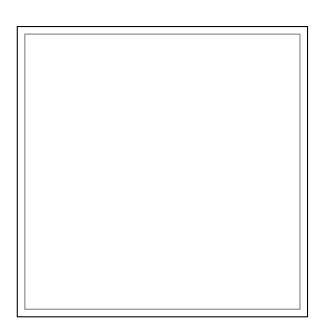

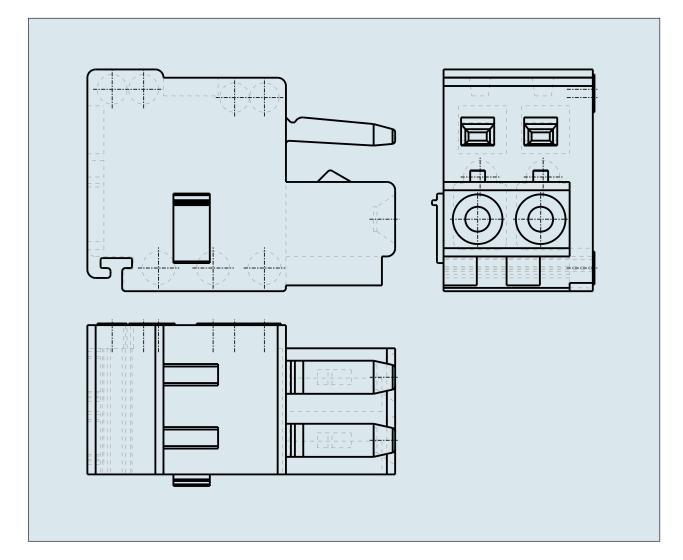



FEMALE PLUG PIN SPACING 3.81 MM / 0.15 IN 100% PROTECTED AGAINST MISMATING

PDF DATASHEET

© 1992 - 2011 CADENAS GmbH

734-202 TO 734-220

| ITEM-NO. (ITEM-NO.) | 734-216 |
|--|---|
| Cross section1 (Cross section / mm²) | 0.08 - 1.5 |
| Cross section2 (Cross section / AWG) | 28 - 14 |
| Strip length (Strip length / mm) | 7 |
| Measured voltage (Measured voltage / V) | 160 |
| Measured shock voltage (Measured shock voltage / kV) | 2.5 |
| Pollution degree (Pollution degree) | 2 |
| Current intensity (Current intensity / A) | 10 |
| RM (PIN SPACING / mm) | 3.81 |
| P (NO. OF POLES) | 16 |
| Height (Height / mm) | 13.4 |
| Width (Width / mm) | 63.16 |
| Depth (Depth / mm) | 18.6 |
| No. of connection Points (No. of connection Points) | 16 |
| No. of potentials (No. of potentials) | 16 |
| COLOR (COLOR) | orange |
| WEIGHT (WEIGHT / g) | 13.112 |
| Comment (Comment) | L = (No. of poles x Pin Spacing) + 2,2 mm |