


## FEMALE PLUG PIN SPACING 3.81 MM / 0.15 IN 100% PROTECTED AGAINST MISMATING


© 1992 - 2011 CADENAS GmbH


**PDF DATASHEET** 

734-202 TO 734-220



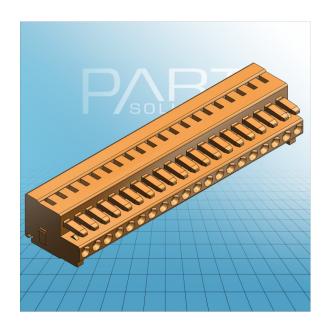

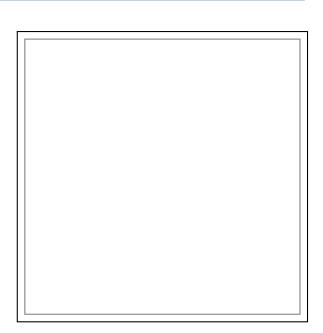

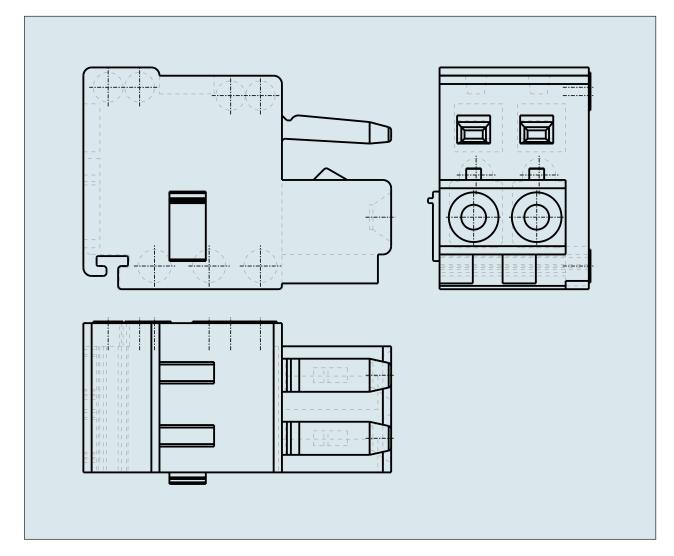



## FEMALE PLUG PIN SPACING 3.81 MM / 0.15 IN 100% PROTECTED AGAINST MISMATING

PDF DATASHEET

© 1992 - 2011 CADENAS GmbH

734-202 TO 734-220

| ITEM-NO. (ITEM-NO.)                                  | 734-220                                   |
|--|---|
| Cross section1 (Cross section / mm²)                 | 0.08 - 1.5                                |
| Cross section2 (Cross section / AWG)                 | 28 - 14                                   |
| Strip length (Strip length / mm)                     | 7   |
| Measured voltage (Measured voltage / V)              | 160                                       |
| Measured shock voltage (Measured shock voltage / kV) | 2.5                                       |
| Pollution degree (Pollution degree)                  | 2   |
| Current intensity (Current intensity / A)            | 10  |
| RM (PIN SPACING / mm)                                | 3.81                                      |
| P (NO. OF POLES)                                     | 20  |
| Height (Height / mm)                                 | 13.4                                      |
| Width (Width / mm)                                   | 78.4                                      |
| Depth (Depth / mm)                                   | 18.6                                      |
| No. of connection Points (No. of connection Points)  | 20  |
| No. of potentials (No. of potentials)                | 20  |
| COLOR (COLOR)  | orange                                    |
| WEIGHT (WEIGHT / g)                                  | 16.336                                    |
| Comment (Comment)                                    | L = (No. of poles x Pin Spacing) + 2,2 mm |