

Feed-through terminal block - ST 2,5-QUATTRO/2P BU - 3040669

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Feed-through terminal block, Connection method: Spring-cage/plug-in connection, Cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, Width: 5.2 mm, Color: blue, Mounting type: NS 35/7,5, NS 35/15

The illustration shows version ST 2,5-QUATTRO/ 2P in gray

Product Features

- ✓ Tested for railway applications
- ✓ The plug-in ST-COMBI spring-cage terminal block series combines the system advantages of the ST standard terminal block series with those of the COMBI plug-in system

Key commercial data

package_quantity	50
GTIN	4017918832520

Technical data

General

Number of levels	1
Number of connections	4
Color	blue
Insulating material	PA
Inflammability class according to UL 94	V0
Area of application	Railway industry
Area of application	Mechanical engineering
Area of application	Plant engineering

General

Maximum load current	24 A (with 4 mm ² conductor cross section)
Rated surge voltage	6 kV
Pollution degree	3
Surge voltage category	III
Insulating material group	I
Connection in acc. with standard	IEC 61984
Nominal current I _N	24 A
Nominal voltage U _N	500 V
Open side panel	ja

Feed-through terminal block - ST 2,5-QUATTRO/2P BU - 3040669

Technical data

Dimensions

Width	5.2 mm
Length	81 mm
Height NS 35/7,5	36.5 mm
Height NS 35/15	44 mm

Connection data

Conductor cross section solid min.	0.08 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section AWG/kcmil min.	28
Conductor cross section AWG/kcmil max	12
Conductor cross section stranded min.	0.08 mm ²
Conductor cross section stranded max.	2.5 mm ²
Min. AWG conductor cross section, stranded	28
Max. AWG conductor cross section, stranded	14
Conductor cross section stranded, with ferrule without plastic sleeve min.	0.14 mm ²
Conductor cross section stranded, with ferrule without plastic sleeve max.	2.5 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve min.	0.14 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve max.	2.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	0.5 mm ²
Connection method	Spring-cage/plug-in connection
Minimum stripping length	8 mm
Maximum stripping length	10 mm
Internal cylindrical gage	A3

classifications

eCl@ss

eCl@ss 4.0	27141117
eCl@ss 4.1	27141117
eCl@ss 5.0	27141120
eCl@ss 5.1	27141120
eCl@ss 6.0	27141120
eCl@ss 7.0	27141120
eCl@ss 8.0	27141120

ETIM

ETIM 2.0	EC000897
ETIM 3.0	EC000897
ETIM 4.0	EC000897

Feed-through terminal block - ST 2,5-QUATTRO/2P BU - 3040669

classifications

ETIM

ETIM 5.0	EC000897
-----------------	----------

UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39121410

approvals

CSA / UL Recognized / VDE Gutachten mit Fertigungsüberwachung / cUL Recognized / GOST / LR / GL / BV / DNV / IECCE CB Scheme / GOST / CSA / cULus Recognized /

Approval details

CSA 		
Usegroups	B	C
Nominal voltage UN	300 V	300 V
Nominal current IN	20 A	20 A
mm²/AWG/kcmil	24-12	24-12

UL Recognized 			
Usegroups	B	C	D
Nominal voltage UN	300 V	300 V	600 V
Nominal current IN	20 A	20 A	5 A
mm²/AWG/kcmil	28-12	28-12	28-12

VDE Gutachten mit Fertigungsüberwachung 	
Nominal voltage UN	500 V
Nominal current IN	
mm²/AWG/kcmil	0.2-4

cUL Recognized 	
---	--

Feed-through terminal block - ST 2,5-QUATTRO/2P BU - 3040669

approvals

Usegroups	B	C	D
Nominal voltage UN	300 V	300 V	600 V
Nominal current IN	20 A	20 A	5 A
mm²/AWG/kcmil	28-12	28-12	28-12

GOST 

LR

GL

BV

DNV

IECEE CB Scheme 

Nominal voltage UN	500 V
Nominal current IN	
mm²/AWG/kcmil	0.2-4



Usegroups	B	C
Nominal voltage UN	300 V	300 V
Nominal current IN	20 A	20 A
mm²/AWG/kcmil	24-12	24-12

cULus Recognized 

Feed-through terminal block - ST 2,5-QUATTRO/2P BU - 3040669

accessories

End cover

D-ST 2,5-QUATTRO/ 2P - 3040083



DS-ST 4/P - 3043750



DP PS-5 - 3036725



Partition plate

ATP-ST QUATTRO - 3030815



Coding element

PC - 3040588



Feed-through terminal block - ST 2,5-QUATTRO/2P BU - 3040669

accessories

Screwdriver tools

SZF 1-0,6X3,5 - 1204517



Labeled terminal marker

WST 2,5 - 3030941



ZB 5 CUS - 0824962



UC-TM 5 CUS - 0824581



UCT-TM 5 CUS - 0829595



Feed-through terminal block - ST 2,5-QUATTRO/2P BU - 3040669

accessories

ZBF 5 CUS - 0825025



UC-TMF 5 CUS - 0824638



UCT-TMF 5 CUS - 0829658



Documentation

ST-IL - 3039900



Bridge

FBS 2-5 - 3030161



Feed-through terminal block - ST 2,5-QUATTRO/2P BU - 3040669

accessories

FBS 3-5 - 3030174



FBS 4-5 - 3030187



FBS 5-5 - 3030190



FBS 10-5 - 3030213



FBS 20-5 - 3030226



FBS 50-5 - 3038930



Feed-through terminal block - ST 2,5-QUATTRO/2P BU - 3040669 accessories

FBS 2-5 BU - 3036877



FBS 3-5 BU - 3036880



FBS 4-5 BU - 3036893



FBS 5-5 BU - 3036903



FBS 10-5 BU - 3036916



Feed-through terminal block - ST 2,5-QUATTRO/2P BU - 3040669

accessories

FBS 20-5 BU - 3036929



FBS 50-5 BU - 3032114



FBS 2-5 GY - 3038969



FBS 3-5 GY - 3038972



FBS 4-5 GY - 3038985



FBS 5-5 GY - 3038998



Feed-through terminal block - ST 2,5-QUATTRO/2P BU - 3040669

accessories

FBS 10-5 GY - 3039007



FBS 20-5 GY - 3038671



FBS 50-5 GY - 3032127



Mounting rail

NS 35/ 7,5 PERF 2000MM - 0801733



NS 35/ 7,5 UNPERF 2000MM - 0801681



Feed-through terminal block - ST 2,5-QUATTRO/2P BU - 3040669 accessories

NS 35/ 7,5 WH PERF 2000MM - 1204119



NS 35/ 7,5 WH UNPERF 2000MM - 1204122



NS 35/ 7,5 AL UNPERF 2000MM - 0801704



NS 35/ 7,5 ZN PERF 2000MM - 1206421



NS 35/ 7,5 ZN UNPERF 2000MM - 1206434



NS 35/ 7,5 CU UNPERF 2000MM - 0801762



Feed-through terminal block - ST 2,5-QUATTRO/2P BU - 3040669

accessories

NS 35/ 7,5 CAP - 1206560



Terminal marking

ZB 5 :UNBEDRUCKT - 1050004



UC-TM 5 - 0818108



UCT-TM 5 - 0828734



ZBF 5:UNBEDRUCKT - 0808642



Feed-through terminal block - ST 2,5-QUATTRO/2P BU - 3040669 accessories

UC-TMF 5 - 0818153



UCT-TMF 5 - 0828744



Test plug terminal block

MPS-MT - 0201744



PAI-4-FIX-5/6 BU - 3035975



PAI-4-FIX-5/6 OG - 3035974



Feed-through terminal block - ST 2,5-QUATTRO/2P BU - 3040669 accessories

PAI-4-FIX-5/6 YE - 3035977



PAI-4-FIX-5/6 RD - 3035976



PAI-4-FIX-5/6 GN - 3035978



PAI-4-FIX-5/6 BK - 3035980



PAI-4-FIX-5/6 GY - 3035982



PAI-4-FIX-5/6 VT - 3035979



Feed-through terminal block - ST 2,5-QUATTRO/2P BU - 3040669

accessories

PAI-4-FIX-5/6 BN - 3035981



PS-5 - 3030983



PS-5/2,3MM RD - 3038723



Insulating sleeve

MPS-IH WH - 0201663



MPS-IH RD - 0201676



Feed-through terminal block - ST 2,5-QUATTRO/2P BU - 3040669

accessories

MPS-IH BU - 0201689



MPS-IH YE - 0201692



MPS-IH GN - 0201702



MPS-IH GY - 0201728



MPS-IH BK - 0201731



ISH 2,5/0,2 - 3002843



Feed-through terminal block - ST 2,5-QUATTRO/2P BU - 3040669

accessories

ISH 2,5/0,5 - 3002856




ISH 2,5/1,0 - 3002869



Drawings


Diagram

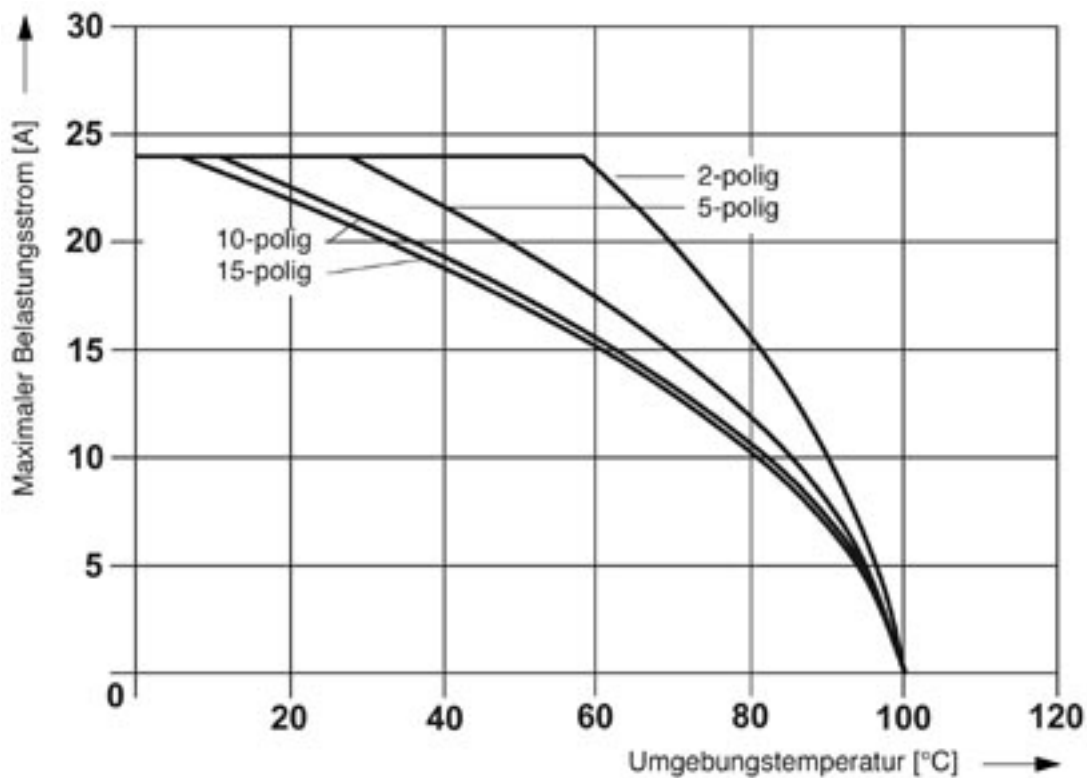

Applies to all male connector variants SP...

Feed-through terminal block - ST 2,5-QUATTRO/2P BU - 3040669

Dimensioned drawing

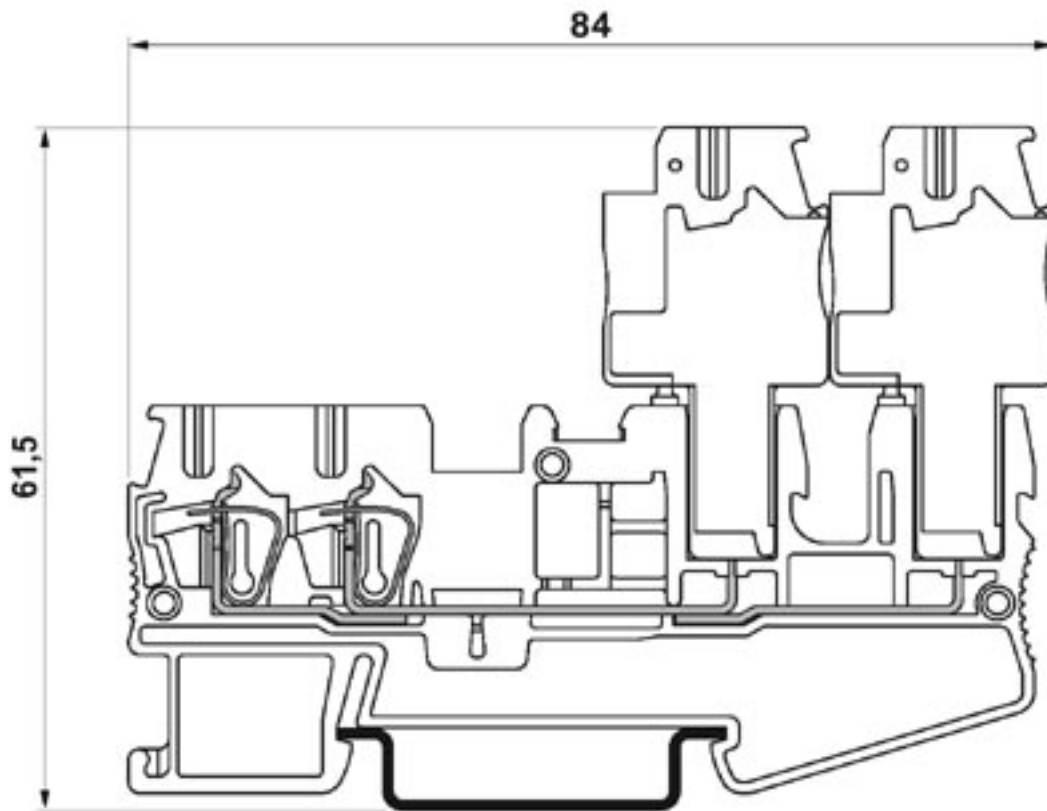

Circuit diagram

