
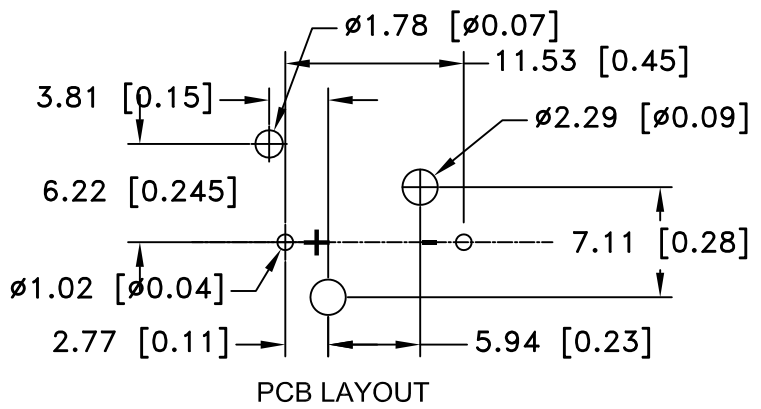



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
02/29/08	A	REDRAWN ADDED "ROHS COMPLIANT"	T.B.	B.S.	
09/10/10	B	ADDED DIM. 6.22 FOR PIN LOCATION	T.B.	B.S.	
06/13/14	C	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

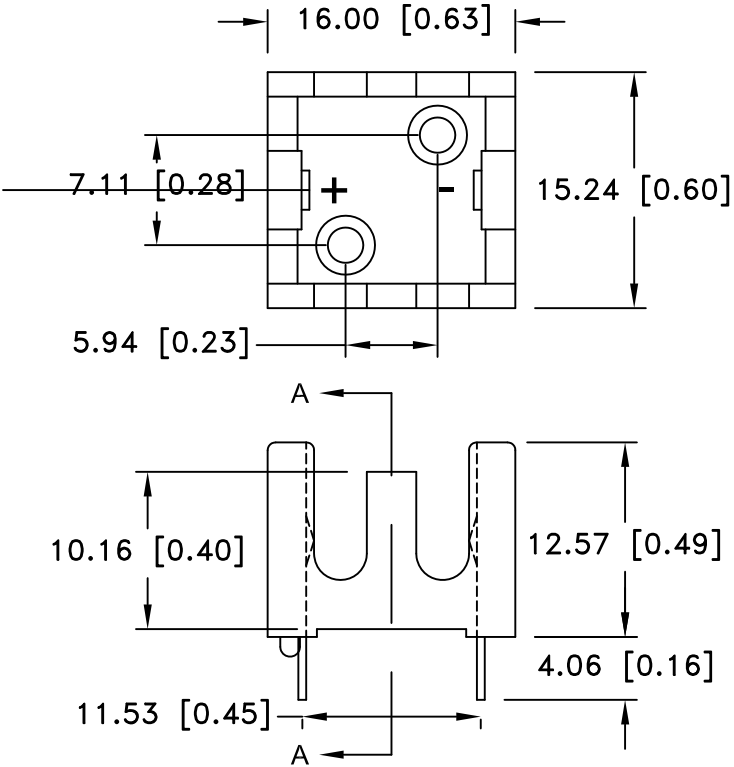

**SPECIFICATIONS:**  
 HOLDER MATERIAL: SELF EXTINGUISHING THERMOPLASTIC,  
 BLACK PBT  
 FLAMMABILITY RATING:UL94V-0, FILE #E41797  
 CONTACTS: 301 SPRING TEMPER STAINLESS STEEL, NICKEL  
 PLATED OVERALL  
 DIELECTRIC STRENGTH: 560 VOLTS/MIL AT 25°C FOR 5 SEC.  
 TEMPERATURE RANGE: -55°C TO +140°C  
 RESISTANCE TO SOLVENTS: XYLENE, ETHYL , BUTYL, METHYL,  
 PROPYL ALCOHOL, ETHYL ACETATE,  
 HEPTANE, TOLUENE, REFRIGERANT

**NOTES:**  
 EYELET STIMPSON STYLE#A1883 0.110" OD x 0.190" FLANGE  
 FLANGE RECESS Ø0.203" x 0.090" DEEP  
 ACCEPTS STANDARD 2-56 MACHINE SCREWS  
 ACCESSORIES: BI-UM-3-4, INSULATOR  
 ROHS 2 COMPLIANT

Tolerance (Except as noted)			
decimal ±.5 (.020)		Scale	Drawn By B.S.
Fractional ± .8 (.030)	Title	BH1/3N-C LITHIUM BATTERY HOLDER	
Angular ± 3°	Date	Drawing Number	
	6/13/14	BH1/3N-C	