




MS-500P-MF TOGGLE SWITCH

RESELL-NO. 700975

Sheet 1 of 1

Specs.	6A, 125V, A.C.
Rating	DMDT (OP) ON-ON
Circuit	2.5V/1A, D.C (20 mΩ) or less, initial characteristics.
Contact Resistance	500V, D.C. Megger. 100 MΩ or more.
Insulating Resistance	1000V, A.C. (Between terminals), 1500V, A.C. (Between Live and metal parts) 50/60Hz for 1 minute.
Withstand Voltage	Rated Load with Resistance..5,000 cycles, No-load..30,000 cycles.
Durability	

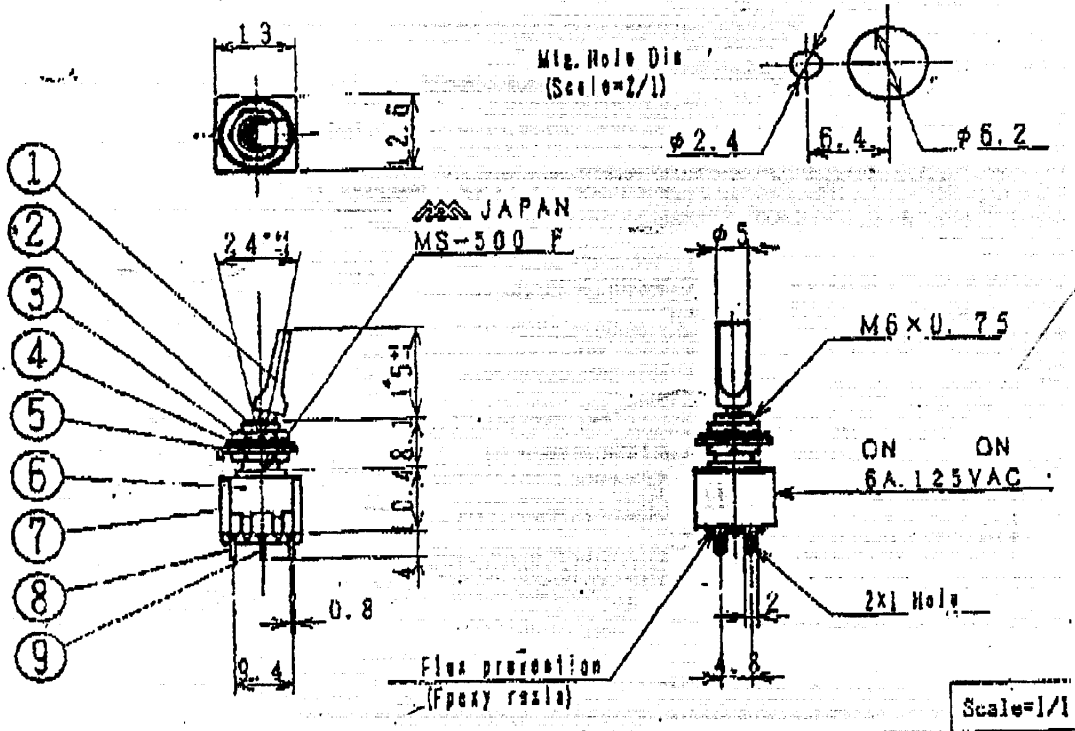

**Materials:**

1. Lever	Molded ABS resin	SILVER (Chrome-Plated)
2. Bushing	Nickel plated brass.	
3. Hex. nut	Nickel plated hard steel.	
4. Toothed Lock Washer	Unchromed steel.	
5. Keying Washer	Unchromed steel.	
6. Cover Plate	Stainless steel.	
7. Body	Molded melamine phenolic, blue.	
8. Terminals	Silver plated silver-clad copper.	
9. Terminals Common	Silver plated copper sheet.	

All dimensions in millimeters. Unless otherwise specified tolerances, ±0.5.

Designed by J. Hirayama	date 91.6.28	Checked by Y. Takahashi	date 91.7.1
Drawn by J. Hirayama	date 91.6.28	Approved by T. Yamamoto	date 91.7.1