




MS-500P-MF TOGGLE SWITCH

RESELL-NO. 700975

Sheet 1 of 1

Specs.	6A, 125V, A.C.
Rating	DMDT (OP) ON-ON
Circuit	2.5V/1A, D.C (20 mΩ) or less, initial characteristics.
Contact Resistance	500V, D.C. Megger. 100 MΩ or more.
Insulating Resistance	1000V, A.C. (Between terminals), 1500V, A.C. (Between Live and metal parts) 50/60Hz for 1 minute.
Withstand Voltage	Rated Load with Resistance..5,000 cycles, No-load..30,000 cycles.
Durability	

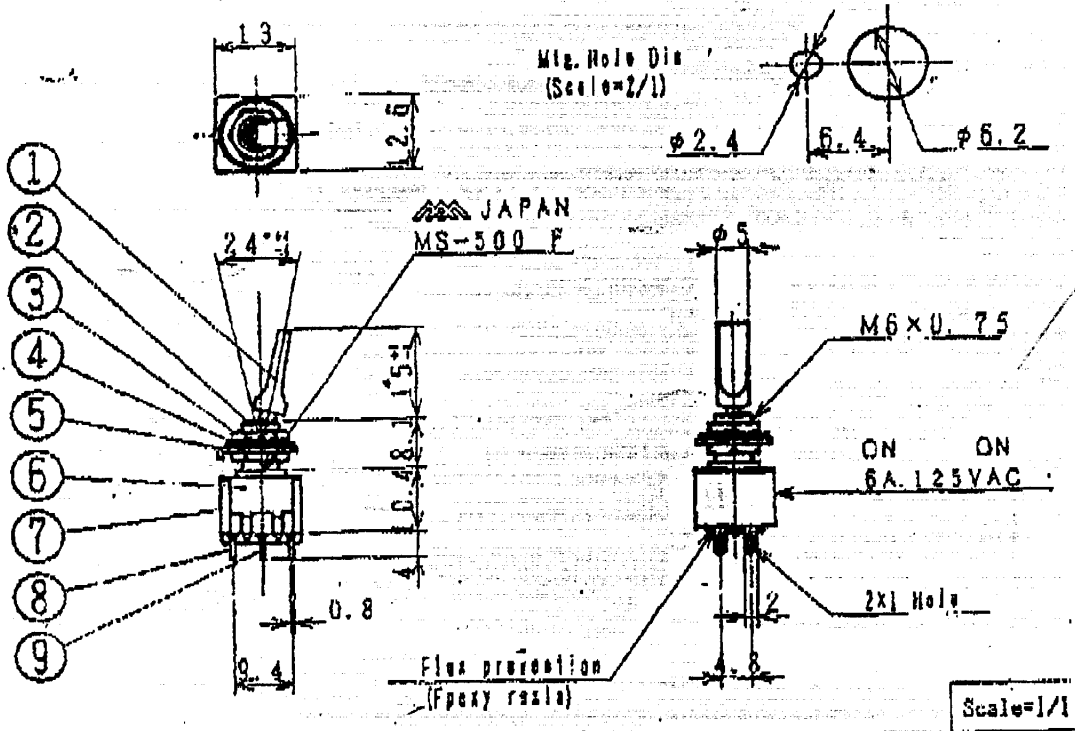

**Materials:**

- 1. Lever..... Molded ABS resin SILVER (Chrome-Plated)
- 2. Bushing..... Nickel plated brass.
- 3. Hex. nut..... Nickel plated hard steel.
- 4. Toothed Lock Washer..... Unchromed steel.
- 5. Keying Washer..... Unchromed steel.
- 6. Cover Plate..... Stainless steel.
- 7. Body..... Molded melamine phenolic, blue.
- 8. Terminals..... Silver plated silver-clad copper.
- 9. Terminals Common..... Silver plated copper sheet.

All dimensions in millimeters. Unless otherwise specified tolerances, ±0.5.

Designed by J. Hirayama	date 91.6.28	Checked by Y. Takahashi	date '91-7-1
Drawn by J. Hirayama	date 91.6.28	Approved by T. Yamamoto	date '91-7-1