

# Solid-state relays - ST-OV2- 24DC/ 24DC/5 - 2905491

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Plug-in power solid-state relay, with LED and protective circuit in input and output circuits, input: 24 V DC, output: 3 - 30 V DC/max. 5 A, can be plugged into basic terminal blocks

The illustration shows version ST-OV 2- 5 DC/ 24 DC/5

## Key commercial data

package_quantity	10
GTIN	4017918079444

## Technical data

Note:

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

## Dimensions

Width	14.6 mm
Height	33 mm
Depth	66.5 mm

## Ambient conditions

Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

## Input data

Nominal input voltage $U_N$	24 V DC $\pm$ 20 %
Switching threshold "0" signal in reference to $U_N$	$\leq$ 0.4
Switching threshold "1" signal in reference to $U_N$	$\geq$ 0.8
Typical input current at $U_N$	7 mA
Typical response time	50 $\mu$ s
Typical turn-off time	200 $\mu$ s
Status display	Yellow LED
Type of protection	Protection against polarity reversal
Type of protection	Surge protection
Protective circuit/component	Polarity protection diode
Transmission frequency	300 Hz

## Output data

# Solid-state relays - ST-OV2- 24DC/ 24DC/5 - 2905491

## Technical data

### Output data

<b>Output voltage range</b>	3 V DC ... 30 V DC
<b>Limiting continuous current</b>	5 A (see derating curve)
<b>Peak offstate voltage</b>	30 V DC (Collector-emitter reverse voltage)
<b>Voltage drop at max. limiting continuous current</b>	0.3 V
<b>Output circuit</b>	2-wire, floating
<b>Type of protection</b>	Protection against polarity reversal
<b>Type of protection</b>	Surge protection
<b>Protective circuit/component</b>	Polarity protection diode

### General

<b>Test voltage input/output</b>	2.5 kV AC
<b>Mounting position</b>	Any
<b>Standards/regulations</b>	IEC 60664
<b>Standards/regulations</b>	IEC 60664 A
<b>Standards/regulations</b>	DIN VDE 0110

## classifications

### eCl@ss

<b>eCl@ss 4.0</b>	27371102
<b>eCl@ss 4.1</b>	27371102
<b>eCl@ss 5.0</b>	27371001
<b>eCl@ss 5.1</b>	27371001
<b>eCl@ss 6.0</b>	27371001
<b>eCl@ss 7.0</b>	27371001
<b>eCl@ss 8.0</b>	27371001

### ETIM

<b>ETIM 2.0</b>	EC001504
<b>ETIM 3.0</b>	EC001504
<b>ETIM 4.0</b>	EC001504
<b>ETIM 5.0</b>	EC001504

### UNSPSC

<b>UNSPSC 6.01</b>	30211916
<b>UNSPSC 7.0901</b>	39121542
<b>UNSPSC 11</b>	39121542
<b>UNSPSC 12.01</b>	39121542
<b>UNSPSC 13.2</b>	39121542

## approvals

GOST / GOST /

# Solid-state relays - ST-OV2- 24DC/ 24DC/5 - 2905491


approvals

Approval details



Drawings


Diagram

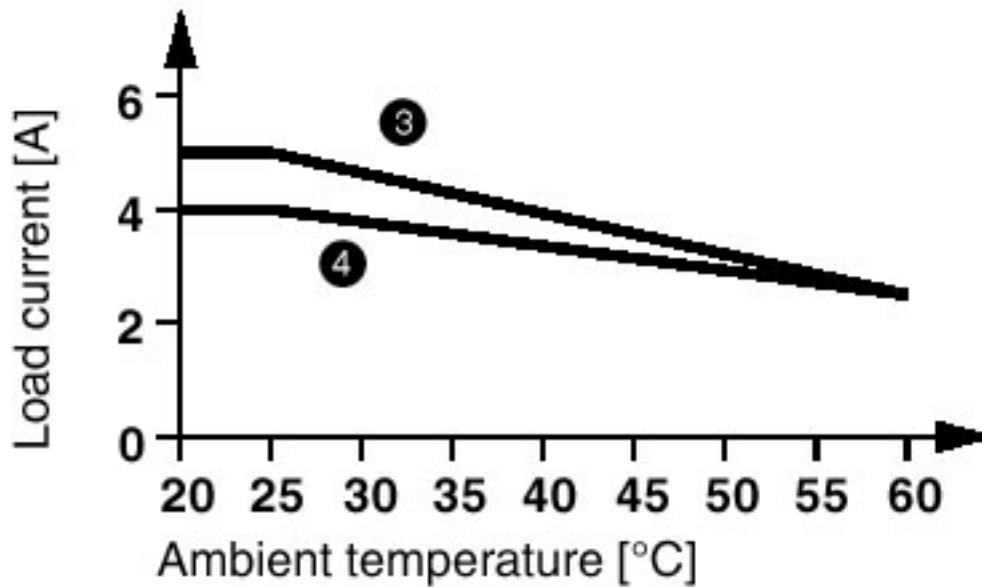

- ③ power optocouplers mounted in rows with zero spacing, horizontally, or with spacing of > 10 mm, vertically.
- ④ power optocouplers mounted in rows with zero spacing, vertically.


## Solid-state relays - ST-OV2- 24DC/ 24DC/5 - 2905491

Circuit diagram

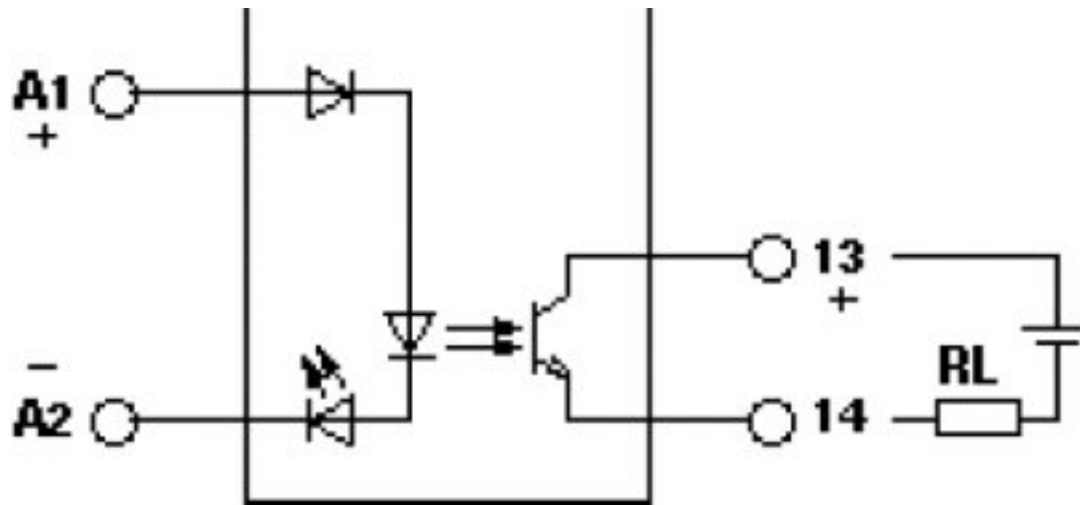

# Solid-state relays - ST-OV2- 24DC/ 24DC/5 - 2905491

Circuit diagram

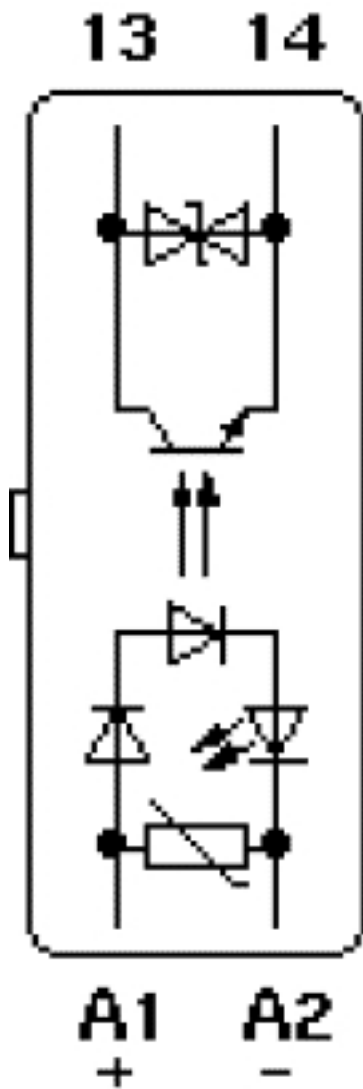

© Phoenix Contact 2013 - all rights reserved  
<http://www.phoenixcontact.com>