0911 Vandal Resistant Switches - Designed to IP66

16(4)A 250Vac T85

16A 125/250Vac 3/4hp T85 50E3 UL file no. E45221

125V 1/2 HP, 250V 3/4 HP, 0.4A 125Vdc, 0.2A 250Vdc

RoHS compliant

Approvals apply to switch mechanism only.
µ contact gap.
Switching mechanisms are snap action (not sealed).
See rating details and technical data on pages 58&59.

- Snap action switches
- Ratings up to 16A, 250Vac
- Stainless steel button and bezel
- Front panel sealed to IP66
- Single pole C/O switch

C0911VA ---

C 0911 V A

TERMINAL FUNCTION ACTUATOR BODY

TERMINAL	FUNCTION	ACTUATOR	BODY
C  6.3 x 0.8	**0911** ON - ON (momentary 1 side)	**V** Flat top (stainless steel) 	**A** Stainless steel Chamfer profile bezel  Ø19.2 Panel cut-out Panel thickness up to 8.0mm
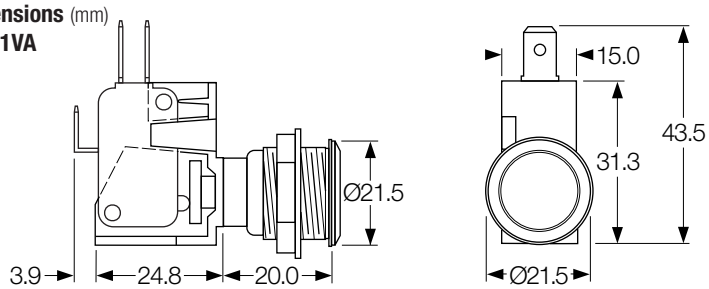
Dimensions (mm)
C0911VA