

# Safety relays - PSR-SCP- 24UC/ESA4/3X1/1X2/B - 2963763

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Safety relay for emergency stop and safety door monitoring up to SIL 3 or Cat. 4, PL e according to EN ISO 13849, single or two-channel operation, 3 enabling current paths, nominal input voltage of 24 V AC/DC, plug-in screw terminal blocks

## Product Features

- Up to Cat. 4/PL e according to ISO 13849-1, SILCL 3 according to IEC 62061, SIL 3 according to IEC 61508
- Single and two-channel control
- 3 enabling current paths, 1 signaling current path
- Manually monitored and automatic activation in a single device



## Key commercial data

package_quantity	1
GTIN	4017918878085

## Technical data

Note:

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

## Dimensions

Width	22.5 mm
Height	99 mm
Depth	114.5 mm

## Ambient conditions

Ambient temperature (operation)	-20 °C ... 55 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Max. permissible relative humidity (operation)	75 %
Max. permissible humidity (storage/transport)	75 %

## Input data

Nominal input voltage $U_N$	24 V AC/DC
Input voltage range in reference to $U_N$	0.85 ... 1.1
Typical input current at $U_N$	140 mA AC
Typical input current at $U_N$	65 mA DC

# Safety relays - PSR-SCP- 24UC/ESA4/3X1/1X2/B - 2963763

## Technical data

### Input data

<b>Voltage at input/start and feedback circuit</b>	approx. 24 V DC
<b>Typical response time</b>	100 ms (automatic start)
<b>Typical release time</b>	45 ms (single-channel)
<b>Typical release time</b>	10 ms (two-channel)
<b>Concurrence input 1/2</b>	Infinite
<b>Recovery time</b>	1 s
<b>Max. permissible overall conductor resistance</b>	approx. 50 Ω (Input and start circuits at U <sub>N</sub> )

### Output data

<b>Contact type</b>	3 enabling current paths
<b>Contact type</b>	1 signaling current path
<b>Contact material</b>	AgSnO <sub>2</sub> , + 0.2 μm Au
<b>Maximum switching voltage</b>	250 V AC/DC
<b>Minimum switching voltage</b>	15 V AC/DC
<b>Limiting continuous current</b>	6 A (N/O contact)
<b>Maximum inrush current</b>	6 A
<b>Inrush current, minimum</b>	25 mA
<b>Sq. Total current</b>	$72 \text{ A}^2 (I_{TH}^2 = I_1^2 + I_2^2 + I_3^2)$
<b>Interrupting rating (ohmic load) max.</b>	144 W (24 V DC, τ = 0 ms)
<b>Interrupting rating (ohmic load) max.</b>	288 W (48 V DC, τ = 0 ms)
<b>Interrupting rating (ohmic load) max.</b>	77 W (110 V DC, τ = 0 ms)
<b>Interrupting rating (ohmic load) max.</b>	88 W (220 V DC, τ = 0 ms)
<b>Interrupting rating (ohmic load) max.</b>	1500 VA (250 V AC, τ = 0 ms)
<b>Maximum interrupting rating (inductive load)</b>	48 W (24 V DC, τ = 40 ms)
<b>Maximum interrupting rating (inductive load)</b>	40 W (48 V DC, τ = 40 ms)
<b>Maximum interrupting rating (inductive load)</b>	35 W (110 V DC, τ = 40 ms)
<b>Maximum interrupting rating (inductive load)</b>	33 W (220 V DC, τ = 40 ms)
<b>Switching capacity min.</b>	0.4 W
<b>Output fuse</b>	10 A gL/gG NEOZED (N/O contact)
<b>Output fuse</b>	6 A gL/gG NEOZED (N/C contact)

### General

<b>Relay type</b>	Electromechanically forcibly guided, dust-proof relay.
<b>Mechanical service life</b>	Approx. 10 <sup>7</sup> cycles
<b>Mounting position</b>	Any
<b>Category according to EN 13849-1</b>	4
<b>Stop category</b>	0
<b>Name</b>	Air and creepage distances between the power circuits
<b>Standards/regulations</b>	DIN EN 50178/VDE 0160
<b>Rated surge voltage / insulation</b>	4 kV / basic insulation (safe isolation, reinforced insulation, and 6 kV between A1-A2/logic/enabling and signaling current paths)
<b>Rated insulation voltage</b>	250 V

# Safety relays - PSR-SCP- 24UC/ESA4/3X1/1X2/B - 2963763

## Technical data

### General

<b>Pollution degree</b>	2
<b>Surge voltage category</b>	III

### Connection data

<b>Conductor cross section solid min.</b>	0.2 mm <sup>2</sup>
<b>Conductor cross section solid max.</b>	2.5 mm <sup>2</sup>
<b>Conductor cross section stranded min.</b>	0.2 mm <sup>2</sup>
<b>Conductor cross section stranded max.</b>	2.5 mm <sup>2</sup>
<b>Conductor cross section AWG/kcmil min.</b>	24
<b>Conductor cross section AWG/kcmil max</b>	12
<b>Stripping length</b>	7 mm
<b>Screw thread</b>	M3
<b>Connection method</b>	Screw connection

## classifications

### eCl@ss

<b>eCl@ss 4.0</b>	27371102
<b>eCl@ss 4.1</b>	27371102
<b>eCl@ss 5.0</b>	27371901
<b>eCl@ss 5.1</b>	27371901
<b>eCl@ss 6.0</b>	27371819
<b>eCl@ss 7.0</b>	27371819
<b>eCl@ss 8.0</b>	27371819

### ETIM

<b>ETIM 2.0</b>	EC000196
<b>ETIM 3.0</b>	EC001449
<b>ETIM 4.0</b>	EC001449
<b>ETIM 5.0</b>	EC001449

### UNSPSC

<b>UNSPSC 6.01</b>	30211901
<b>UNSPSC 7.0901</b>	39121501
<b>UNSPSC 11</b>	39121501
<b>UNSPSC 12.01</b>	39121501
<b>UNSPSC 13.2</b>	39121501

## approvals

---



UL Listed / GOST / cUL Listed / Functional Safety / cULus Listed /

---

### Approval details

# Safety relays - PSR-SCP- 24UC/ESA4/3X1/1X2/B - 2963763

approvals

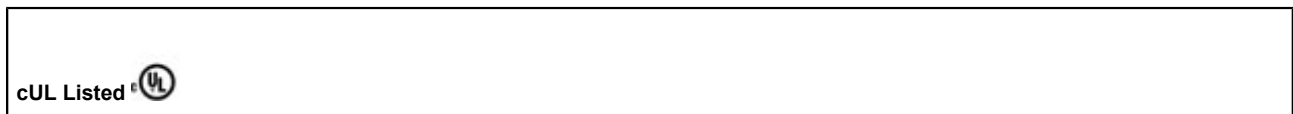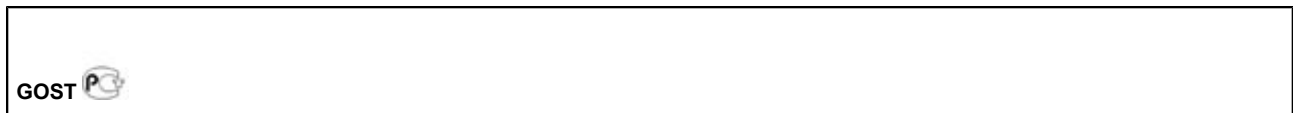


Functional Safety



## Drawings

Circuit diagram

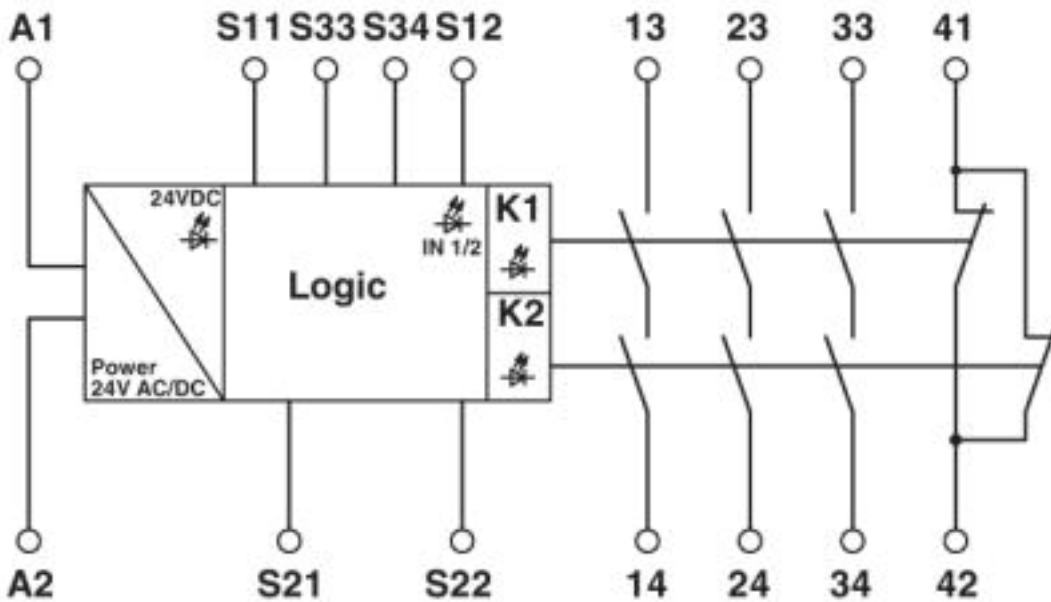

1 = logics