

# Safety relays - PSR-SCP- 24DC/ESP4/2X1/1X2 - 2981020

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Safety relay for SIL 3 high and low-demand applications, also approved according to EN 50156, Germanischer Lloyd, and EN ISO 13849, emergency stop and safety door monitoring, single-channel, 2 enabling current paths, 1 alarm contact, plug-in screw terminal blocks, width: 22.5 mm

## Product Features

- Up to Cat. 4/PL e according to ISO 13849-1, SILCL 3 according to IEC 62061, SIL 3 according to IEC 61508
- Single-channel control
- Safe isolation
- With inrush current reduction, therefore suitable for coupling to failsafe controllers (PSR-ESP4)



## Key commercial data

package_quantity	1
GTIN	4017918911065

## Technical data

Note:

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

## Dimensions

Width	22.5 mm
Height	99 mm
Depth	114.5 mm

## Ambient conditions

Ambient temperature (operation)	-20 °C ... 55 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Max. permissible relative humidity (operation)	75 %
Max. permissible humidity (storage/transport)	75 %

## Input data

Nominal input voltage $U_N$	24 V DC
Input voltage range in reference to $U_N$	0.85 ... 1.1
Typical input current at $U_N$	50 mA DC
Typical inrush current	< 1 A

# Safety relays - PSR-SCP- 24DC/ESP4/2X1/1X2 - 2981020

## Technical data

### Input data

Voltage at input/start and feedback circuit	24 V DC
Typical response time	60 ms (Automatic/manual start)
Typical release time	20 ms
Recovery time	approx. 1 s

### Output data

Contact type	2 enabling current paths
Contact type	1 signaling current path (type B according to EN 50205)
Contact material	AgSnO <sub>2</sub> , gold-flashed
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	10 V
Limiting continuous current	6 A (N/O contact/N/C contact, high demand)
Limiting continuous current	4 A (N/O contact/N/C contact, low demand)
Maximum inrush current	6 A
Inrush current, minimum	10 mA
Sq. Total current	$72 \text{ A}^2 (I_{TH}^2 = I_1^2 + I_2^2)$
Interrupting rating (ohmic load) max.	144 W (24 V DC, $\tau = 0 \text{ ms}$ )
Interrupting rating (ohmic load) max.	200 W (48 V DC, $\tau = 0 \text{ ms}$ )
Interrupting rating (ohmic load) max.	77 W (110 V DC, $\tau = 0 \text{ ms}$ )
Interrupting rating (ohmic load) max.	70 W (220 V DC, $\tau = 0 \text{ ms}$ )
Interrupting rating (ohmic load) max.	1500 VA (250 V AC, $\tau = 0 \text{ ms}$ )
Maximum interrupting rating (inductive load)	42 W (24 V DC, $\tau = 40 \text{ ms}$ )
Maximum interrupting rating (inductive load)	40 W (48 V DC, $\tau = 40 \text{ ms}$ )
Maximum interrupting rating (inductive load)	35 W (110 V DC, $\tau = 40 \text{ ms}$ )
Maximum interrupting rating (inductive load)	33 W (220 V DC, $\tau = 40 \text{ ms}$ )
Switching capacity min.	0.2 W
Output fuse	6 A gL/gG NEOZED (High demand)
Output fuse	4 A gL/gG NEOZED (Low demand)

### General

Relay type	Electromechanically forcibly guided, dust-proof relay.
Mechanical service life	Approx. $10^7$ cycles
Mounting position	On horizontal and vertical DIN rail
Category according to EN 13849-1	4
Stop category	0
Name	Air and creepage distances between the power circuits
Standards/regulations	DIN EN 50178/VDE 0160
Rated surge voltage / insulation	6 kV / Safe isolation, increased insulation
Rated insulation voltage	250 V
Pollution degree	2
Surge voltage category	III
Housing material	Polyamide PA non-reinforced

# Safety relays - PSR-SCP- 24DC/ESP4/2X1/1X2 - 2981020

## Technical data

### Connection data

Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	2.5 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	7 mm
Screw thread	M3
Connection method	Screw connection

## classifications

### eCl@ss

eCl@ss 4.0	27371102
eCl@ss 4.1	27371102
eCl@ss 5.0	27371901
eCl@ss 5.1	27371901
eCl@ss 6.0	27371819
eCl@ss 7.0	27371819
eCl@ss 8.0	27371819

### ETIM

ETIM 2.0	EC001449
ETIM 3.0	EC001449
ETIM 4.0	EC001449
ETIM 5.0	EC001449

### UNSPSC

UNSPSC 6.01	30211901
UNSPSC 7.0901	39121501
UNSPSC 11	39121501
UNSPSC 12.01	39121501
UNSPSC 13.2	39121501


## approvals

---

UL Listed / GOST / cUL Listed / GL / Functional Safety / cULus Listed /

---

### Approval details


---

## Safety relays - PSR-SCP- 24DC/ESP4/2X1/1X2 - 2981020

approvals

GOST 

cUL Listed 

GL


Functional Safety

cULus Listed 

Drawings

# Safety relays - PSR-SCP- 24DC/ESP4/2X1/1X2 - 2981020


Circuit diagram

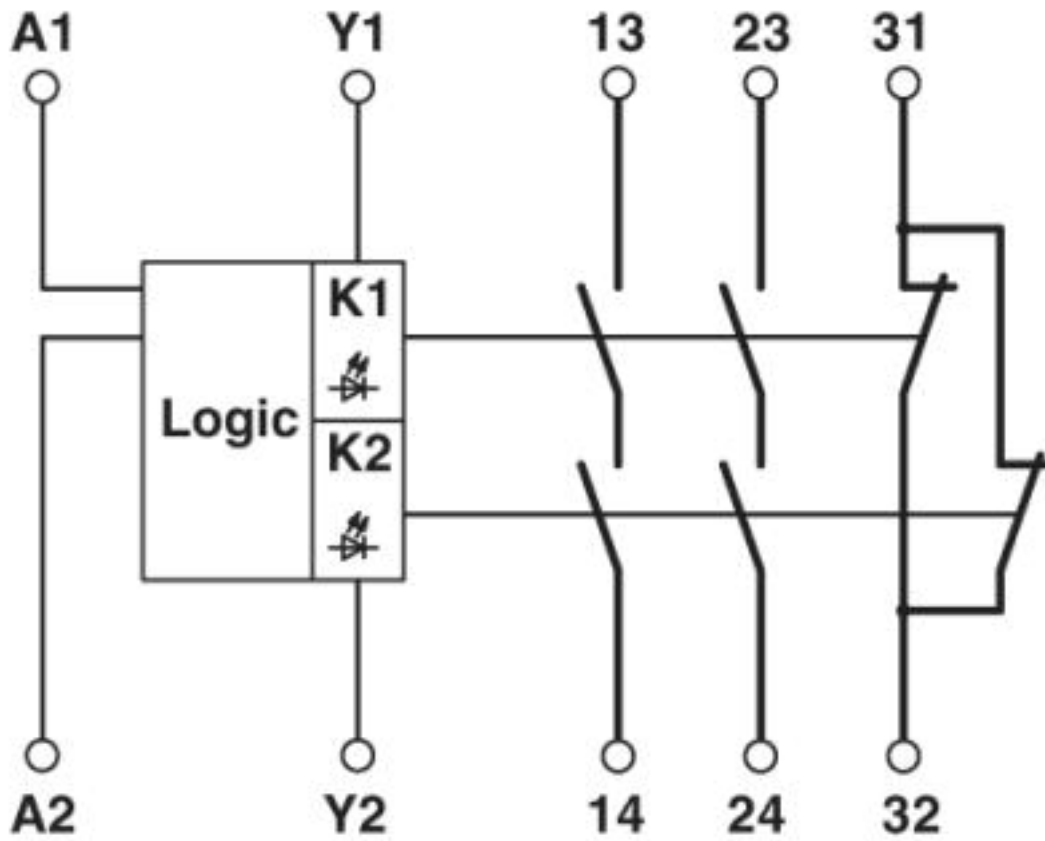

1 = logics

# Safety relays - PSR-SCP- 24DC/ESP4/2X1/1X2 - 2981020


Circuit diagram

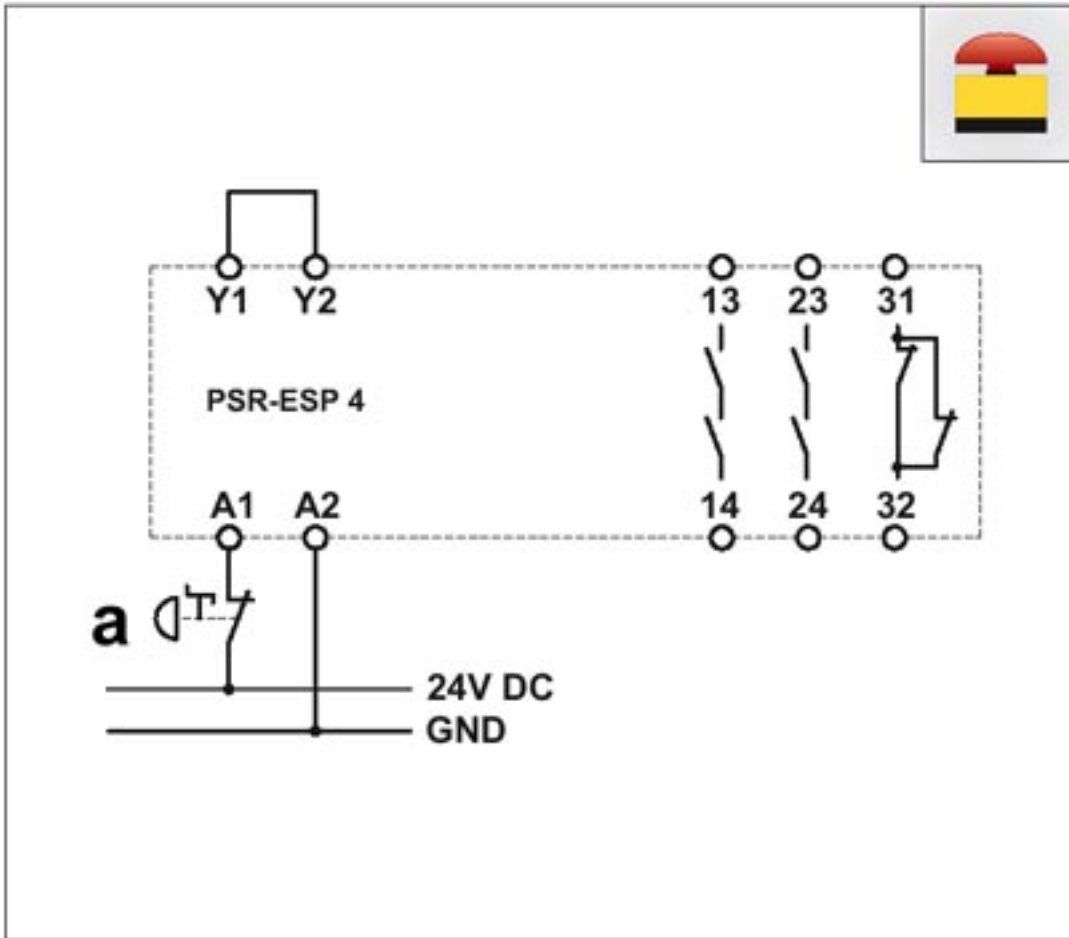

One-channel emergency stop circuit with automatic activation, suitable up to safety category 2.

# Safety relays - PSR-SCP- 24DC/ESP4/2X1/1X2 - 2981020


Circuit diagram

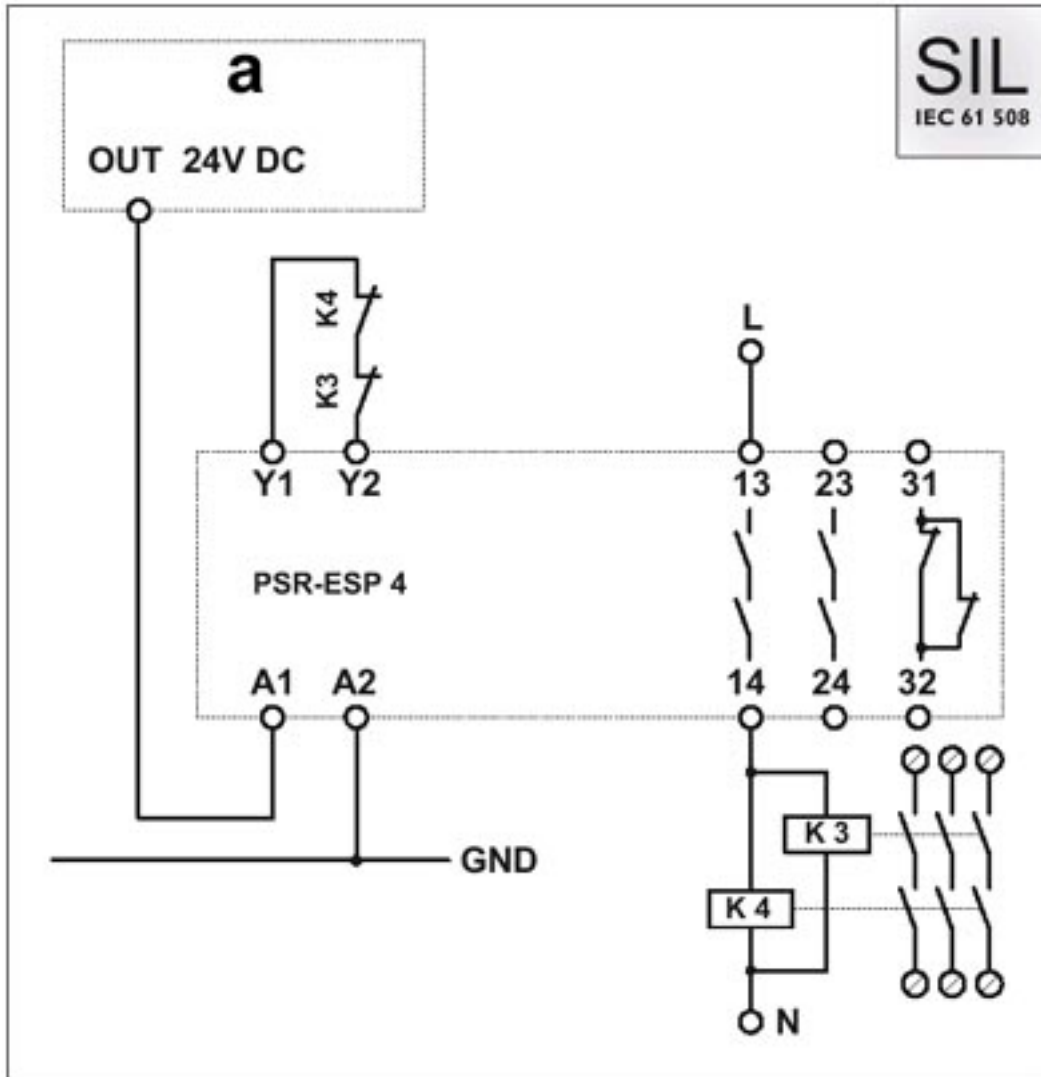

One-channel evaluation of a safety controller with automatic activation, suitable up to SIL 3.

# Safety relays - PSR-SCP- 24DC/ESP4/2X1/1X2 - 2981020

Circuit diagram

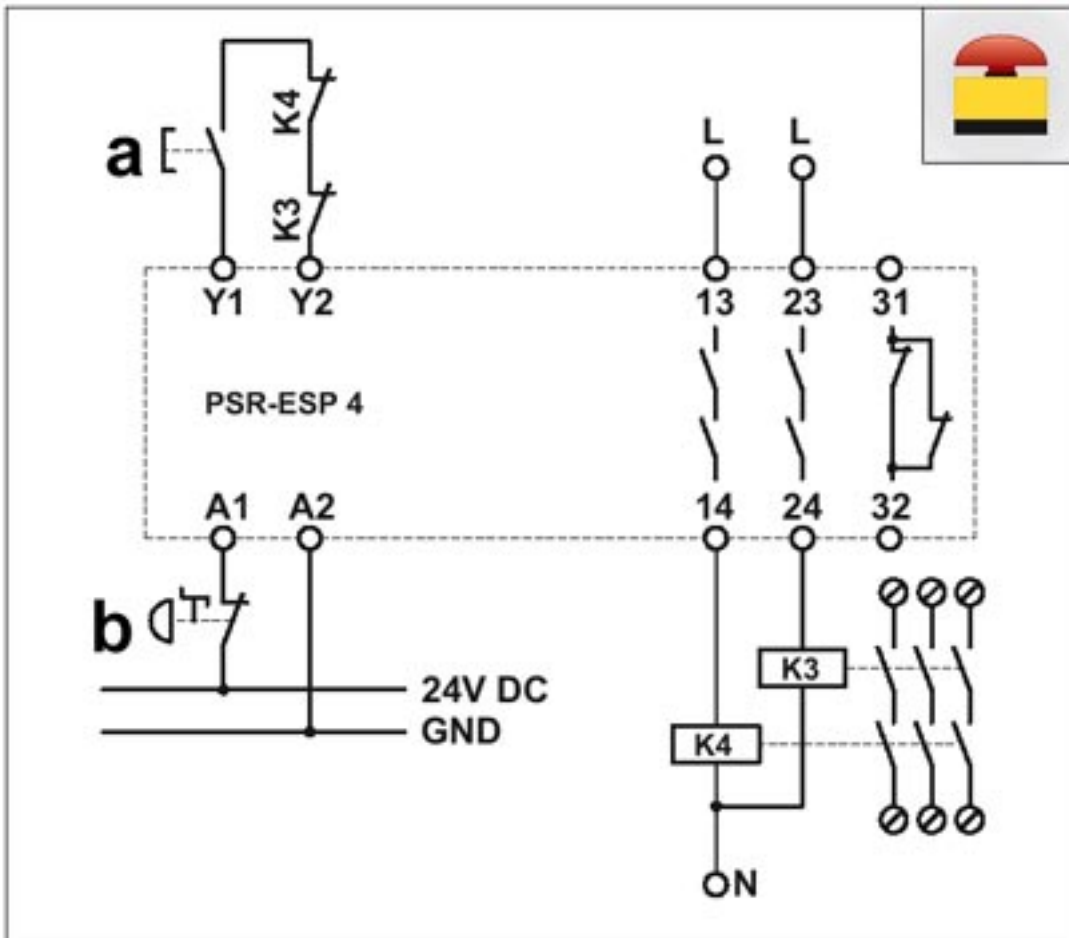


One-channel emergency stop circuit with manual activation and monitored contact expansion, suitable up to safety category 2.




# Safety relays - PSR-SCP- 24DC/ESP4/2X1/1X2 - 2981020

Circuit diagram

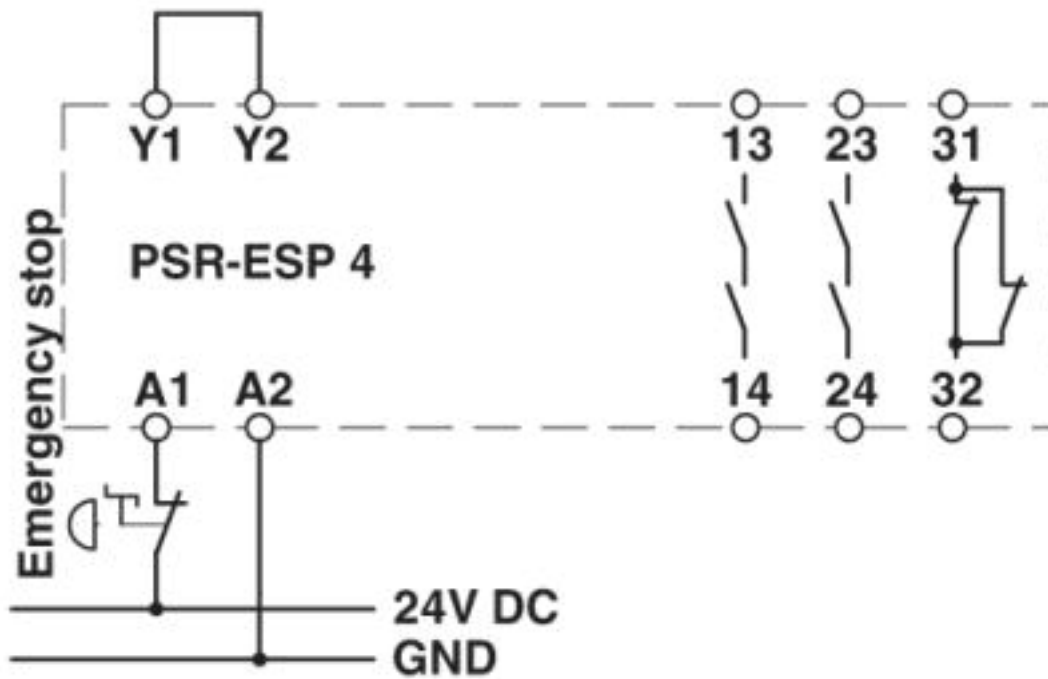


# Safety relays - PSR-SCP- 24DC/ESP4/2X1/1X2 - 2981020

Circuit diagram

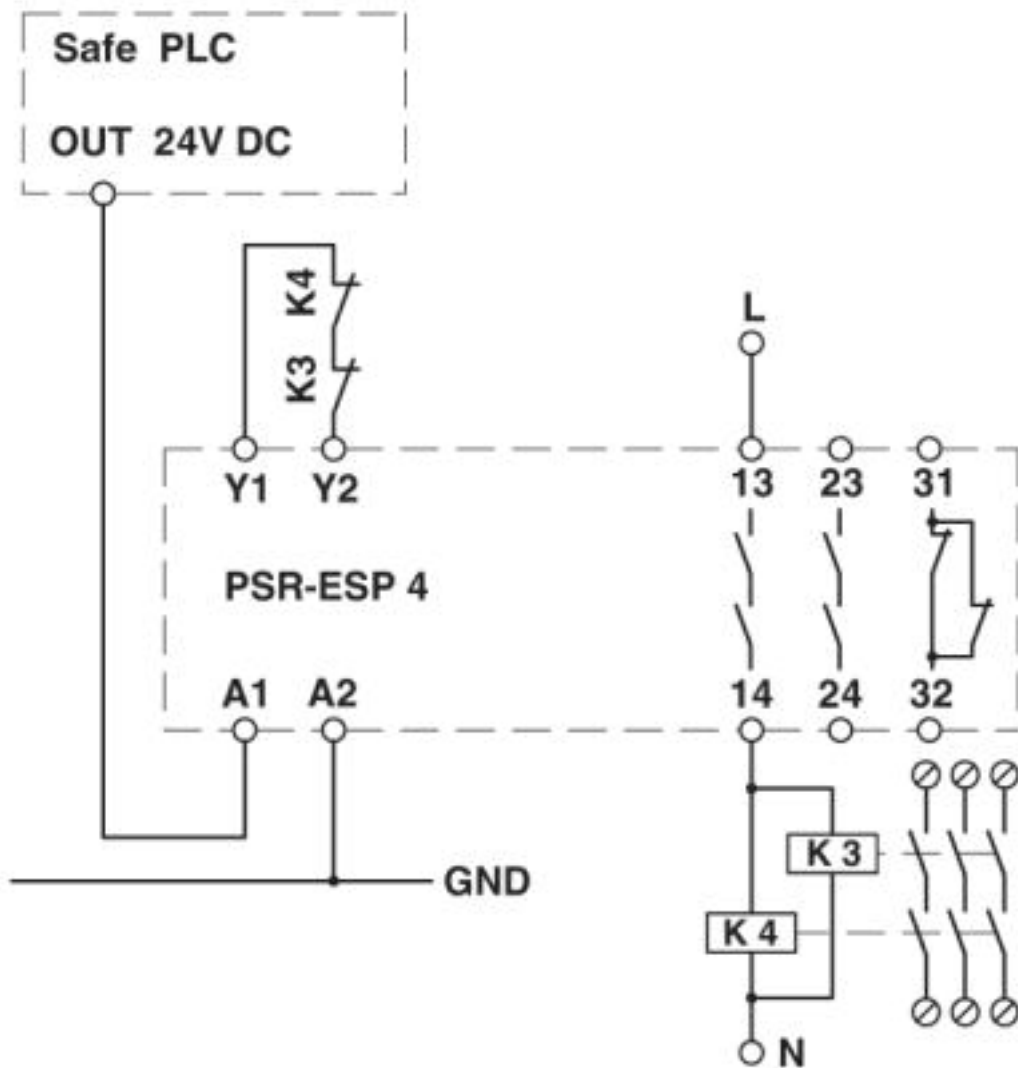

# Safety relays - PSR-SCP- 24DC/ESP4/2X1/1X2 - 2981020

Circuit diagram

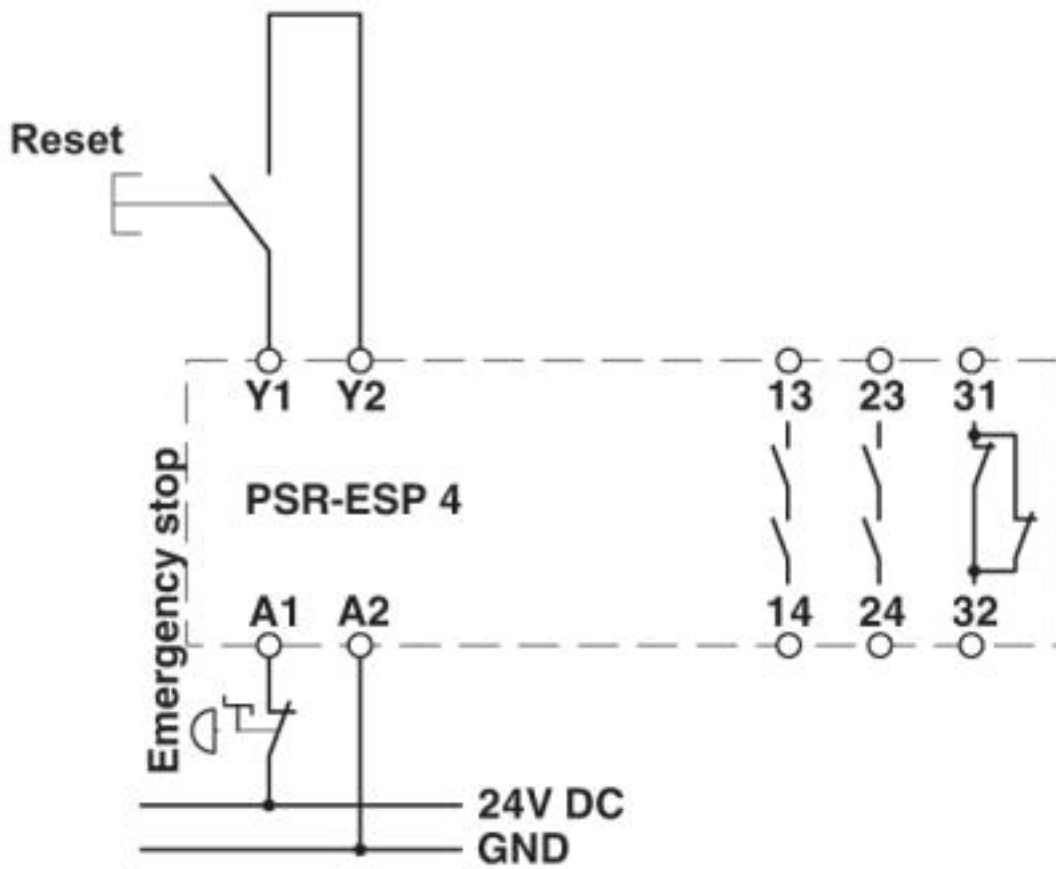

© Phoenix Contact 2013 - all rights reserved  
<http://www.phoenixcontact.com>