

# Coupling relay - PSR-SCP- 24DC/FSP/1X1/1X2 - 2981978

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Coupling relay for SIL 3 high/low demand applications, couples digital output signals to the periphery, 1 enabling current path, 1 signal contact, module for safe state off applications, test pulse filter, fuse, plug-in screw connection, 17.5 mm width

## Product Features

- Narrow 17.5 mm housing
- Up to SIL 3 according to IEC 61508
- Forcibly guided contacts according to EN 50205
- Easy proof test according to IEC 61508 thanks to integrated signal contact
- Long service life thanks to filtering of controller test pulses
- With built-in, replaceable fuse in the enabling current path
- One enabling current path
- Couples digital output signals from failsafe controllers to I/O devices (valves, etc.) for electrical isolation and power adaptation



## Key commercial data

|                         |               |
|-------------------------|---------------|
| <b>package_quantity</b> | 1             |
| <b>GTIN</b>             | 4046356448352 |

## Technical data

Note:

|                                |   |
|--------------------------------|---|
| <b>Utilization restriction</b> | EMC: class A product, see manufacturer's declaration in the download area |
|--------------------------------|---|

## Dimensions

|               |          |
|---------------|----------|
| <b>Width</b>  | 17.5 mm  |
| <b>Height</b> | 99 mm    |
| <b>Depth</b>  | 114.5 mm |

## Ambient conditions

|  |   |
|--|---|
| <b>Ambient temperature (operation)</b>               | -20 °C ... 55 °C  |
| <b>Ambient temperature (storage/transport)</b>       | -40 °C ... 80 °C  |
| <b>Max. permissible humidity (storage/transport)</b> | ≤ 75 % (Condensation and icing are not permitted based on the average annual temperature) |
| <b>Max. permissible humidity (storage/transport)</b> | ≤ 85 % (On an individual basis, condensation and icing are not permitted)                 |
| <b>Shock</b>   | 15 g  |

# Coupling relay - PSR-SCP- 24DC/FSP/1X1/1X2 - 2981978

## Technical data

### Ambient conditions

|                       |     |
|-----------------------|-----|
| Vibration (operation) | 2 g |
|-----------------------|-----|

### Input data

|   |              |
|---|--------------|
| Nominal input voltage $U_N$               | 24 V DC      |
| Input voltage range in reference to $U_N$ | 0.85 ... 1.1 |
| Typical input current at $U_N$            | 55 mA        |
| Typical inrush current                    | 100 mA       |
| Typical response time                     | 50 ms        |
| Typical release time                      | 50 ms        |
| Recovery time                             | 1 s          |

### Output data

|  |   |
|--|---|
| Contact type                                 | 1 undelayed enabling current path                     |
| Contact type                                 | 1 undelayed confirmation current path                 |
| Contact material                             | AgCuNi, + 0.2 $\mu$ m Au                              |
| Maximum switching voltage                    | 250 V AC/DC   |
| Minimum switching voltage                    | 15 V AC/DC  |
| Limiting continuous current                  | 5 A (N/O contact, pay attention to the derating)      |
| Limiting continuous current                  | 100 mA (N/C contact)                                  |
| Maximum inrush current                       | 5 A   |
| Inrush current, minimum                      | 5 mA  |
| Sq. Total current                            | 25 A <sup>2</sup> (observe derating)                  |
| Interrupting rating (ohmic load) max.        | 120 W (24 V DC, $\tau$ = 0 ms, N/C contact: 2.4 W)    |
| Interrupting rating (ohmic load) max.        | 144 W (48 V DC, $\tau$ = 0 ms, N/C contact: 4.8 W)    |
| Interrupting rating (ohmic load) max.        | 66 W (110 V DC, $\tau$ = 0 ms, N/C contact: 11 W)     |
| Interrupting rating (ohmic load) max.        | 60 W (220 V DC, $\tau$ = 0 ms, N/C contact: 22 W)     |
| Interrupting rating (ohmic load) max.        | 1250 VA (250 V AC, $\tau$ = 0 ms, N/C contact: 25 VA) |
| Maximum interrupting rating (inductive load) | 72 W (24 V DC, $\tau$ = 40 ms, N/C contact: 2.4 W)    |
| Maximum interrupting rating (inductive load) | 36 W (48 V DC, $\tau$ = 40 ms, N/C contact: 4.8 W)    |
| Maximum interrupting rating (inductive load) | 36 W (110 V DC, $\tau$ = 40 ms, N/C contact: 11 W)    |
| Maximum interrupting rating (inductive load) | 48 W (220 V DC, $\tau$ = 40 ms, N/C contact: 22 W)    |
| Switching capacity min.                      | 75 mW   |
| Output fuse                                  | 5 A T (Fuse)  |

### General

|                                  |  |
|----------------------------------|--|
| Relay type                       | Electromechanically forcibly guided, dust-proof relay. |
| Mechanical service life          | Approx. 10 <sup>7</sup> cycles                         |
| Mounting position                | Any  |
| Assembly instructions            | In rows with zero spacing                              |
| Category according to EN 13849-1 | 4  |
| Stop category                    | 0  |
| Name                             | Air and creepage distances between the power circuits  |
| Standards/regulations            | DIN EN 50178   |

# Coupling relay - PSR-SCP- 24DC/FSP/1X1/1X2 - 2981978

## Technical data

### General

|   |   |
|---|---|
| <b>Rated surge voltage / insulation</b> | 6 kV / Safe isolation, increased insulation |
| <b>Rated insulation voltage</b>         | 250 V AC                                    |
| <b>Pollution degree</b>                 | 2   |
| <b>Surge voltage category</b>           | III   |

### Connection data

|   |                     |
|---|---------------------|
| <b>Conductor cross section solid min.</b>     | 0.2 mm <sup>2</sup> |
| <b>Conductor cross section solid max.</b>     | 2.5 mm <sup>2</sup> |
| <b>Conductor cross section stranded min.</b>  | 0.2 mm <sup>2</sup> |
| <b>Conductor cross section stranded max.</b>  | 2.5 mm <sup>2</sup> |
| <b>Conductor cross section AWG/kcmil min.</b> | 24                  |
| <b>Conductor cross section AWG/kcmil max</b>  | 12                  |
| <b>Stripping length</b>                       | 7 mm                |
| <b>Screw thread</b>                           | M3                  |
| <b>Connection method</b>                      | Screw connection    |

## classifications

### eCl@ss

|                   |          |
|-------------------|----------|
| <b>eCl@ss 4.0</b> | 27371102 |
| <b>eCl@ss 4.1</b> | 27371102 |
| <b>eCl@ss 5.0</b> | 27371901 |
| <b>eCl@ss 5.1</b> | 27371901 |
| <b>eCl@ss 6.0</b> | 27371819 |
| <b>eCl@ss 7.0</b> | 27371819 |
| <b>eCl@ss 8.0</b> | 27371819 |

### ETIM

|                 |          |
|-----------------|----------|
| <b>ETIM 2.0</b> | EC001449 |
| <b>ETIM 3.0</b> | EC001449 |
| <b>ETIM 4.0</b> | EC001449 |
| <b>ETIM 5.0</b> | EC001449 |

### UNSPSC

|                      |          |
|----------------------|----------|
| <b>UNSPSC 6.01</b>   | 30211901 |
| <b>UNSPSC 7.0901</b> | 39121501 |
| <b>UNSPSC 11</b>     | 39121501 |
| <b>UNSPSC 12.01</b>  | 39121501 |
| <b>UNSPSC 13.2</b>   | 39121501 |


## approvals

# Coupling relay - PSR-SCP- 24DC/FSP/1X1/1X2 - 2981978

## approvals

---


### Approval details



### Drawings


# Coupling relay - PSR-SCP- 24DC/FSP/1X1/1X2 - 2981978

Connection diagram

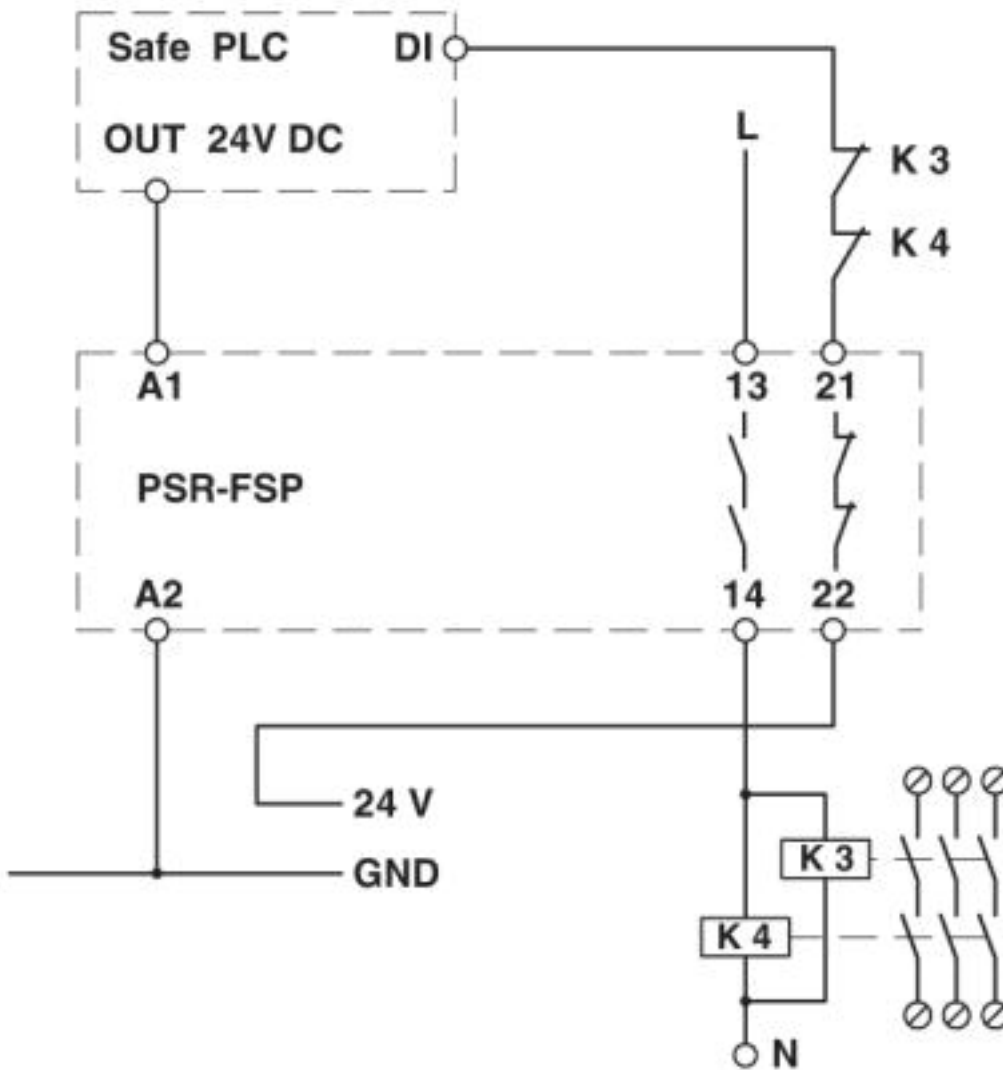


# Coupling relay - PSR-SCP- 24DC/FSP/1X1/1X2 - 2981978

Connection diagram

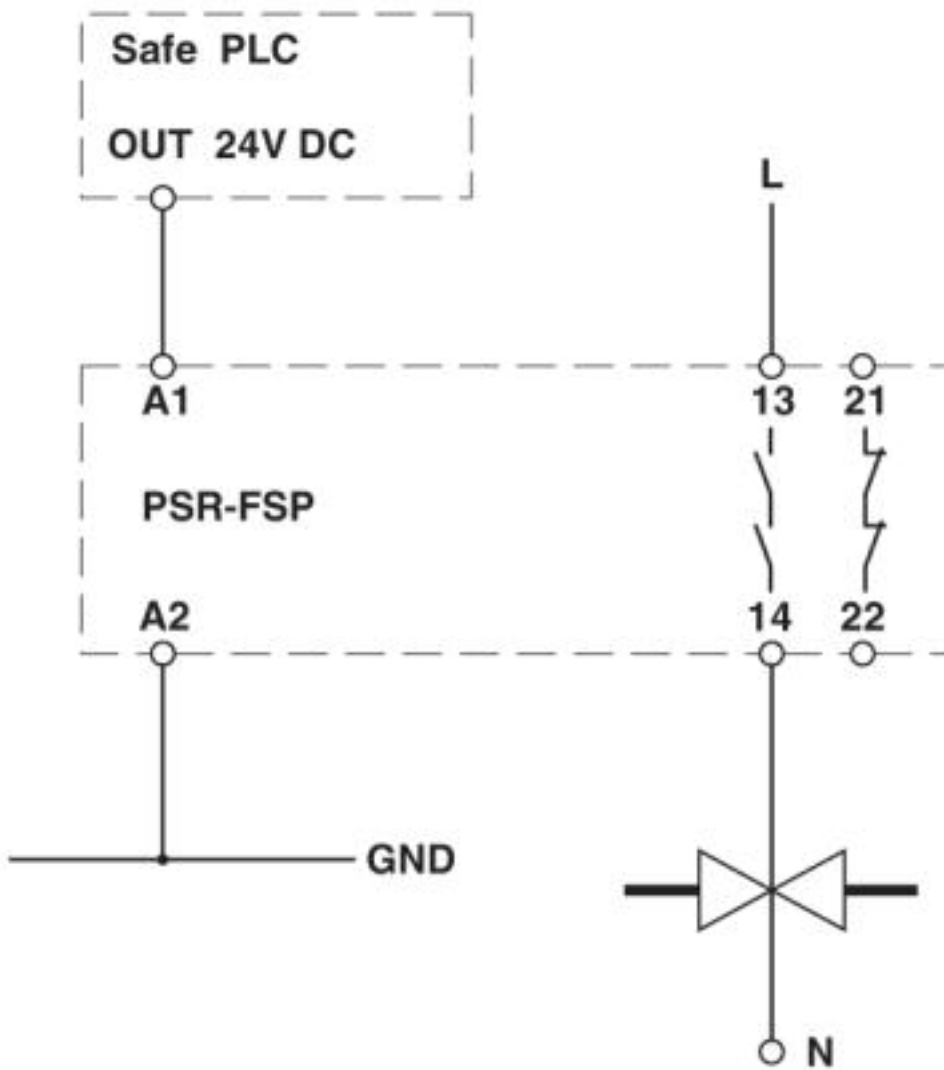

# Coupling relay - PSR-SCP- 24DC/FSP/1X1/1X2 - 2981978


Application drawing

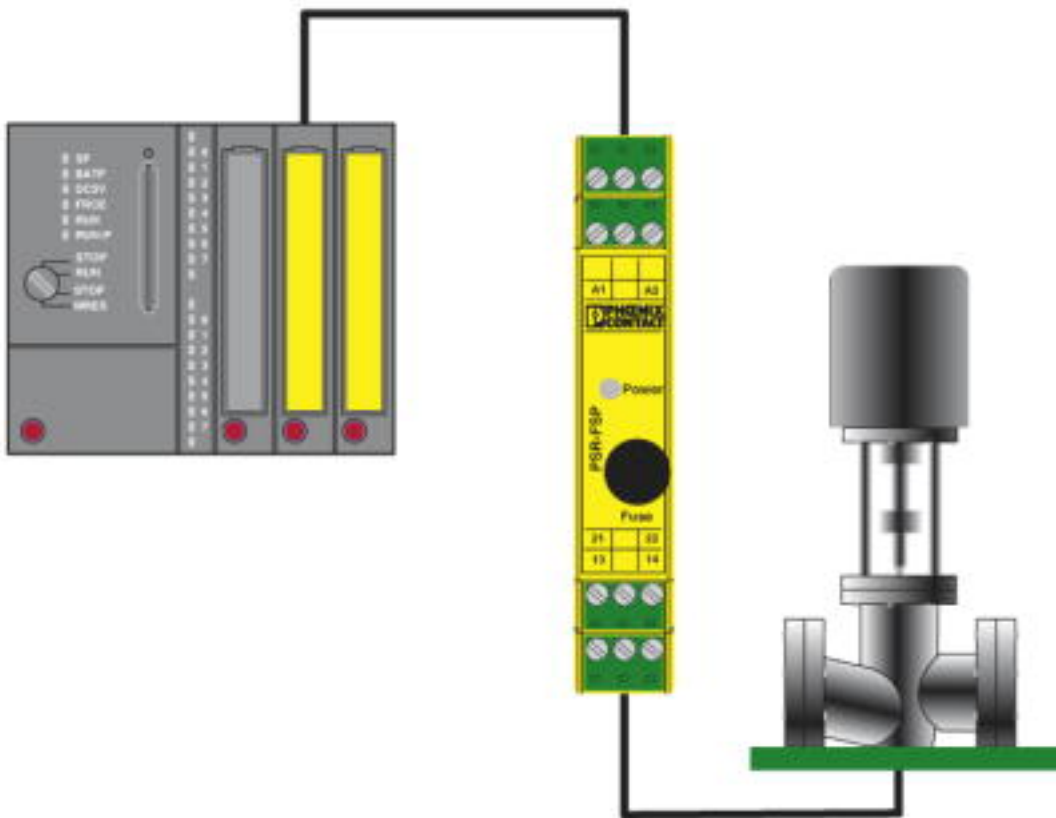

Example of electrical isolation of a safety PLC output from the field.

# Coupling relay - PSR-SCP- 24DC/FSP/1X1/1X2 - 2981978


Circuit diagram

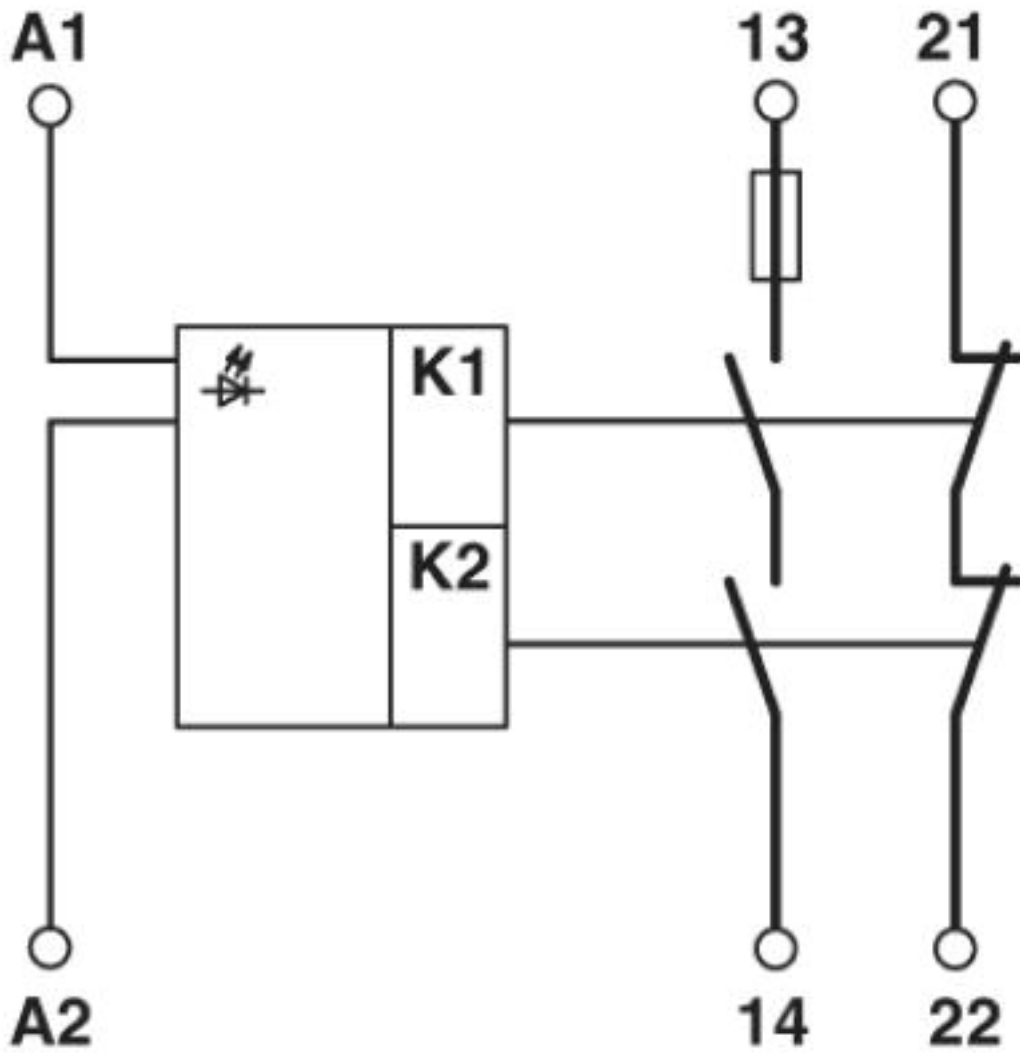




# Coupling relay - PSR-SCP- 24DC/FSP/1X1/1X2 - 2981978

Circuit diagram

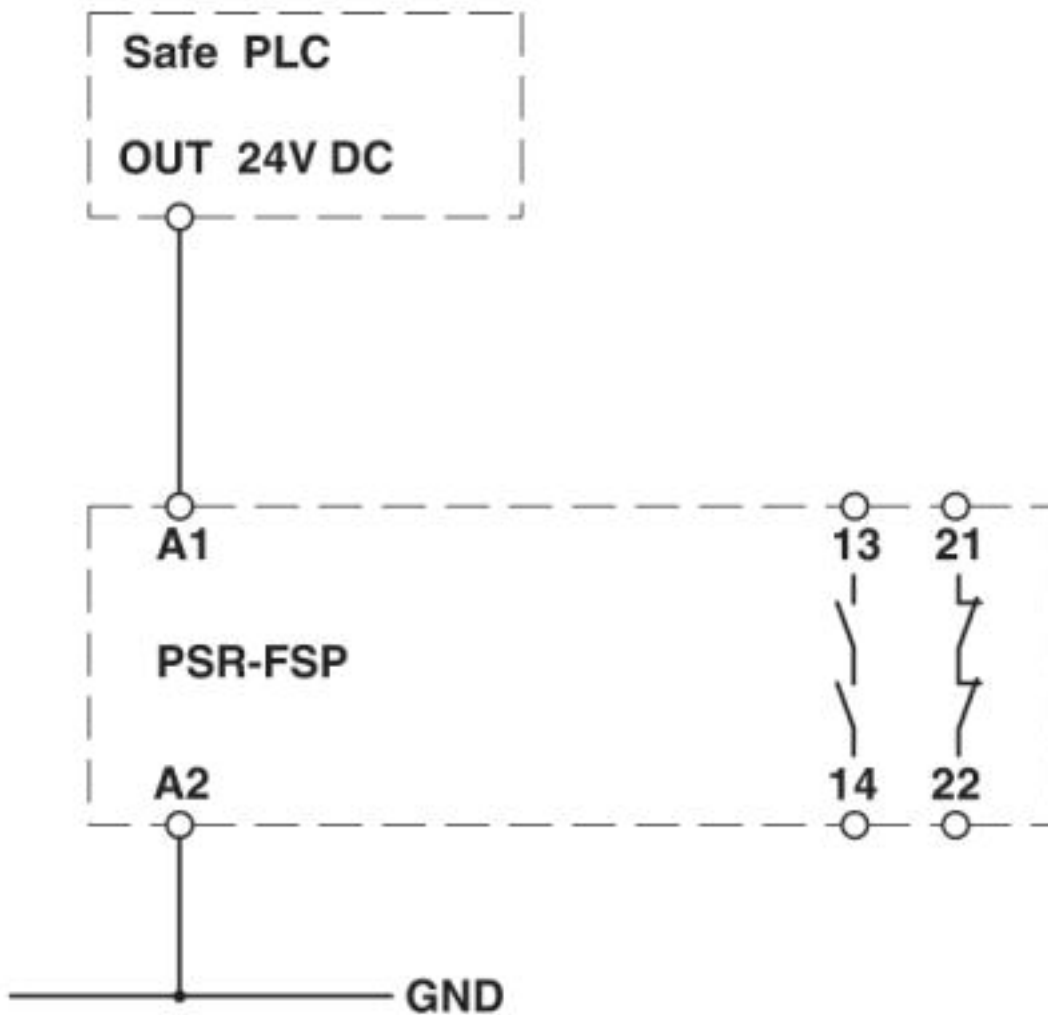

# Coupling relay - PSR-SCP- 24DC/FSP/1X1/1X2 - 2981978

Circuit diagram

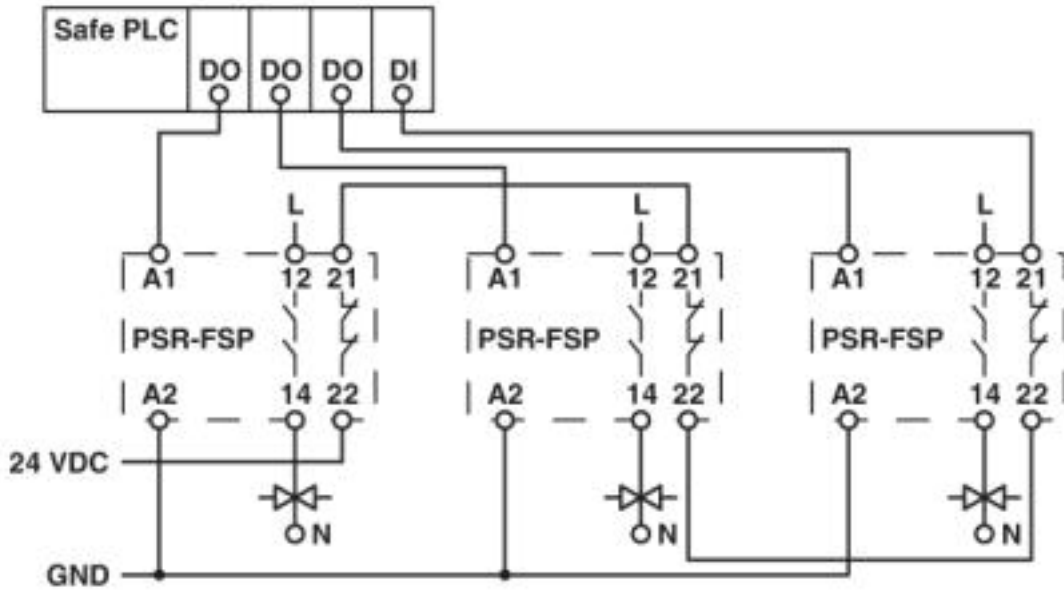

© Phoenix Contact 2013 - all rights reserved  
<http://www.phoenixcontact.com>