



46.02mm Dia 15 Turn Dial




MECHANICAL SPECIFICATIONS	
PARAMETER	
Mounting	Direct to shaft with # 4 - 40 hex socket set screw located adjacent to No.75 on graduated dial.
Numeral Size: Counter wheel:	0.90 H x 0.013 Inches W (2.29 x 0.33cm)
Graduated dial:	0.109 x 0.018 Inches (2.77 x 0.46cm)
Graduation Size: Numeral and every Fifth	0.55 Inches L (1.40cm)
Intermediate	0.035 Inches L (0.89cm)
Width	0.012 Inches (0.30cm)
Weight	3.0 maximum (85.05)

FEATURES

- · Round Vernier Scale
- 1-13/16" Dia.
- 1/4" or 1/8" Shaft Adapter
- · Satin Chrome Finish with Black Markings
- · Black Chrome Finish with White Markings
- · Brushed Chrome Finish with Black Markings

OPERATIONAL SPECIFICATIONS	
Readout and Operation	1499 turns total
	The number in window (0 thru 14)
	indicates completed number of turns of the
	drive sleeve. Graduated circular dial
	indicates the percent of the partial
	turn of the drive sleeve
Transfer Point	The number in center of window shall
	change as graduated dial rotates
	between 94 and 0
Rotation	Readout shall increase with clockwise
	and decrease with counterclockwise rotation
Accuracy	Zero backlash between graduated
-	dial and drive sleeve

DIMENSIONS in inches (millimeters)

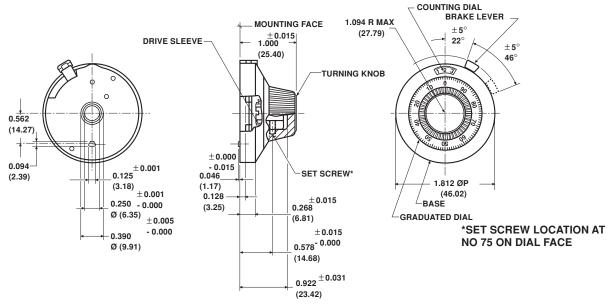

PROPERING INFORMATION 21 1 1 MODEL SHAFT DIAMETER AND ACCOMMODATION FINISH AND OTHER FEATURES 1. 1/4" Shaft (standard) 3. 1/8" Shaft adapter Example: 21 - 1 - 11 11 Satin chrome, black markings 21. Black chrome, white markings 31. Brushed chrome, black markings 31. Brushed chrome, black markings