


Housing design H-B. The industry standard.

Product Description

Ideal for many applications due to a wide range of housings and inserts

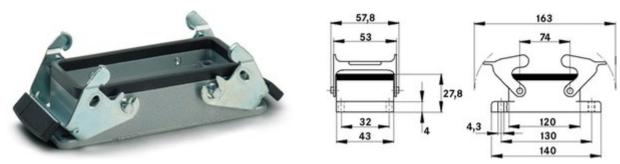

RoHS 🗸

Application range

- Plant engineering
- Light & sound technology
- Plastics industry

Benefits

· Ideal for many applications due to a wide range of housings and inserts

Product features

- Panel-mount base
- Dual levers
- Included: flat gasket



Product Information

EPIC® H-B 24 AG

Page 2 of 2

Valid: 07.02.2012

Technical Data

Material

Housing: powder-coated aluminium alloy, grey Lever: zinc-plated steel Sealing: NBR **Protection rating** IP 65 (latched)

Temperature range

-40 °C to +100 °C, short-term up to +125 °C

Article List

Part	Article	Pieces
number		/ PU
H-B housing: panel-mount base (double lever)		
10102000	H-B 24 AG	5

Footnote:

Photographs are not to scale and do not represent detailed images of the respective products.