used for: D-SUB



SHORT SCREW
INCL. WASHER AND O-RING

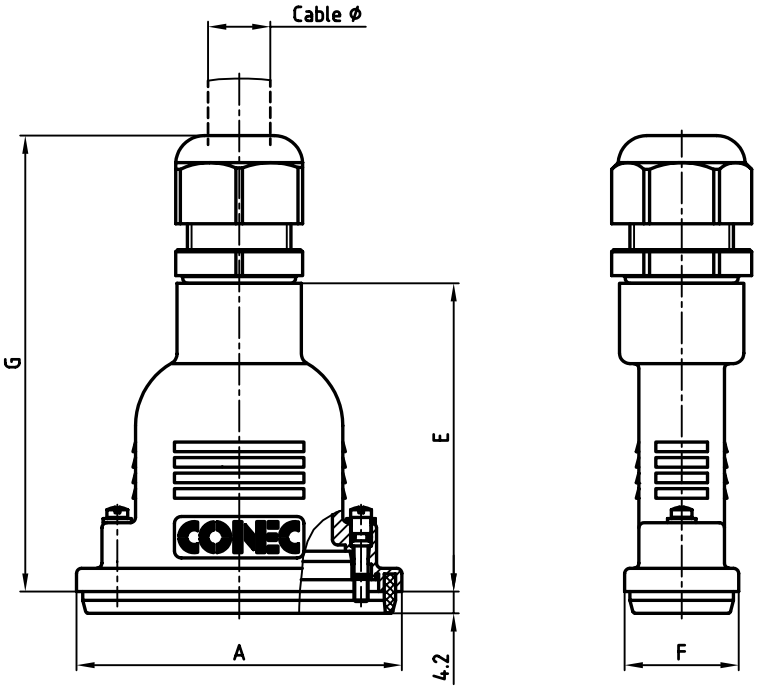

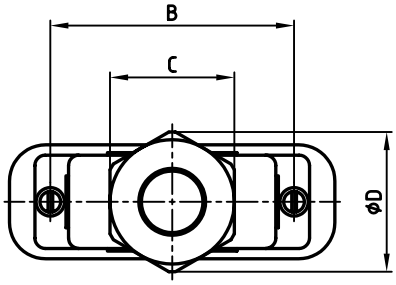

Shellsize	A	B	C	øD	E	F	G^{+1}_{-3}	Cable ø	Part-NO.
1	40.76	25.0	SW 22	24.6	51.0	22.0	77.0	5 - 10	**165X14869X**
2	49.06	33.3	SW 24	26.5	51.0	22.0	79.0	6 - 12	**165X14879X**
3	62.80	47.04	SW 24	26.5	59.5	22.0	87.5	6 - 12	**165X14889X**
4	78.86	63.5	SW 33	36.2	67.0	22.0	99.0	9 - 16	**165X14899X**
5	76.46	61.1	SW 42	47.0	67.0	24.8	107.0	13 - 20	**165X14909X**

Directive 2002/95/EC „RoHS" Compliant

NOTES:
1. HOOD: PBT GF; BLACK
2. SCREWS: STAINLESS STEEL

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance

dim. in mm

	date	name
2004		
drawn	25.11.	Lehmenkühler
appd.	25.11.	Mickenbecker
norm		
d-old		

scale: 1:1
material: SEE NOTES

title:
WATER RESISTANT D-SUB HOOD
9-50pos.
with short screw

dwg no: 16K1A1289
AutoCAD 2004
DIN-A 3
sh: 1/1

part no: SEE TABLE