used for: D-SUB




SHORT SCREW
INCL. WASHER AND O-RING

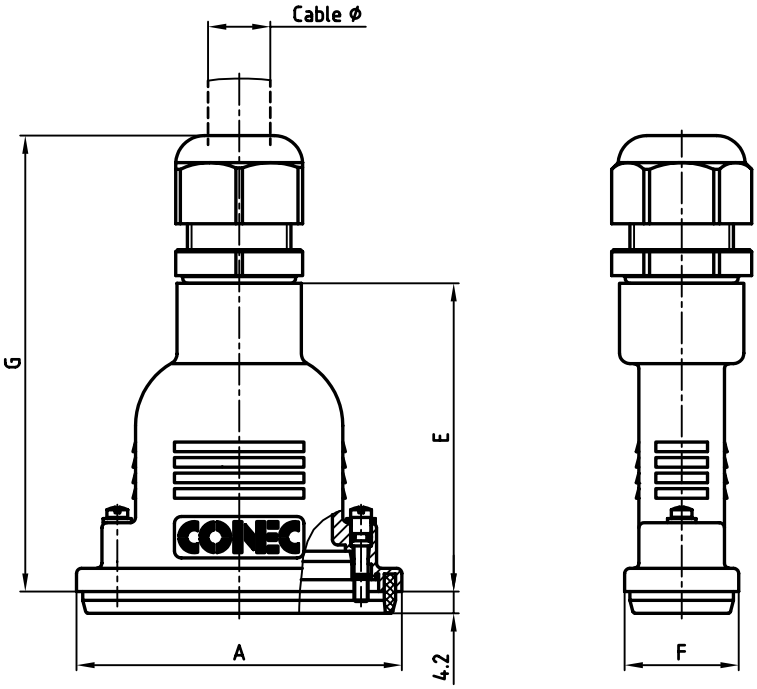


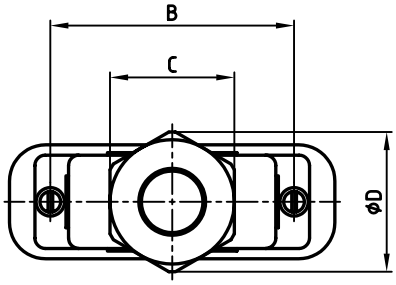


| Shellsize | A | B | C | øD | E | F | $G^{+1}_{-3}$ | Cable ø | Part-NO. |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 40.76 | 25.0 | SW 22 | 24.6 | 51.0 | 22.0 | 77.0 | 5 - 10 | **165X14869X** |
| 2 | 49.06 | 33.3 | SW 24 | 26.5 | 51.0 | 22.0 | 79.0 | 6 - 12 | **165X14879X** |
| 3 | 62.80 | 47.04 | SW 24 | 26.5 | 59.5 | 22.0 | 87.5 | 6 - 12 | **165X14889X** |
| 4 | 78.86 | 63.5 | SW 33 | 36.2 | 67.0 | 22.0 | 99.0 | 9 - 16 | **165X14899X** |
| 5 | 76.46 | 61.1 | SW 42 | 47.0 | 67.0 | 24.8 | 107.0 | 13 - 20 | **165X14909X** |

Directive 2002/95/EC „RoHS" Compliant

**NOTES:**
1. HOOD: PBT GF; BLACK
2. SCREWS: STAINLESS STEEL

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

| rev. | description | date | name |
|---|---|---|---|

tolerance

dim. in mm

| | date | name |
|---|---|---|
| 2004 | | |
| drawn | 25.11. | Lehmenkühler |
| appd. | 25.11. | Mickenbecker |
| norm | | |
| d-old | | |

scale: 1:1
material: SEE NOTES

title:
**WATER RESISTANT D-SUB HOOD**
9-50pos.
with short screw

dwg no: 16K1A1289
AutoCAD 2004
DIN-A 3
sh: 1/1

part no: SEE TABLE