

Loop-powered isolators - MINI MCR-SL-1CP-I-I - 2864419

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



MCR loop-powered isolator, 1-channel, for the electrical isolation of current signals without auxiliary power, with screw connection

The illustration shows the 2-channel version with screw connection

Product Description

The 6.2 mm narrow passive loop-powered isolator MINI MCR-SL-...CP-I-I... is used for the electrical isolation and filtering of 0...20 mA and 4...20 mA standard current signals without additional supply voltage.

Product Features

- Voltage drop at isolating amplifier of just 1.7 V
- Does not require additional auxiliary voltage
- Supplied by an input loop
- Two channels on a design width of just 6.2 mm
- Highly-compact 2-wire passive isolators for electrical isolation and filtering of standard analog signals



Key commercial data

package_quantity	1
GTIN	4017918974848

Technical data

Dimensions

Width	6.2 mm
Height	93.1 mm
Depth	102.5 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 65 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Degree of protection	IP20

Input data

Description of the input	Current input
Configurable/programmable	No

Loop-powered isolators - MINI MCR-SL-1CP-I-I - 2864419

Technical data

Input data

Current input signal	0 mA ... 20 mA
Current input signal	4 mA ... 20 mA
Max. input voltage	18 V
Max. input current	40 mA
Response current	approx. 190 µA
Input voltage limitation	18 V
Voltage dissipation	1.7 V (at I = 20 mA)

Output data

Output name	Current output
Configurable/programmable	No
Current output signal	0 mA ... 20 mA
Current output signal	4 mA ... 20 mA
Load/output load current output	< 600 Ω (at I = 20 mA output signal)

Power supply

Supply voltage range	(no separate supply voltage necessary)
----------------------	--

Connection data

Connection method	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	12
Stripping length	12 mm
Screw thread	M3

General

No. of channels	1
Maximum transmission error	≤ 0.1 % (of final value)
Maximum temperature coefficient	≤ 0.002 %/K (of measured value / 100 Ω load)
Additional error, load-dependent	0.03 % (of measured value / 100 Ω load)
Limit frequency (3 dB)	75 Hz
Step response (10-90%)	5 ms (At 600 Ω load)
Electrical isolation	Basic insulation according to EN 61010
Surge voltage category	II
Pollution degree	2
Rated insulation voltage	50 V AC/DC
Test voltage input/output	1.5 kV (50 Hz, 1 min.)
Test voltage channel/channel	1.5 kV (50 Hz, 1 min.)
Electromagnetic compatibility	Conformance with EMC Directive 2004/108/EC
Noise emission	EN 61000-6-4

Loop-powered isolators - MINI MCR-SL-1CP-I-I - 2864419

Technical data

General

Noise immunity	EN 61000-6-2 When being exposed to interference, there may be minimal deviations.
Color	green
Housing material	PBT
Mounting position	Any
Assembly instructions	The T connector can be used to bridge the supply voltage. It can be snapped onto a 35 mm DIN rail according to EN 60715.
Conformance	CE-compliant
ATEX	# II 3 G Ex nA II T6 X
UL, USA / Canada	UL 508 Recognized
UL, USA / Canada	Class I, Div. 2, Groups A, B, C, D
GL	GL EMC 2 D

EMC data

Name	Electromagnetic RF field
Standards/regulations	EN 61000-4-3
Evaluation criterion	A
Name	Fast transients (burst)
Standards/regulations	EN 61000-4-4
Evaluation criterion	B
Name	Conducted interferences
Standards/regulations	EN 61000-4-6
Evaluation criterion	A

classifications

eCl@ss

eCl@ss 4.0	27210120
eCl@ss 4.1	27210120
eCl@ss 5.0	27210120
eCl@ss 5.1	27210120
eCl@ss 6.0	27210120
eCl@ss 7.0	27210120
eCl@ss 8.0	27210120

ETIM

ETIM 2.0	EC001485
ETIM 3.0	EC001485
ETIM 4.0	EC001485
ETIM 5.0	EC001485

UNSPSC

UNSPSC 6.01	30211506
UNSPSC 7.0901	39121008

Loop-powered isolators - MINI MCR-SL-1CP-I-I - 2864419

classifications





UNSPSC

UNSPSC 11	39121008
UNSPSC 12.01	39121008
UNSPSC 13.2	39121008

approvals

UL Recognized / cUL Recognized / ATEX / cULus Recognized / UL Recognized / cUL Recognized / GL / cULus Recognized /

Approval details



accessories

DIN rail connector

Loop-powered isolators - MINI MCR-SL-1CP-I-I - 2864419

accessories

ME 6,2 TBUS-2 1,5/5-ST-3,81 GN - 2869728



System adapter

MINI MCR-SL-V8-FLK 16-A - 2811268



Marking material

MINI MCR-DKL-LABEL - 2810272




MINI MCR DKL - 2308111




Drawings

Loop-powered isolators - MINI MCR-SL-1CP-I-I - 2864419

Application drawing

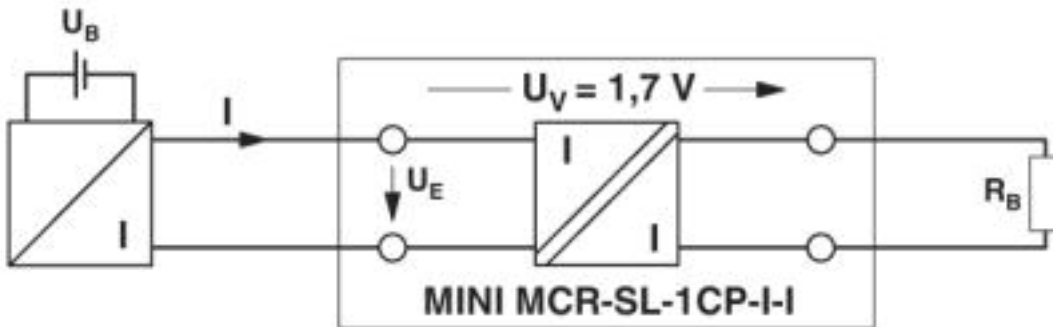


Block diagram

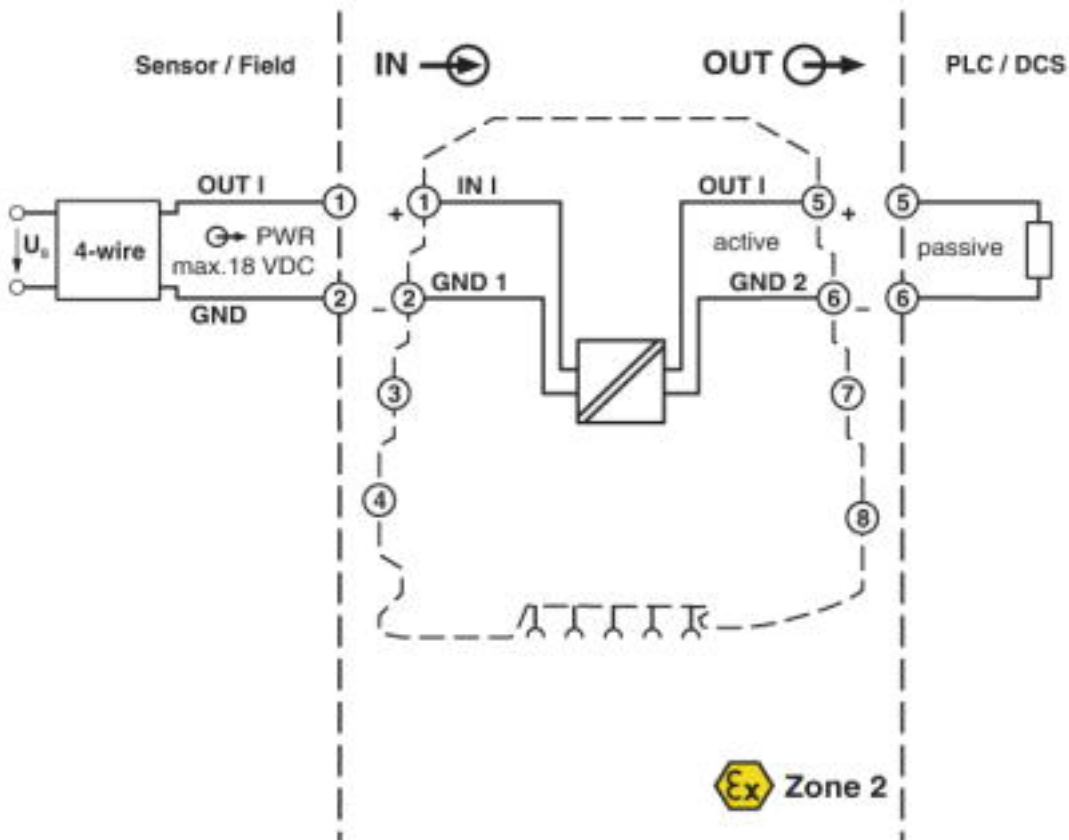

Loop-powered isolators - MINI MCR-SL-1CP-I-I - 2864419

Dimensioned drawing

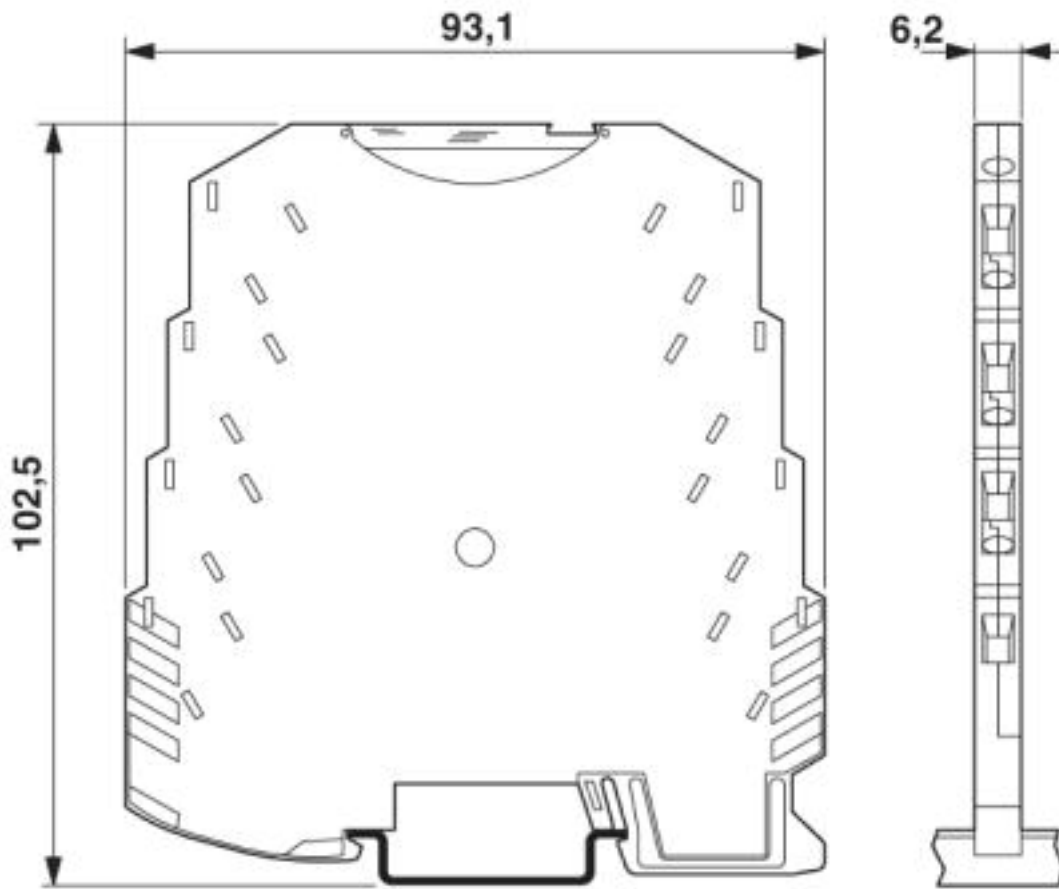

© Phoenix Contact 2013 - all rights reserved
<http://www.phoenixcontact.com>