

|                   |  |  |
|-------------------|--|--|
| U.I. Lapp<br>GmbH | <b>DATASHEET</b>                       |  |
|                   | <b>Conductor end sleeves insulated</b> | 61801770<br>14.11.2013   |

Conductor end sleeves with insulation for cabinet builders , according to DIN or German colour code, CSA approved, halogen-free



Halogen-free



### Application range

Control cabinets and equipment wiring

### Benefits

Funnel-shaped opening makes it easy to slip them onto the strands  
The conductor is permanently connected to the collar by crimping

### Norm references / Approvals

All DIN conductor end-sleeves are in accordance with DIN 46228 Part 4  
CSA approved, File-Number: LR 105629-1

### Remark

K = short; N = medium; HL = large; L = extra large; Other sizes and colours are available upon request  
Photographs are not to scale and do not represent detailed images of the respective products.


\*Under some circumstances the end sleeves withstand temperatures under -5°C. Please contact Lapp Kabel to clarify the specific application area.

### Technical Data

|                       |                                  |
|-----------------------|----------------------------------|
| Article designation:  | AHI DIN L 2,5/18                 |
| For mm <sup>2</sup> : | 2,5                              |
| AWG:                  | 14                               |
| Colour:               | blue                             |
| l1 mm:                | 25                               |
| l2 mm:                | 18                               |
| d 1 mm:               | 2.3                              |
| s1 mm:                | 0.15                             |
| d 2 mm:               | 4.2                              |
| s2 mm:                | 0.3                              |
| Pieces / PU:          | 500                              |
| Note:                 | Halogen-free                     |
| Material:             | Copper/PP<br>Surface: tin-plated |
| Temperature range:    | -5°C to +105°C*                  |

|                    |   |       |
|--------------------|---|-------|
| Product Management | Document: Conductor end sleeves insulated | 1 / 2 |
|--------------------|---|-------|

|                   |  |  |
|-------------------|--|--|
| U.I. Lapp<br>GmbH | <h1>DATASHEET</h1>                     |  <b>LAPP GROUP</b> |
|                   | <b>Conductor end sleeves insulated</b> | 61801770<br>14.11.2013   |

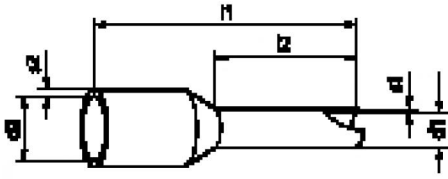

|                    |   |       |
|--------------------|---|-------|
| Product Management | Document: Conductor end sleeves insulated | 2 / 2 |
|--------------------|---|-------|