





| | |
|--|----------------------------|
| DATA SHEET | 63108010 |
| Flanged fork terminals 0,5 – 2,5 mm² | valid from : 18.12.2003 |

Technical data:

- electrolytic copper
- tin plated
- brazed barrel
- polycarbonate insulation
- easy-entry
- not for solid conductors

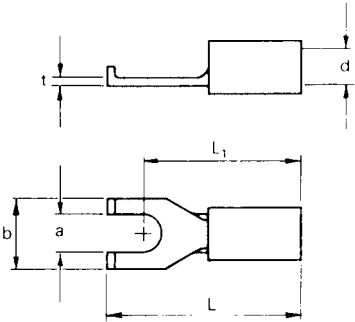

For more safety on site all insulated connectors have an imprint that indicates the cross section of the respective connector.
The crimping dies of the recommended tool emboss the cross section of the used die onto the connector insulation.



Easy-entry:

The insulation has an easy-entry device, which assures correct insertion of the conductor into the cable socket.

Flanged fork terminals 0,5 - 2,5 mm²

| mm ² | | Cat no | mm | | | L ₁ | L | s | g/100 | Note |
|-----------------|--|--------|------------|-----|-----|----------------|------|----|-------|------|
| | | | W | d | t | | | | | |
| 0,5-1,5 | | M3,5 | 63108010 | 7,5 | 4,0 | 0,7 | 17,5 | 21 | 7 | 69 |
| | | M4 | on request | < | < | < | < | < | < | 66 |
| 1,5-2,5 | | M4 | 63108040 | 7,5 | 4,5 | 0,8 | 17,5 | 21 | 7 | 85 |
| | | M5 | 63108050 | 9,0 | < | < | < | 23 | < | 98 |

