U.I. Lapp GmbH DATASHEET SKINDICHT® KU, KUS, KUK 51730050 14.11.2013

Enables the use of cable glands with smaller connection threads than the existing threaded holes

Glass fibre-reinforced for maximum mechanical stability





Space requirement

Application range

Machines Devices Housings

Design

PG connection thread

Design

SKINDICHT® KU with hexagon and flat design SKINDICHT® KUS with hexagon and larger height SKINDICHT® KUK with knurled heads

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Technical Data

Article designation / sizeOuter / inner: KU 29/16
Pieces / PU: 25

Colour delivered: Light grey (RAL 7035)


Material: Polyamide, glass fibre-reinforced

Temperature range: KU, KUS: -40°C to +100°C

KUK: -20°C to +80°C



U.I. Lapp GmbH	DATASHEET	LAPP GROUP
	SKINDICHT® KU, KUS, KUK	51730050
		14.11.2013

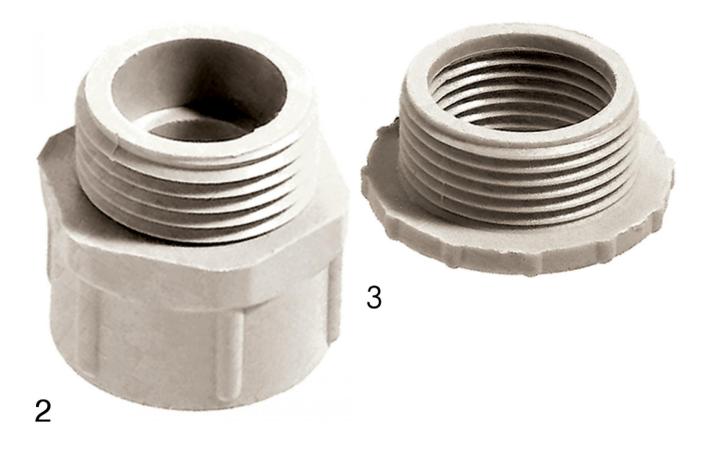

Product Management Docu	nent: SKINDICHT® KU, KUS, KUK	2/2
-------------------------	-------------------------------	-----