Faster, easier screen contact
Optimum, low-resistance 360° screen contact
Faster than any other comparable system
Uncomplicated and reliable
Maximum assembly freedom during adjustment



Reliability

Interference signals

Temperature-resistant

Variety of approval certifications

Application range
For EMC-compliant earthing of the copper braiding, or for cables with copper shaft sheath
Automation technology
Conveyor technology
High-power drives
Frequency converters

Design
NPT connection thread acc. to ANSI B1.20.2 - 1983

Norm references / Approvals
UL File Nr. E79903

Remark
Photographs are not to scale and do not represent detailed images of the respective products.

Technical Data

Article designation / size:	1 1/2"
Clamping range ØF (mm):	27 - 35
SW (mm):	54
Overall length, C (mm):	59
Thread length, D (mm):	17
Pieces / PU:	1
Material:	Body: nickel-plated brass EMC brush: brass Sealing ring: special elastomer O-ring: special elastomer
Protection rating:	IP 68 - 5 bar
Temperature range:	-30°C to +100°C

PN 0486/01_03.10 ©2012 Lapp Group - Technical changes reserved
Photographs are not to scale and do not represent detailed images of the respective products.

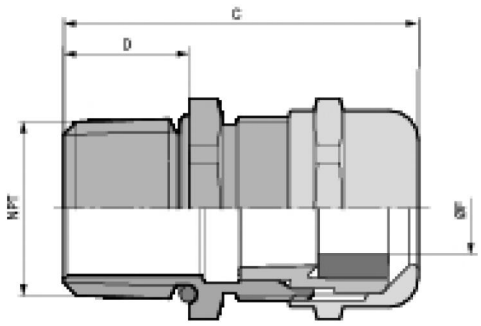

PN 0486/01_03.10 ©2012 Lapp Group - Technical changes reserved
Photographs are not to scale and do not represent detailed images of the respective products.