

# CLIFF

## AIRTIGHT XLR RANGE



The airtight XLR is the latest XLR connector designed and made by Cliff UK. It is an airtight connector, primarily intended for applications such as active speakers, where it is detrimental to have air movement in and out of the enclosure. The movement of the speaker diaphragm can cause air pressure changes. This air can produce noise if leaked in and out of the enclosure via any small holes.

A gasket is supplied to seal the socket flange against the enclosure. The gasket can be fitted on the front or rear of the XLR depending on preferred mounting. 3 mounting types available. Contacts are gold plated. Female versions is available with a latch.

Rated Current: 3 Pin 5A. Nominal, 15A. Max.\*  
Rated Voltage: 250VAC Max.\*

### Part Numbers:


<b>CP30060</b>	AUDIO CONN AT-XLR-M	(Male - Solder bucket)
<b>CP30070</b>	AUDIO CONN AT-XLR-F	(Female - Solder bucket)
<b>CP30080</b>	AUDIO CONN AT-XLR-F LATCHING	(Female - Solder bucket with latch)
<b>CP30061</b>	AUDIO CONN AT-XLR-M PCB	(Male - Vertical PCB)
<b>CP30071</b>	AUDIO CONN AT-XLR-F PCB	(Female - Vertical PCB)
<b>CP30081</b>	AUDIO CONN AT-XLR-F LATCHING PCB	(Female - Vertical PCB with latch)
<b>CP30062</b>	AUDIO CONN AT-XLR-M 90d PCB	(Male - 90° PCB)
<b>CP30072</b>	AUDIO CONN AT-XLR-F 90d PCB	(Female - 90° PCB)
<b>CP30082</b>	AUDIO CONN AT-XLR-F LATCHING 90d PCB	(Female - 90° PCB with latch)

\* For further information, contact [sales@cliffuk.co.uk](mailto:sales@cliffuk.co.uk)


# Product Drawings

## Non Latching Models

### PCB Mounting

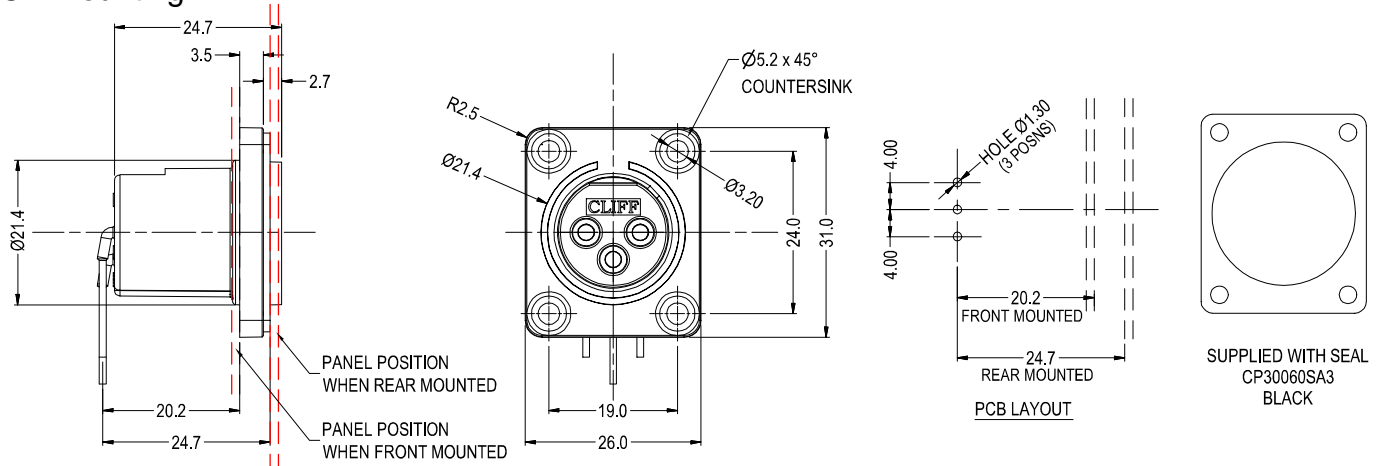

### 90° PCB Mounting

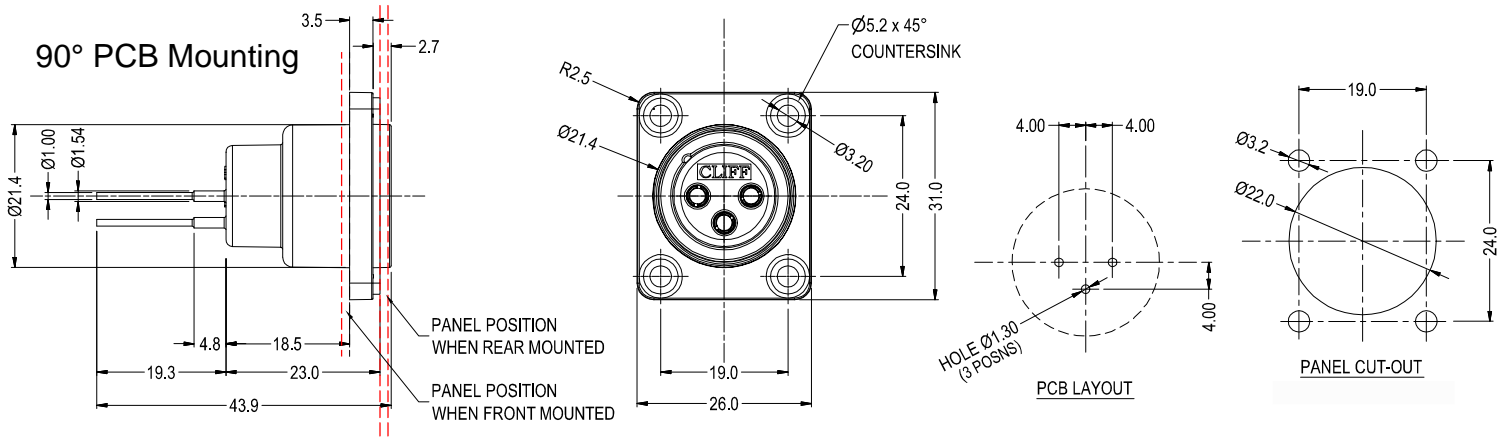

## Latching Models

### Female Latching with solder bucket

