D1RFRD006

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
1		4.5±0.1变更到4.0±0.3	DZJ	06/14/'05
2		图面更新	csx	04/08/'06
3		增加VDE、CE刻字	Yej	02/26/'08
4		更新图面	LJH	04/16/'08
5		增加自动化方针	WLM	09/23/'08
6	10-0329	增加标注尺寸	COCO	09/0/'08
7	14-0107	黄铜变紫铜，料号变更;工频耐压变更为额定冲击电压	HHJ	12/20/'14

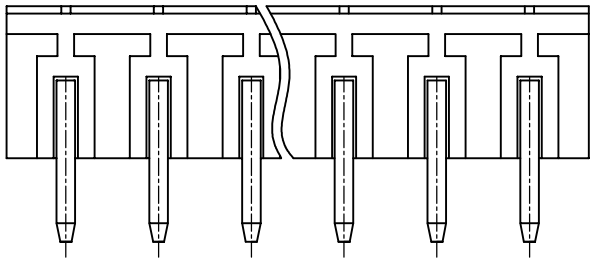

VIEW A



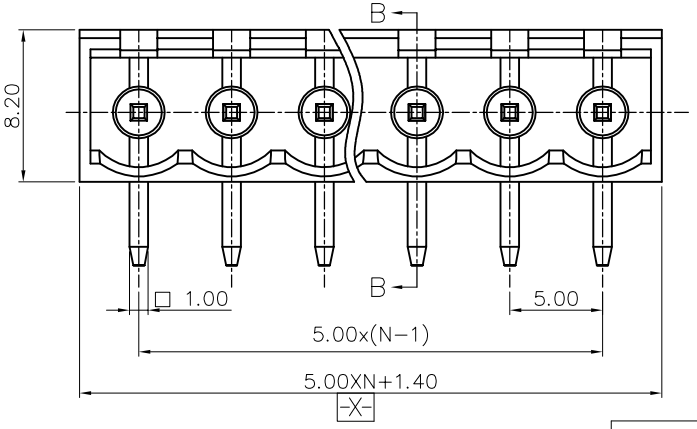

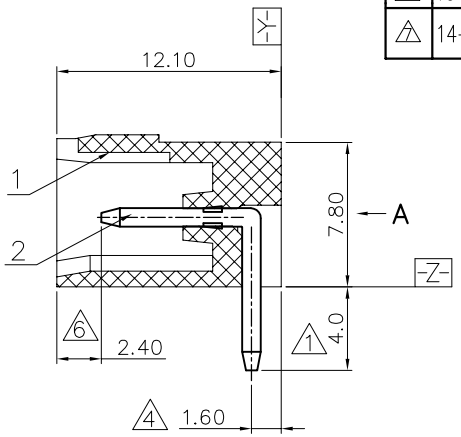

SEC B-B



Pitch range in mm			Naminal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	⌒
								▱
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

NOTES:
1. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5-2009.
2. PITCH: 5.0MM ,POLES: 2-24P
3. RATED VOLTAGE/CURRENT: UL 300V/15A
   VDE 320V/20A
4. OPERATION TEMPERATURES: -40℃~+105℃
5. RATED IMPULSE VOLTAGE: 4.0KV
6. INSULATION RESISTANCE: 5000MΩ/DC1000V
7. UNDIMENSIONED TOLERANCES:

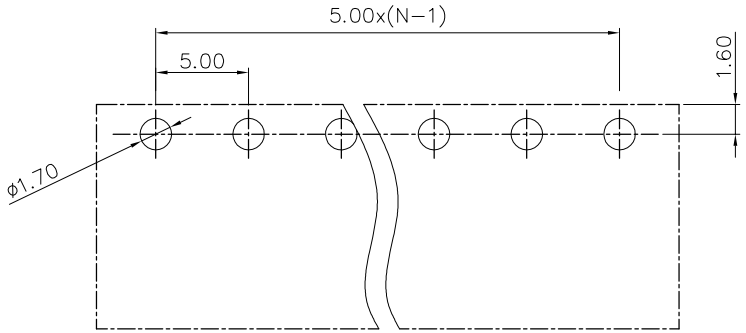

P.C.B LAYOUT

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
5,7	2EDGR(A)-Pin header Automatic assembly	1008B00340(H)	XX	COPPER	Sn Plated
7	2EDGR(A)-Pin header Manual assembly	1008B00330(H)	XX	COPPER	Sn Plated
1	2EDGRC-5.0 Housing	1019A0YXXA(H)	1	PA66	UL94V-0

DETACHED LISTS

MM (INCH)

TOLERANCES EXCEPT AS NOTED

.X ± .XX ± .XXX ±

.X° ± .XX° ± .XXX° ±

ANGLES ± 1°

THIRD ANGLE PROJECTION

MATERIAL:

FINISH:

PART NO.:

APPD:

CHKD:

DRFT: HW 05/05/05"

宁波高正电子有限公司
DEGSON® DEGSON ELECTRONICS CO., LTD

NAME: 2EDGRC-5.0-XXP-1Y-00A(H)

TITLE: ASSEMBLY DRAWING

REV: T7

DRAWING NO.: 2EDGRC-5.0-E02

DO NOT SCALE DRAWING | SCALE N/A | SHEET 1/1