

The Neostart 420 is a powerful 420 Amp 12-24V starter/charger capable of starting/charging cars, vans and commercial vehicles even with deeply discharged batteries.

CHARGER FUNCTION

The Neostart 420 charges 12V and 24V lead acid batteries from **20Ah to 1000Ah**.

It is a traditional charger with a maximum charging current of 70A (45A average).

STARTER FUNCTION


The Neostart 420 can start vehicles with 12V or 24V lead acid batteries from **35Ah to 160Ah**.

A short pre-charge may be necessary to start very deeply discharged batteries.

- The NeoStart 420 is protected against short circuits, polarity reversal and mains overvoltage.
- On board storage for cables and clamps
- Integrated wheels for portability
- Cables Ø 10 mm², (length: red - 2m, black - 1.8m)
- Externally visible and easily accessible fuse
- Large ammeter



EASY TO USE CONTROL PANEL

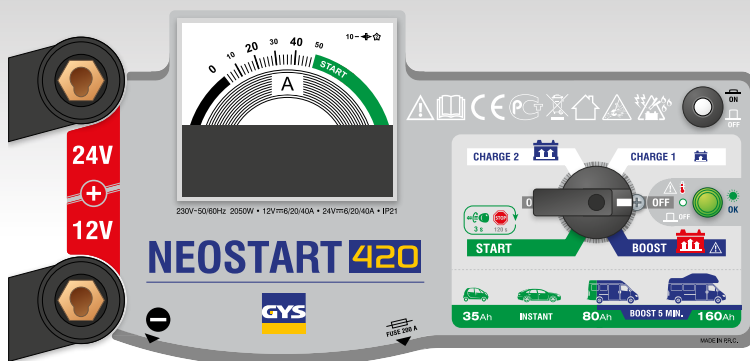

CE - EN 60335-2-29

50/60hz	I ₁	2050W	12-24V	MIN. Ah	MAX. Ah	Reg	EFFICACE / RMS	MOYEN / AVERAGE	POS. MANUAL	START		Fuse	IP	cm	kg
										A 1V/C	A 0V/C				
230V	16A	2050W	12-24V	20	>1000	3	70A	45A	•	300A	420A	200A	IP 21	47x32x27	20,5