

# Quick Installation Guide


802.11ac Wireless Dual Band  
PCI Express Adapter

7106505052 REV2.0.0



For more information, please visit our website: <http://www.tp-link.com>

## 1 Connect to a Computer

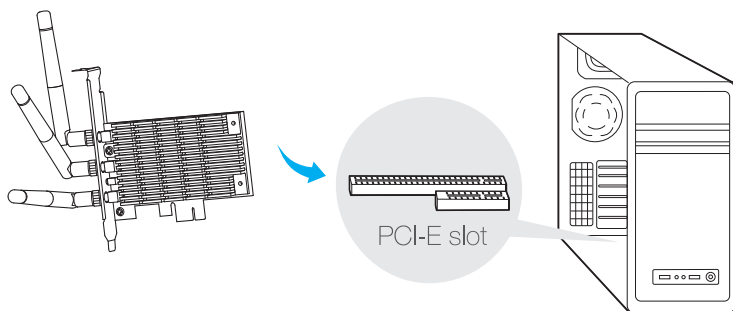

Insert the adapter into your computer by following these steps:


1. Turn off your computer, unplug the power cord and other connected peripheral devices to your computer.
2. Remove the case panel. Locate an available PCI-E slot and remove its slot cover.
3. Carefully insert the adapter into the PCI-E slot and secure it with the retaining screw.
4. Replace the case panel.
5. Reconnect the power cord and turn on your computer.

Note: In Windows XP, a Found New Hardware Wizard window will appear when the adapter is detected. Please click **Cancel**.

## 2 Install Driver and Utility


You can also download the driver and utility at [www.tp-link.com/en/](http://www.tp-link.com/en/)

**A:** Insert the CD and run the Autorun.exe from the pop-up Autoplay window.



Note: In some operating systems, the CD screen will pop up automatically. Otherwise, run the CD manually.

**B:** Select the model and click **Install Driver and Utility**, then follow the InstallShield Wizard to complete the installation. (Here we take Archer T8E as an example.)

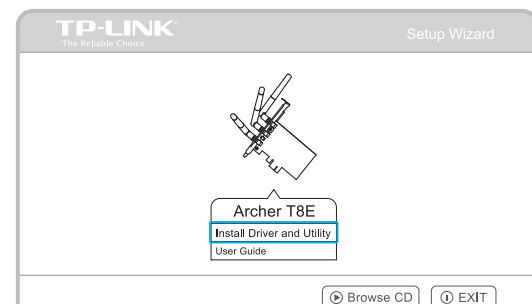


## 3 Join a Wireless Network

For Windows 8.1, TP-LINK Utility is not supported, please use the Windows built-in Wireless Utility to join a network.

### Option 1: Via TP-LINK Utility

Select your preferred wireless network from the pop-up utility window and click **Connect**. The symbol  indicates a successful connection.

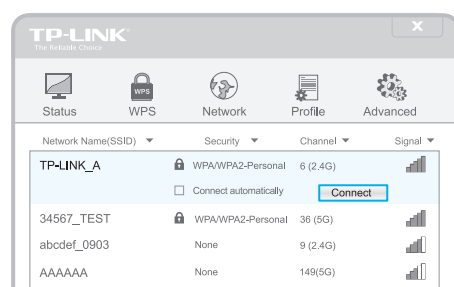

### Option 2: Via Windows Wireless Utility

With the TP-LINK Utility closed, you can use the Windows built-in Wireless Utility to join a wireless network.

