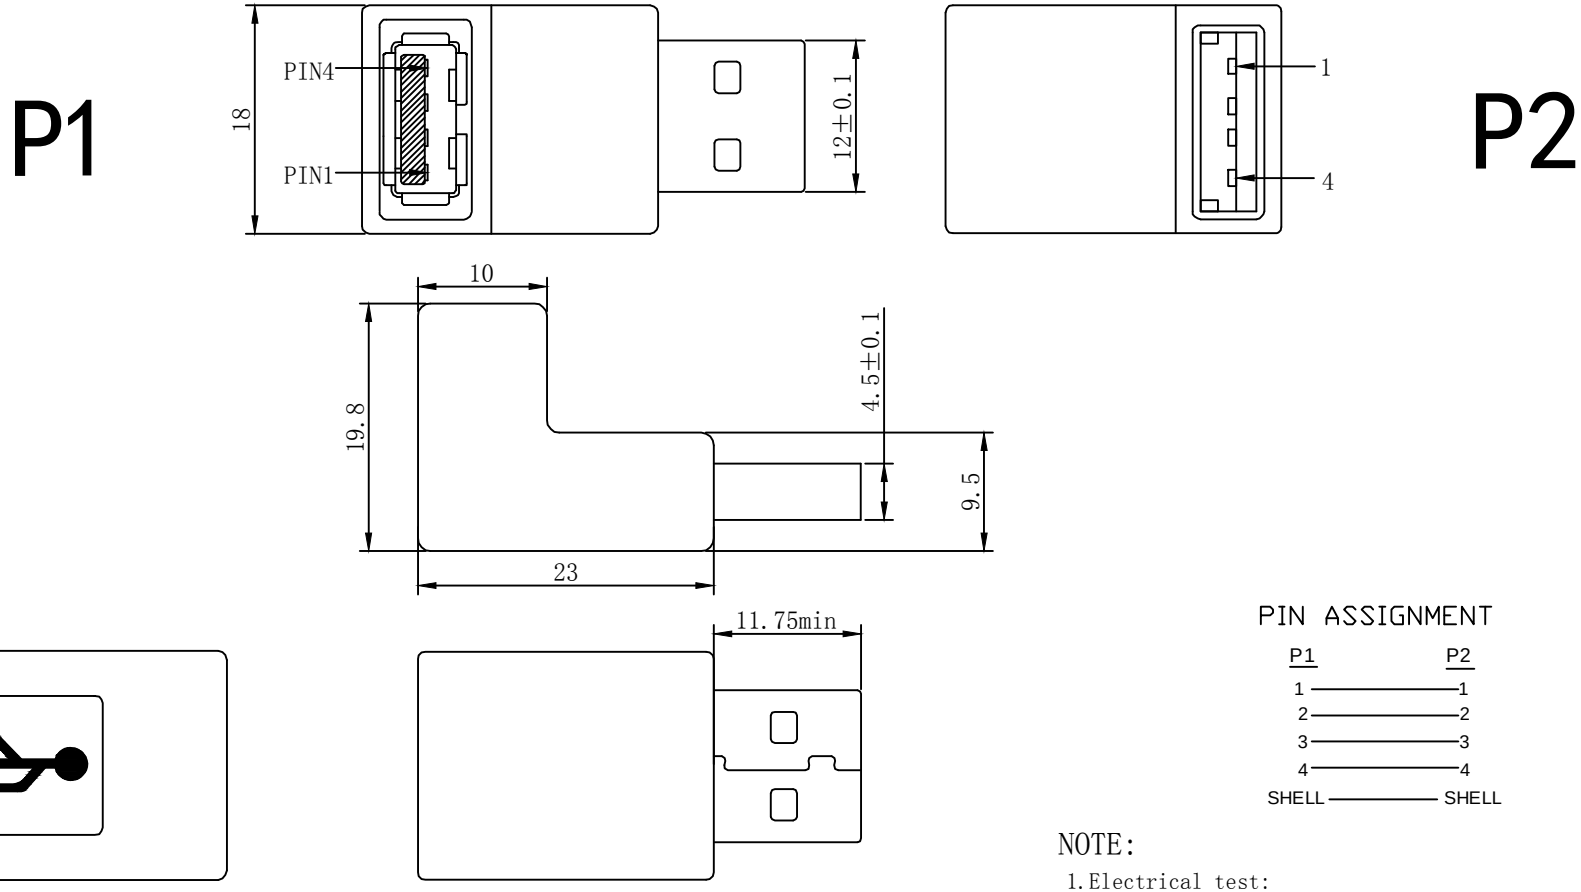

PIN ASSIGNMENT

P1	P2
1	1
2	2
3	3
4	4
SHELL	SHELL

NOTE:

1. Electrical test:
   (1). 100% open short & miss wire test;
   (2). Insulation resistance:DC 300V 10MΩ Min;
   (3). Contactor resistance:3Ω Max;
2. Operation temperature:-10℃ ~+60℃
   Storage temperature:-20℃ ~ +75℃
   Operation humidity:10%~85%
   Storage humidity:10%~85%
   weight of unit (w/o packing):10.5g
3. ROHS2.0 and REACH compliant
4. PACKING:1PCS/RENKFORCE

MATERIAL LIST:

NO.			QT'Y	REMARK
④	INNER MOLD	PE	1	
③	OVER MOLD	45P PVC BLACK	1	
②	CONNECTOR	USB AF PIN,White PBT insulation The Pin is Gold plated 1u", the Shell for Nickel plating	1	
①	CONNECTOR	USB AM 4PIN,White PBT insulation The Pin is Gold plated 1u", the Shell for Nickel plating	1	

					CUSTOM	CEI Conrad Electronic International(HK) Ltd	ITEM NO.	1377147
					PRODUCT NAME	USB2.0 AM-AF 90° ANGLED ADAPTER	UNO ITEM NO.	750024 MM
		NEW		A	DRAWNBY	CHECKBY	APPOBY	DATE
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.	FERGUS			2015-12-03