REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 09/25/06'		LJC 09/25/06'
B	PLATING CHANGE	JLZ 07/07/15'		



SPECIAL LATCH



STANDARD LATCH

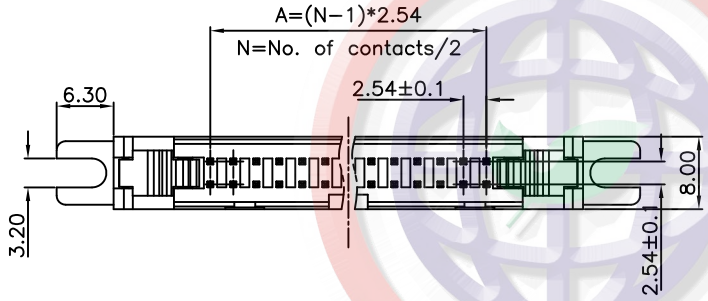

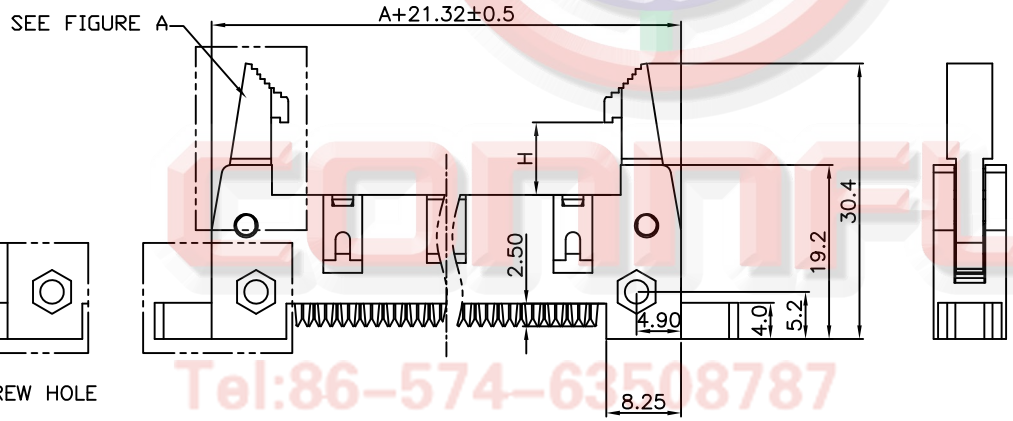

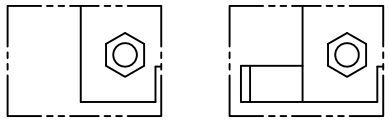

W/O SCREW HOLE

W/ SCREW HOLE

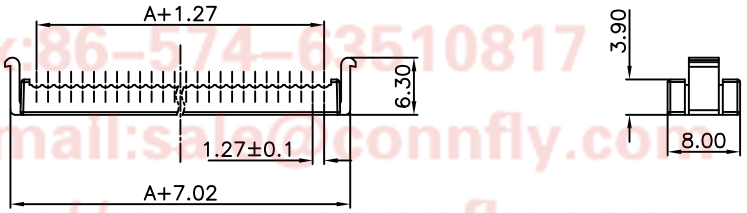

COVER

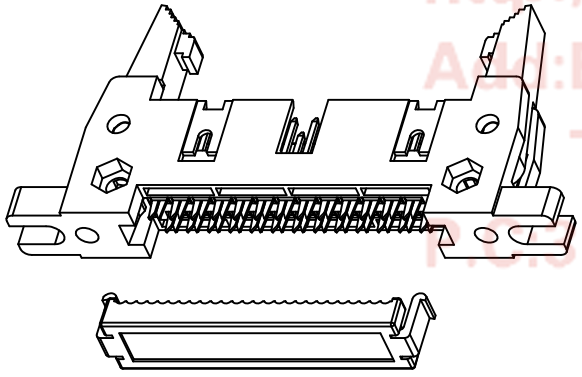

NOTES:

1. MATERIAL
   - 1.1 INSULATOR:THERMOPLASTIC(UL 94V−0).
   - 1.2 CONTACT: COPPER ALLOY.
2. SPECIFICATION
   - 2.1 STORAGE TEMPERATURE:−40°C~+105°C.
   - 2.2 CONTACT RESISTANCE:20mΩ max.(initial).
   - 2.3 INSULATION RESISTANCE:1000MΩ min.
   - 2.4 DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.
3. PART NUMBER: DS1012
4. PRODUCT NUMBER CODE:

DS1012− X X X X X X X

- LOCK DIM.H
  8: 8.00mm (standard)
  4: 4.60mm (special)
- HOUSING COLOR
  A: GRAY
  B: BLACK
- CONTACT PLATING
  2: GOLD + NICKEL Ⓑ
- STRAIN RELIEF
  N: W/O
- SCREW HOLE
  M: W/
  N: W/O
- EJECTOR TYPE
  L: Long
- No.OF CONTACTS
  10 14 16 24 26
  30 40 50 60 64
- SERIES No.
  DS1012

connfly
Tel:86-574-63508787
Fax:86-574-63510817
E-mail:sale@connfly.com
http://www.connfly.com
Add:East Industry Zone KuangYan
Town Cixi Ningbo China
P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C−DS1012−XXXXXXX−B		

PROJECTION		TITLE	IDC SHROUDED HEADER MATES WITH PITCH 1.27mm FLAT CABLE
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1012 SERIES

晨翔电子有限公司
CONNFLY ELECTRONIC CO. LTD