

QUESTIONS, PROBLEMS, OR MISSING PARTS?

If any parts are missing, damaged, or if you have any questions or need additional instructions, DO NOT RETURN THIS PRODUCT TO THE RETAILER, visit us at www.2helpU.com to complete the replacement parts submission form

IMPORTANT SAFETY INSTRUCTIONS

1. Failure to read and follow **ALL** instructions on this product and herein this manual may result in damage, injuries, and/or death.
2. Visually inspect hand truck upon receipt and before each use. Do **NOT** use the hand truck if any part and/or fastener is missing or damaged.
3. Do **NOT** exceed maximum load capacity of 441 lbs (200kg) / in cart mode.
4. Do **NOT** inflate tires above 30 PSI (2.07 BAR).
5. Do **NOT** transport passengers.
6. This hand truck is **NOT** a toy and should **NOT** be used by children.
7. Load must be protected, secured to hand truck, and load evenly distributed to prevent damage to load and property and/or falling.
8. Locks must be fully engaged before use.
9. Be careful and avoid pinch points when using the hand truck.


STANLEY® and the STANLEY® Logo are trademarks of Stanley Black & Decker, Inc.

Manufactured and distributed by:
SHI BV.
Laagveld 10, 5721 VV Asten,
The Netherlands - www.shi.nl


© Copyright 2026.
Made in China
For full warranty details please visit
www.2hlpU.com

STANLEY®

MODEL #: SXWT-HT513

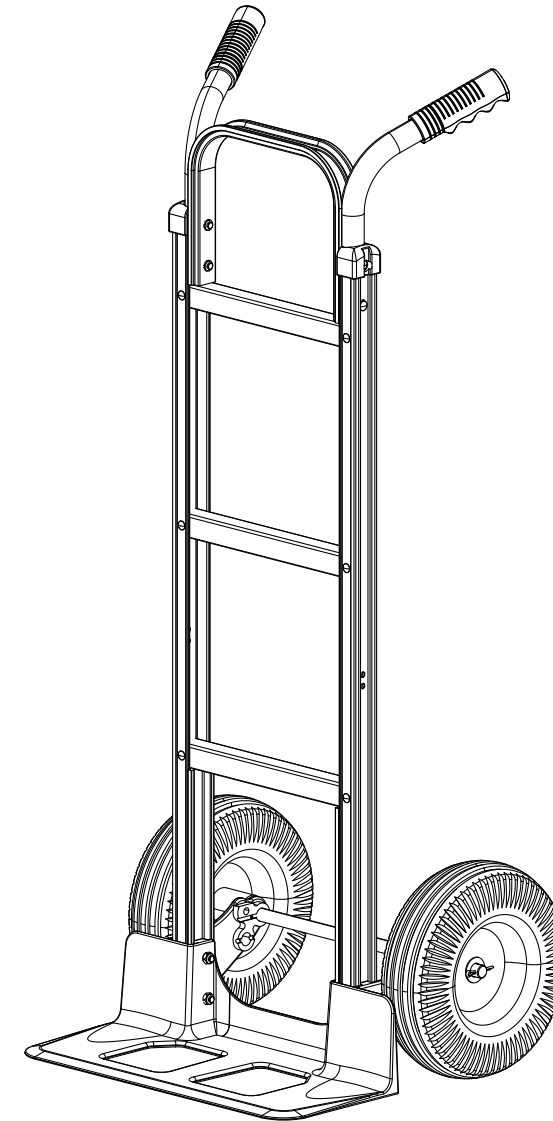


ASSEMBLY TIPS

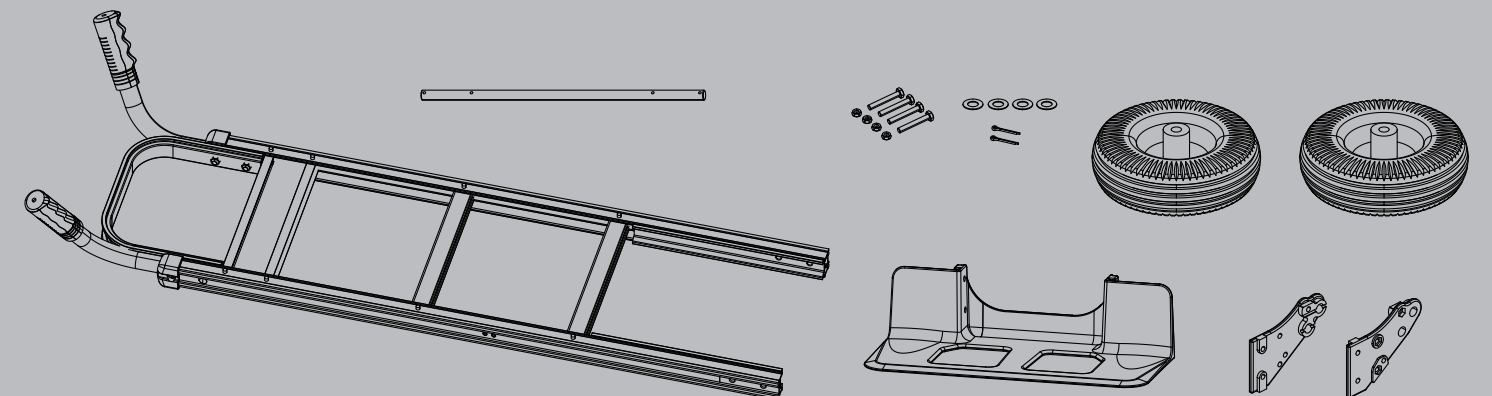


HARDWARE

STEP 2

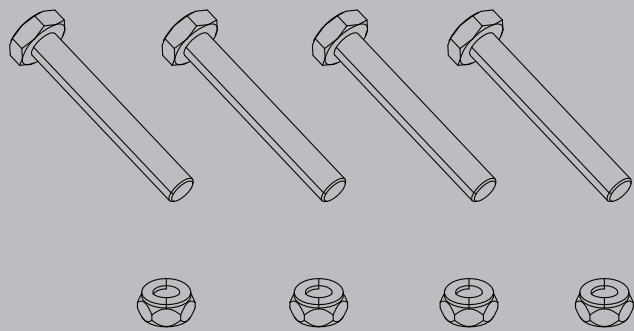

STEP 3





TOOLS REQUIRED




ASSEMBLY INSTRUCTIONS


1

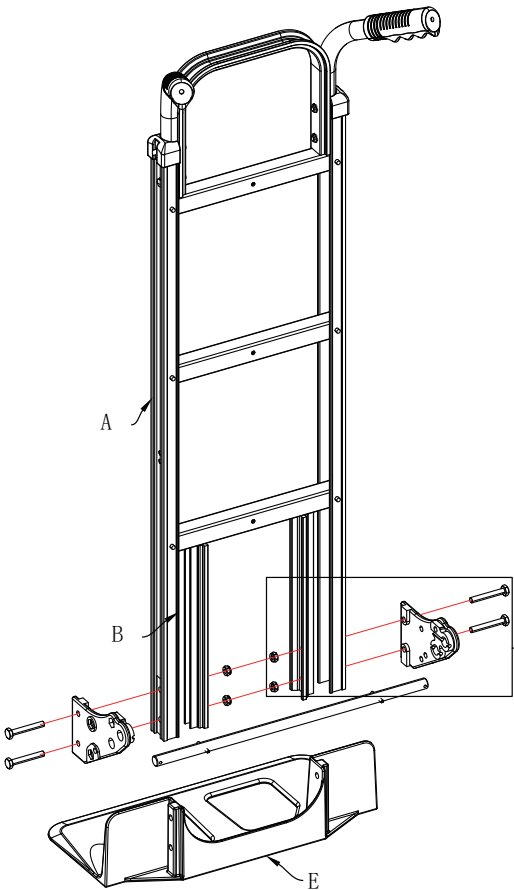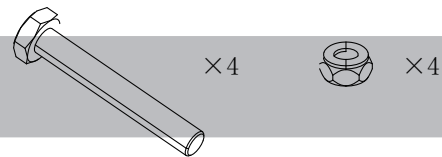

Step 1: Insert D into the installation hole of C.
Step 2: Install B and E onto A. Insert F and G connectors at both ends and tighten them with a 13mm open-end wrench.

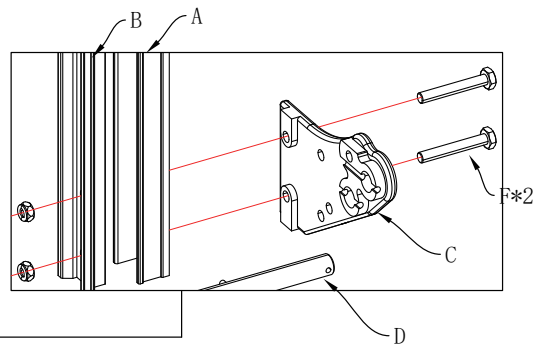


2

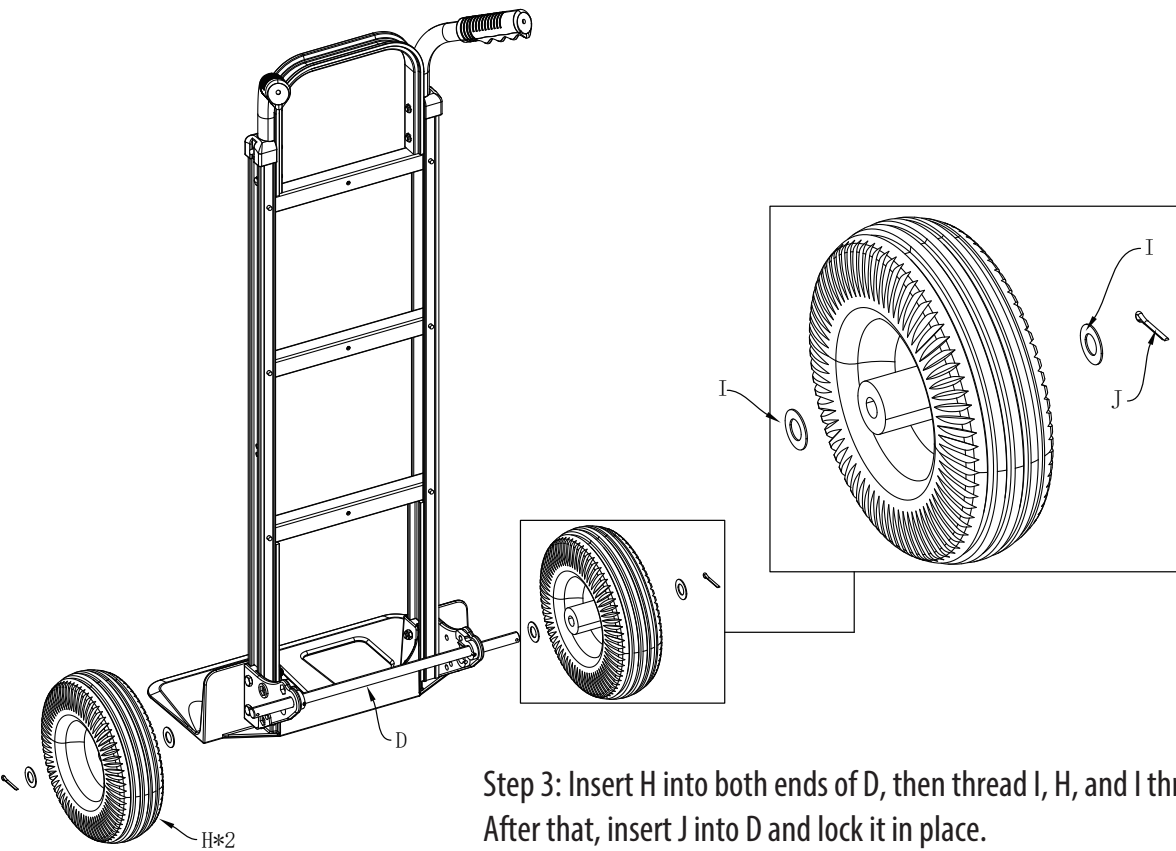

Step 3: Insert H into both ends of D, then thread I, H, and I through them in sequence. After that, insert J into D and lock it in place.

3

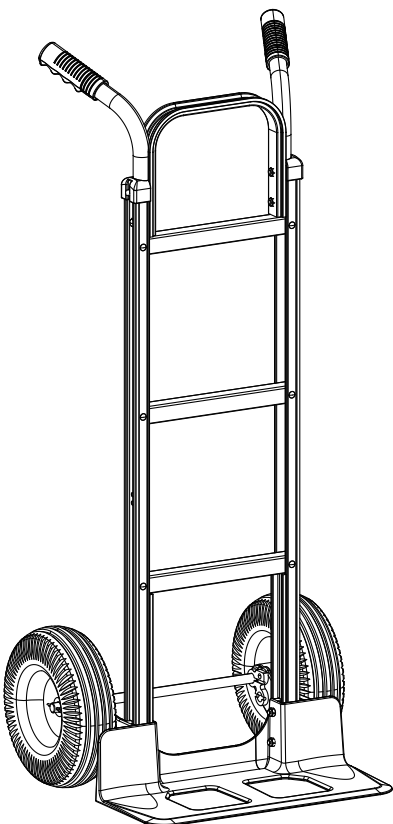

Installation is finished