


## 5A to 16A low-profile power relay

### Features

- 5mm lower in height than HR-CR3 series
- Wide contact arrangements  
1 Form A to 2 Form C
- 16A contact capacity
- Sealed construction standard

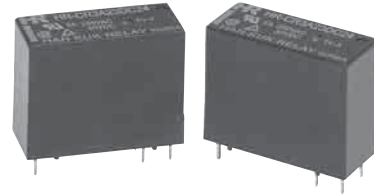

### Applications

- Home appliance, Industrial control


### Approvals



### 1 Pole type


#### Dimensions (mm)

To convert into inches, multiply by 0.03937

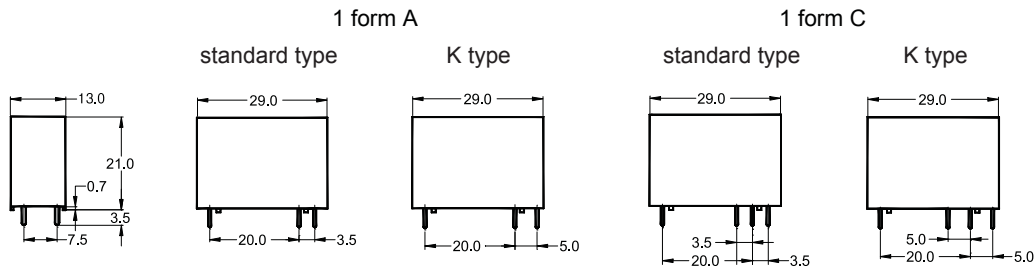

### PC Board Layout

Copper-side view

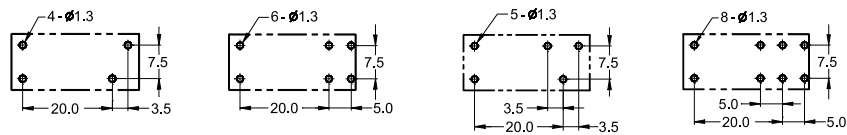

### Schematic


Copper-side view



## 2 Pole type


### Dimensions (mm)

To convert into inches, multiply by 0.03937

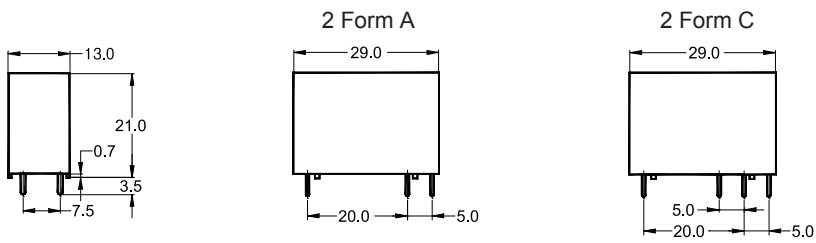

### PC Board Layout

Copper-side view

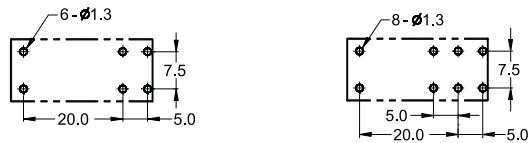


### Schematic




Copper-side view





### Socket



KPX14



KPX24



## Contact data

Arrangement	1 Form A (SPST) to 2 Form C (DPDT)				
Contact material	Ag Alloy				
Initial contact resistance	100mΩ max.				
Type	2 Pole type 2 Form A, C	1 Pole typ			
		Standard 1 Form A, C	K type		
			1 Form C	1 Form A	
Rated load, resistive	5A 30VDC	10A 30VDC	10A 30VDC	16A 30VDC	
	5A 250VAC	10A 250VAC	10A 250VAC	16A 250VAC	
	TV-5	TV-5	TV-8		
Maximum carry current	5A	10A	16A	16A	
Maximum switching capacity	with DC voltage:	150W	300W	300W	480W
	with AC voltage:	1,250VA	2,500VA	2,500VA	3,840VA
Maximum switching voltage	250VAC				
Minimum switching rating <sup>1)</sup>	100mA 5VDC				

<sup>1)</sup> Min. Switching Load mentioned above are reference values. Therefore it is recommended to perform the confirmation test with the actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

## Coil data

Nominal voltage	5VDC to 48VDC
Nominal power consumption <sup>2)</sup>	530mW, 720mW
Operate voltage <sup>3)</sup>	80% of nominal voltage
Release voltage <sup>4)</sup>	10% of nominal voltage



<sup>2), 3), 4)</sup> The values depend on coil voltage, see Part selection chart

## General data

Operate time	15ms max. at nominal voltage	
Release time	8ms max. at nominal voltage	
Initial insulation resistance	1,000 MΩ min. (500VDC)	
Dielectric strength	Between open contacts:	1,000VAC <sub>rms</sub> for 1 minute
	Between contacts and coil:	5,000VAC <sub>rms</sub> for 1 minute
Surge strength	Between contacts and coil:	10,000V
Expected life	Mechanical:	More than 10,000,000 operations
	Electrical:	More than 100,000 operations at rated load
Vibration resistance	Functional:	10 ~ 55Hz dual amplitude: 1.5mm
	Destructive:	10 ~ 55Hz dual amplitude: 1.5mm
Shock resistance	Functional:	10G min.
	Destructive:	100G min.
Ambient temperature	- 40°C to + 70°C (with no icing)	
Humidity	45% to 85% RH	
Weight	13g approx.	

Note: The above figures are initial values

## Part number description

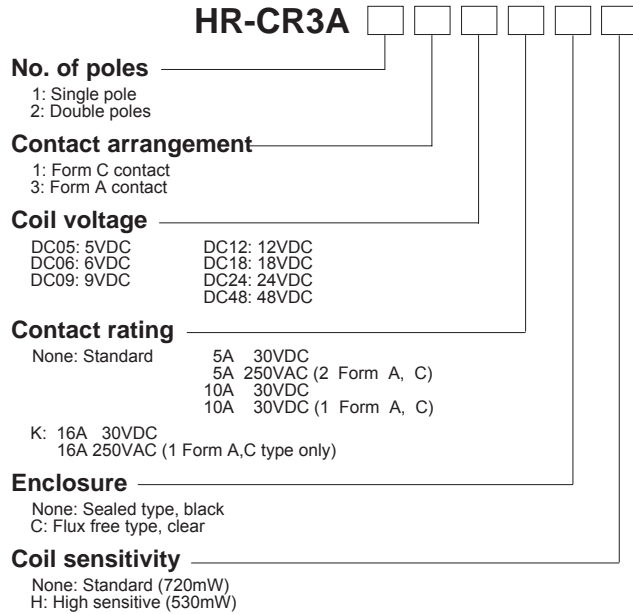

Part number description is provided for reference, part number cannot be arbitrarily composed. Refer to the part numbers shown in the table below. Special designs to customer specifications are possible; please contact HR.

## Part selection

□ Fill in the codes to the part number by selecting them from the part number description

Part number	Nominal voltage (VDC)	Coil resistance ( $\Omega \pm 10\%$ )	Nominal current (mA)	Must operate voltage (VDC)	Must release voltage (VDC)	Max voltage (VDC)	Nominal power (mW)
<b>Sensitive coil 1 Form C, 1 Form A, 2 Form C, 2 Form A</b>							
HR-CR3A□□DC05□□	5	35	144	4.0	0.5	6.5	720
HR-CR3A□□DC06□□	6	50	120	4.8	0.6	7.8	
HR-CR3A□□DC09□□	9	112	80	7.2	0.9	11.7	
HR-CR3A□□DC12□□	12	200	60	9.6	1.2	15.6	
HR-CR3A□□DC18□□	18	450	40	14.4	1.8	23.4	
HR-CR3A□□DC24□□	24	800	30	19.2	2.4	31.2	
HR-CR3A□□DC48□□	48	3,200	15	38.4	4.8	62.4	
<b>Sensitive coil 1 Form C, 1 Form A, 2 Form C, 2 Form A</b>							
HR-CR3A□□DC05□□H	5	47	106	4.0	0.5	6.5	530
HR-CR3A□□DC06□□H	6	68	88	4.8	0.6	7.8	
HR-CR3A□□DC09□□H	9	153	59	7.2	0.9	11.7	
HR-CR3A□□DC12□□H	12	273	44	9.6	1.2	15.6	
HR-CR3A□□DC18□□H	18	620	29	14.4	1.8	23.4	
HR-CR3A□□DC24□□H	24	1,085	22.1	19.2	2.4	31.2	
HR-CR3A□□DC48□□H	48	4,350	11.0	38.4	4.8	62.4	

Note: All values in the chart are measured at 23°C