
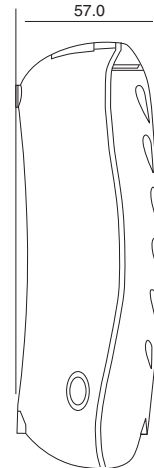


GP Batteries

Product Specification

Model No.: GPPB19

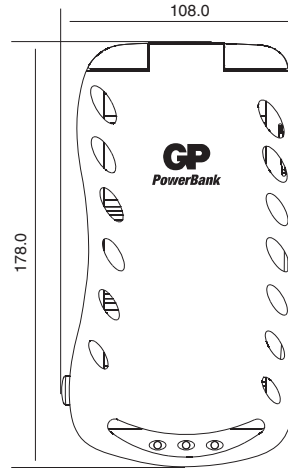

Unit : mm

Product Name	:	GP PowerBank Universal																																																							
Description	:	Universal battery charger with external adaptor																																																							
Input Voltage	:	100-240V AC 50/60Hz																																																							
Output Voltage	:	D/C/AA/AAA 2 x 2.8V DC 9V 2 x 9V DC																																																							
Application	:	For charging 2 or 4 pcs AA, AAA, C or D size battery (2 batteries per one channel), and 1 to 2 pcs 9V size																																																							
Charging Current	:	<table border="1"> <thead> <tr> <th>D</th> <th>C</th> <th>AA</th> <th>AAA</th> <th>9V</th> </tr> </thead> <tbody> <tr> <td>560mA</td> <td>440mA</td> <td>260mA</td> <td>120mA</td> <td>14mA</td> </tr> </tbody> </table>	D	C	AA	AAA	9V	560mA	440mA	260mA	120mA	14mA																																													
D	C	AA	AAA	9V																																																					
560mA	440mA	260mA	120mA	14mA																																																					
Charging Time	:	<table border="1"> <thead> <tr> <th>Size</th> <th>Battery Capacity</th> <th>Charging Time(hours)</th> <th>Size</th> <th>Battery Capacity</th> <th>Charging Time(hours)</th> </tr> </thead> <tbody> <tr> <td rowspan="5">AA</td> <td>1300 mAh</td> <td>~ 5</td> <td rowspan="5">D</td> <td>2200 mAh</td> <td>~ 5</td> </tr> <tr> <td>1600 mAh</td> <td>~ 8</td> <td rowspan="4">4500 mAh</td> <td>~ 10</td> </tr> <tr> <td>1800 mAh</td> <td>~ 9</td> <td rowspan="3">7000 mAh</td> <td>~ 16</td> </tr> <tr> <td>2100 series</td> <td>~ 10</td> <td rowspan="2">9000 mAh</td> <td>~ 21</td> </tr> <tr> <td>2300 series</td> <td>~ 11</td> <td rowspan="5">C</td> <td>2200 mAh</td> <td>~ 5</td> </tr> <tr> <td rowspan="5">AAA</td> <td>600 mAh</td> <td>~ 5</td> <td rowspan="4">3500 mAh</td> <td>~ 10</td> </tr> <tr> <td>650 mAh</td> <td>~ 7</td> <td rowspan="3">9V</td> <td>170 mAh</td> <td>~ 16</td> </tr> <tr> <td>700 mAh</td> <td>~ 7.5</td> <td></td> <td></td> </tr> <tr> <td>800 mAh</td> <td>~ 8.5</td> <td></td> <td></td> </tr> <tr> <td>850 mAh</td> <td>~ 9</td> <td></td> <td></td> </tr> <tr> <td>1000 mAh</td> <td>~ 10.5</td> <td></td> <td></td> </tr> </tbody> </table>	Size	Battery Capacity	Charging Time(hours)	Size	Battery Capacity	Charging Time(hours)	AA	1300 mAh	~ 5	D	2200 mAh	~ 5	1600 mAh	~ 8	4500 mAh	~ 10	1800 mAh	~ 9	7000 mAh	~ 16	2100 series	~ 10	9000 mAh	~ 21	2300 series	~ 11	C	2200 mAh	~ 5	AAA	600 mAh	~ 5	3500 mAh	~ 10	650 mAh	~ 7	9V	170 mAh	~ 16	700 mAh	~ 7.5			800 mAh	~ 8.5			850 mAh	~ 9			1000 mAh	~ 10.5		
Size	Battery Capacity	Charging Time(hours)	Size	Battery Capacity	Charging Time(hours)																																																				
AA	1300 mAh	~ 5	D	2200 mAh	~ 5																																																				
	1600 mAh	~ 8		4500 mAh	~ 10																																																				
	1800 mAh	~ 9			7000 mAh	~ 16																																																			
	2100 series	~ 10				9000 mAh	~ 21																																																		
	2300 series	~ 11					C	2200 mAh	~ 5																																																
AAA	600 mAh	~ 5	3500 mAh	~ 10																																																					
	650 mAh	~ 7		9V	170 mAh	~ 16																																																			
	700 mAh	~ 7.5																																																							
	800 mAh	~ 8.5																																																							
	850 mAh	~ 9																																																							
1000 mAh	~ 10.5																																																								
MTBF	:	30000 hours																																																							
Operating Temperature	:	0°C to 45°C																																																							
Storage Temperature	:	-20°C to 60°C																																																							
Charge Indicator	:	2 Green LED for 2 channels; 1 Green LED for 9V																																																							
Dimensions	:	178 (L) X 108 (W) X 57 (T)mm																																																							
Approval	:	Charger - CE, FCC Adaptor - CE, GS, c-UL																																																							
Warranty Period	:	12 months from ex-factory date.																																																							