

# Safety relays - PSR-SPP-24DC/MXF1/4X1/2X2/B - 2902726

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Multifunctional safety relay for emergency stop and safety doors up to SIL 3, Cat. 4, PL e, automatically or manually monitored activation, 4 N/O contacts, 3 safety functions, 2 shutdown levels, plug-in spring-cage terminal block

## Your advantages

- Up to Cat.4/PL e according to EN ISO 13849-1, SILCL 3 according to EN 62061, SIL 3 according to IEC 61508
- 3 safety functions in one device
- Low housing width of only 22.5mm
- No software configuration required
- Also available with push-in connection



## Key commercial data

<b>package_quantity</b>	1
<b>GTIN</b>	4046356673013

## Technical data

### Note

<b>Utilization restriction</b>	EMC: class A product, see manufacturer's declaration in the download area
--------------------------------	---

### Dimensions

<b>Width</b>	22.5 mm
<b>Height</b>	117.4 mm
<b>Depth</b>	114.5 mm

### Ambient conditions

<b>Ambient temperature (operation)</b>	-20 °C ... 45 °C (see derating curve)
<b>Ambient temperature (storage/transport)</b>	-25 °C ... 85 °C
<b>Max. permissible relative humidity (operation)</b>	75 % (on average, 85% infrequently, non-condensing)
<b>Max. permissible humidity (storage/transport)</b>	75 % (on average, 85% infrequently, non-condensing)
<b>Maximum altitude</b>	≤ 2000 m (Above sea level)

### Input data

<b>Nominal input voltage U<sub>N</sub></b>	24 V DC
--	---------

# Safety relays - PSR-SPP-24DC/MXF1/4X1/2X2/B - 2902726

## Technical data

### Input data

Input voltage range in reference to U <sub>N</sub>	0.85 ... 1.1
Typical input current at U <sub>N</sub>	125 mA (with actuated relays)
Typical input current at U <sub>N</sub>	55 mA (Two-channel 24 V/0 V + max. 200 mA control (message outputs 32/62) with non-actuated relays)
Current consumption	typ. 5 mA (I <sub>max</sub> /I <sub>x</sub> inputs)
Current consumption	20 mA (in electric torque)
Voltage at input/start and feedback circuit	24 V -15 %; +10 % (first channel: 24 V; second channel: 0 V)
Typical response time	175 ms (monitored/manual start)
Typical response time	250 ms (automatic start)
Typ. starting time with U <sub>s</sub>	250 ms (when controlled via A1)
Typical release time	25 ms (when controlled via S11/I1,I3,I5 and S21/I2,I4,I6)
Typical release time	20 ms (when controlled via A1)
Concurrence input 1/2	∞
Recovery time	1 s (Availability time after activation of sensor circuit: 100ms)
Status display	5 green LEDs
Maximum switching frequency	0.5 Hz
Max. permissible overall conductor resistance	100 Ω
Filter time	max. 1.5 ms (Test pulse duration; for all equivalent inputs)
Filter time	min. 7.5 ms (Test pulse rate; for all equivalent inputs)

### Output data

Contact type	4 enabling current paths
Contact type	2 semiconductor alarm outputs
Contact material	AgCuNi, +0,2 -0,4 μm Au
Minimum switching voltage	10 V AC/DC
Maximum switching voltage	250 V AC/DC
Limiting continuous current	6 A (N/O contact)
Limiting continuous current	max. 100 mA (Alarm output (24 V DC))
Inrush current, minimum	10 mA
Maximum inrush current	6 A
Sq. Total current	$72 A^2 (I_{TH}^2 = I_1^2 + I_2^2 + I_3^2 + I_4^2)$
Interrupting rating (ohmic load) max.	1500 VA (250 V AC, τ = 0 ms)
Interrupting rating (ohmic load) max.	66 W (220 V DC, τ = 0 ms)
Interrupting rating (ohmic load) max.	66 W (110 V DC, τ = 0 ms)
Interrupting rating (ohmic load) max.	100 W (48 V DC, τ = 0 ms)
Interrupting rating (ohmic load) max.	144 W (24 V DC, τ = 0 ms)
Maximum interrupting rating (inductive load)	48 W (24 V DC, τ = 40 ms)
Maximum interrupting rating (inductive load)	43 W (48 V DC, τ = 40 ms)
Switching capacity min.	0.1 W
Output fuse	6 A gL/gG NEOZED (N/O contact)
Output fuse	4 A gL/gG NEOZED (for low-demand applications)

# Safety relays - PSR-SPP-24DC/MXF1/4X1/2X2/B - 2902726

## Technical data

### General

<b>Relay type</b>	Electromechanical relay with forcibly guided contacts in accordance with EN 50205
<b>Mechanical service life</b>	10 x 10 <sup>6</sup> cycles
<b>Nominal operating mode</b>	100% operating factor
<b>Net weight</b>	26.1 g
<b>Mounting type</b>	DIN rail mounting
<b>Assembly instructions</b>	See derating curve
<b>Mounting position</b>	vertical or horizontal
<b>Degree of protection</b>	IP20
<b>Min. degree of protection of inst. location</b>	IP54
<b>Control</b>	one and two channel
<b>Housing color</b>	yellow

### Connection data

<b>Connection method</b>	Spring-cage connection
<b>pluggable</b>	Yes
<b>Conductor cross section solid min.</b>	0.2 mm <sup>2</sup>
<b>Conductor cross section solid max.</b>	1.5 mm <sup>2</sup>
<b>Conductor cross section flexible min.</b>	0.2 mm <sup>2</sup>
<b>Conductor cross section flexible max.</b>	1.5 mm <sup>2</sup>
<b>Conductor cross section AWG min.</b>	24
<b>Conductor cross section AWG max.</b>	16
<b>Stripping length</b>	8 mm

### Safety-related characteristic data

<b>Stop category</b>	0
<b>Safety Integrity Level (SIL)</b>	3
<b>Safety Integrity Level (SIL)</b>	3
<b>Designation</b>	EN ISO 13849
<b>Performance level (PL)</b>	e (5 A DC13; 3 A AC15; 8760 cycles/year)
<b>Category</b>	4
<b>Safety Integrity Level Claim Limit (SIL CL)</b>	3
<b>Designation</b>	EN 50156
<b>Safety Integrity Level (SIL)</b>	3

### Standards and Regulations

<b>Designation</b>	Air clearances and creepage distances between the power circuits
<b>Standards/regulations</b>	DIN EN 50178/VDE 0160
<b>Rated insulation voltage</b>	250 V AC
<b>Rated surge voltage/insulation</b>	4 kV/basic isolation (safe isolation, reinforced insulation and 6 kV between input circuit, enabling current paths and safety circuit 1 (13/14, 23/24) and safety circuit 2 (43/44, 53/54).)
<b>Degree of pollution</b>	2
<b>Overvoltage category</b>	III

# Safety relays - PSR-SPP-24DC/MXF1/4X1/2X2/B - 2902726

## Technical data

### Environmental Product Compliance

<b>China RoHS</b>	Environmentally friendly use period: unlimited = EFUP-e
<b>China RoHS</b>	No hazardous substances above threshold values

## Classifications

### eCl@ss

<b>eCl@ss 4.0</b>	27371102
<b>eCl@ss 4.1</b>	27371102
<b>eCl@ss 5.0</b>	27371901
<b>eCl@ss 5.1</b>	27371901
<b>eCl@ss 6.0</b>	27371819
<b>eCl@ss 7.0</b>	27371819
<b>eCl@ss 8.0</b>	27371819
<b>eCl@ss 9.0</b>	27371819

### ETIM

<b>ETIM 3.0</b>	EC001449
<b>ETIM 4.0</b>	EC001449
<b>ETIM 5.0</b>	EC001449
<b>ETIM 6.0</b>	EC001449


### UNSPSC


<b>UNSPSC 6.01</b>	30211901
<b>UNSPSC 7.0901</b>	39121501
<b>UNSPSC 11</b>	39121501
<b>UNSPSC 12.01</b>	39121501
<b>UNSPSC 13.2</b>	39121501


## Approvals


Functional Safety / UL Listed / cUL Listed / EAC / cULus Listed /

### Approval details

**Functional Safety** 

**UL Listed** 

**cUL Listed** 

**EAC** 


# Safety relays - PSR-SPP-24DC/MXF1/4X1/2X2/B - 2902726

## Approvals


cULus Listed

## Drawings


### Application drawing

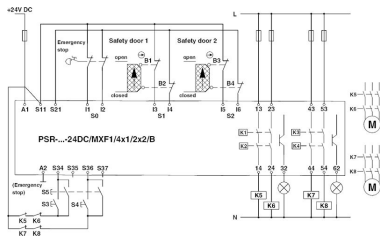


### Circuit diagram

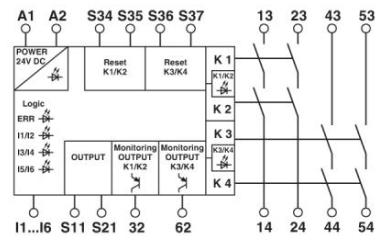

### Circuit diagram

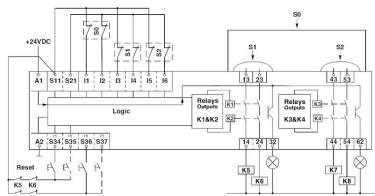

### Circuit diagram

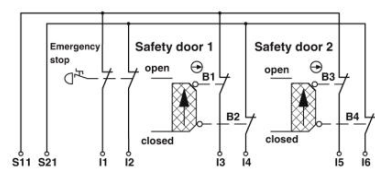

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>