Distributed by Conrad Electronic SE • Klaus-Conrad-Str. 1 • D-92240 Hirschau

Datasheet

Item no. 1586570

V1_0617_02_EN

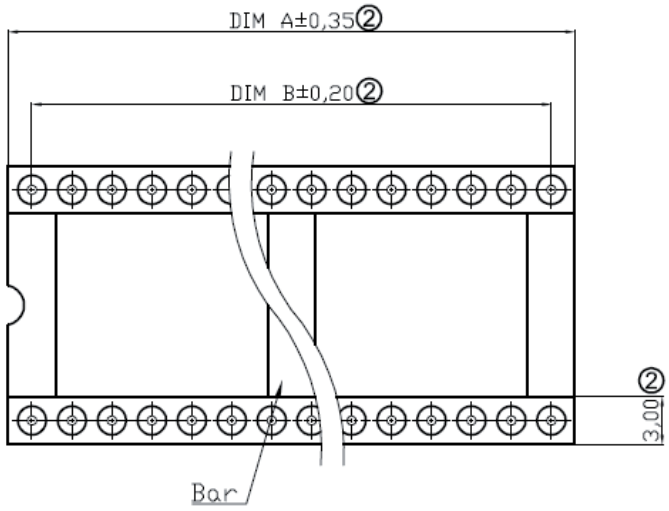

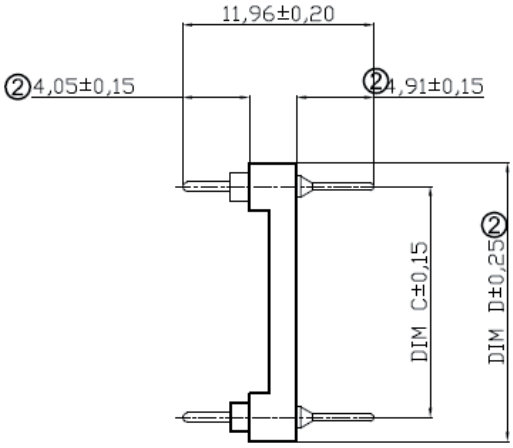

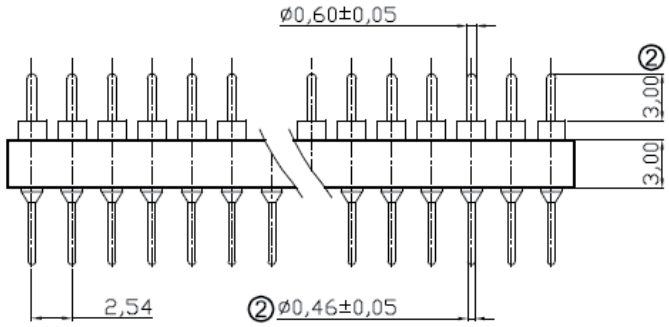

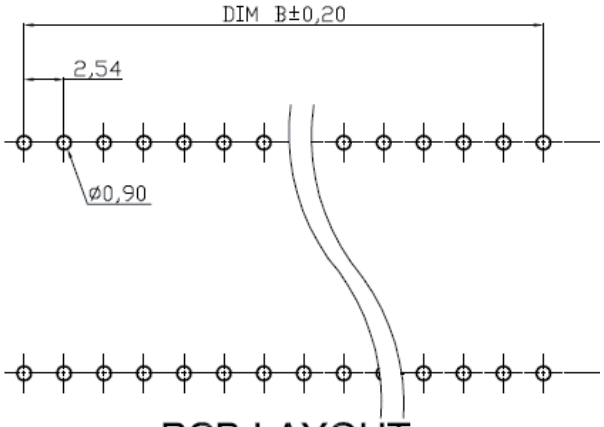

PCB LAYOUT

Contact	Dim A	Dim B	Dim C	Dim D	Note
16	20.32	17.78	7.62	10.16	w/o Bar

RoHS compliant

NOTES:

MATERIAL
1.Pin(outer sleeve): Brass, machined CuZn3
2.Plating(outer sleeve): 2um/80u"nickel, Gc
3.Insulator Material: Glass filled PBT(UL94V

ELECTRICAL
1.Current Rating: 3Amps/contact max.
2.Contact Resistance: 4mΩ/contact max.
3.Insulation Resistance: ≥10000MΩ at 500V
4.Voltage Rating: 100 VRMS/150VDC

MECHANICAL
1.Operation Temperature: -55°C to +105°C
2.Soldering temperature: +220°C,10s max.

Packing: Tube