
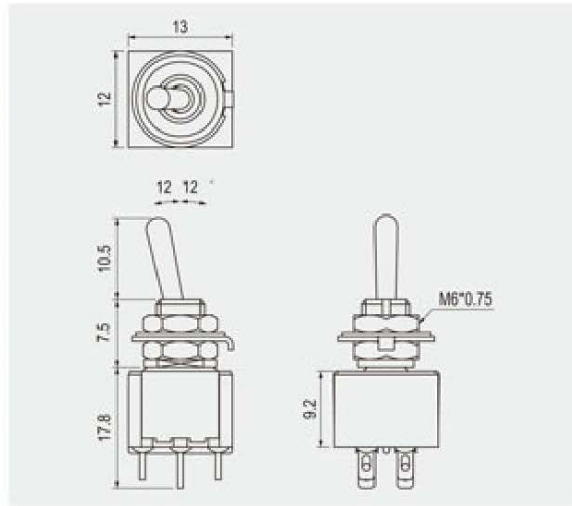












Mini Switch

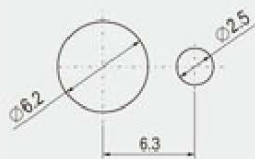

| |
|---|
| Rating |
| 6A 125V AC 3A 250V AC |
| Contact resistant |
| 50mΩ Max |
| Insulation resistant |
| DC 500V 100MΩ Min |
| Dielectric strength |
| AC 1000V 1 minute |
| Cut out |
|  |
|  |

FEATURES

- * MATERIAL: Phenolic base (UL flame: 94V-0).
Contacts and Terminals are copper with silver alloy and silver plated.
- * Epoxy sealed for dust and moisture resistant.
- * Colorful handle covers and waterproof boot are optional for toggle type A.

| FUNCTION | | LEVER | TERMINAL |
|--|--|---|--|
| <p>0 1</p>  <p>OFF 4P DPST ON</p> | <p>0 5</p>  <p>(ON) OFF ON 6P DPDT</p> | <p>A Standard</p>  | <p>1 SO</p> <p>2 PC</p> <p>3 PC Angle(2.54)</p> <p>5 PC Angle(3.8)</p> |
| <p>0 2</p>  <p>ON 6P DPDT ON</p> | <p>0 6</p>  <p>(ON) 6P DPDT ON</p> | <p>F Flat</p>  | |
| <p>0 3</p>  <p>ON OFF ON 6P DPDT</p> | | <p>G Plastic</p>  | |
| <p>0 4</p>  <p>(ON) OFF (ON) 6P DPDT</p> | | | |


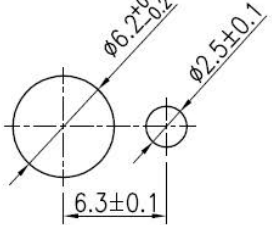

Unit: mm


This is a publication by Conrad Electronic SE, Klaus-Conrad-Str. 1, D-92240 Hirschau (www.conrad.com).

All rights including translation reserved. Reproduction by any method, e.g. photocopy, microfilming, or the capture in electronic data processing systems require the prior written approval by the editor. Reprinting, also in part, is prohibited. This publication represents the technical status at the time of printing.

© Copyright 2017 by Conrad Electronic SE.

Mini Switch

| Rating | 6A 125V AC 3A 250V AC |  | Mounting Hole |  | Circuit Diagram |  |
|-----------------------|--------------------------|---|---------------|--|-----------------|---|
| Contact Resistance | 50m ohm Max. | | | | | |
| Insulation Resistance | DC 500V 100M ohm Min. | | | | | |
| Dielectric Strength | AC 1000V 1 minute | | | | | |
| Switch Function | 6P DPDT ON-ON | | | | | |

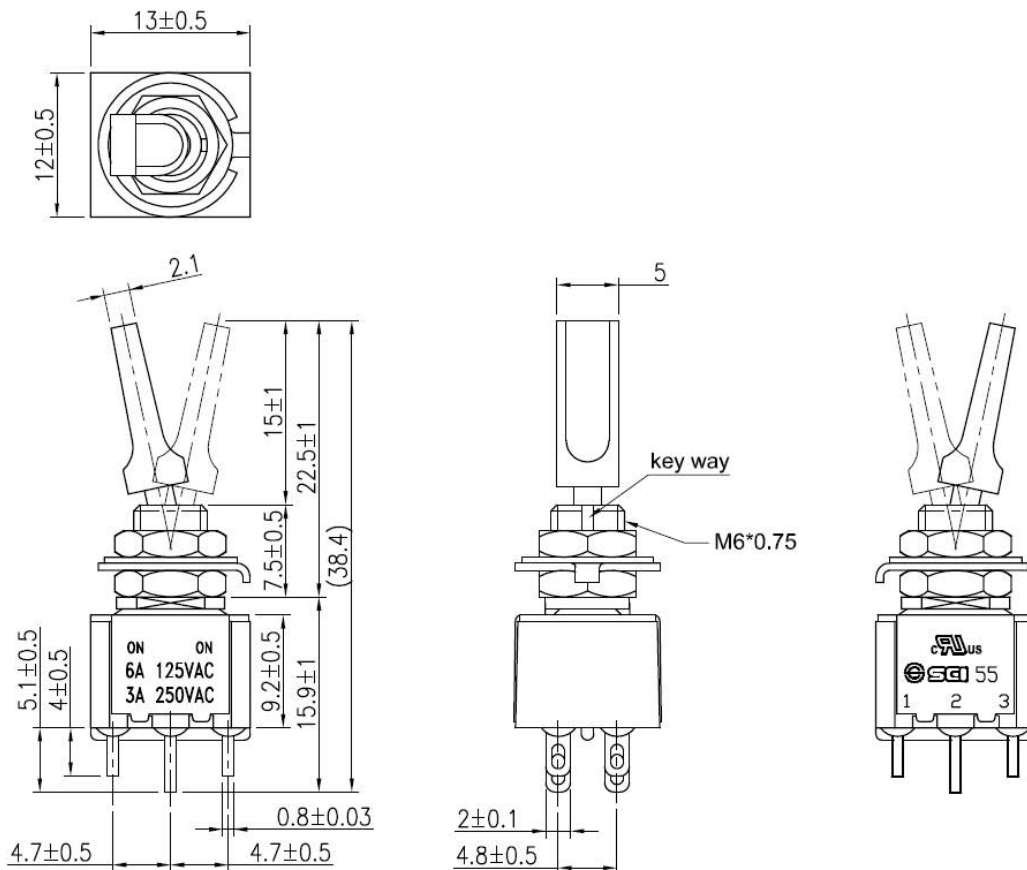

Tolerances Unless Otherwise Specified ± 0.3 Unit: mm

This is a publication by Conrad Electronic SE, Klaus-Conrad-Str. 1, D-92240 Hirschau (www.conrad.com).

All rights including translation reserved. Reproduction by any method, e.g. photocopy, microfilming, or the capture in electronic data processing systems require the prior written approval by the editor. Reprinting, also in part, is prohibited. This publication represents the technical status at the time of printing.

© Copyright 2017 by Conrad Electronic SE.