











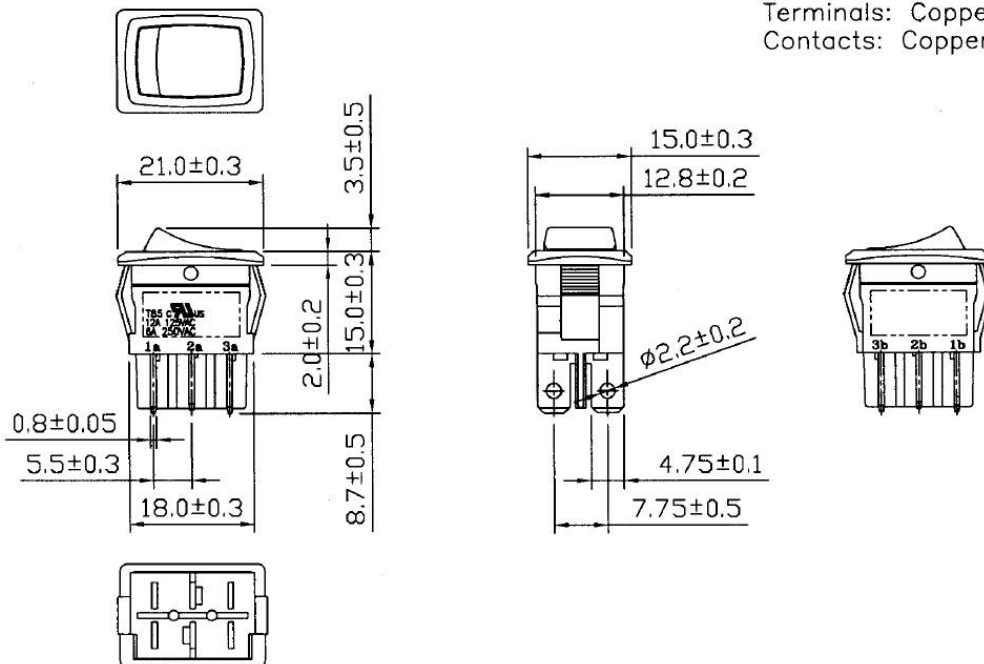
## Rocker Switch (No printing)

Rating	12A 125V 6A 250VAC		Mounting Hole			Circuit Diagram			
Contact R	50m ohm Max.					A		F	
Insulation R	DC 500V 100M ohm Min.					C		B	
Dielectric Strength	AC 1500V 1 minute					D		E	
Operation Temperature	-20°C~85°C					G		K	
Circuit	SEE TABLE								
			Thickness	X	Y				
			0.75...1.25	19.2-0.1	13+0.1				
			1.25...2	19.4-0.1	13+0.1				
			2...4	19.8-0.1	13+0.1				

	A	B	C	D	E	F	G	H	I	K	M	N	P	Q	R
	2P SPST ON-OFF	4P DPST ON-OFF	3P SPDT ON-ON	3P SPDT ON-OFF-ON	6P DPDT ON-ON	6P DPDT ON-OFF-ON	3P SPDT (ON)-OFF-(ON)	3P SPDT ON-OFF-(ON)	3P SPDT ON-(ON)	6P DPDT (ON)-OFF-(ON)	6P DPDT ON-OFF-(ON)	2P SPST (ON)-OFF	6P DPDT ON-(ON)	4P DPST (ON)-OFF	4P DPST ON-(OFF)

\*MATERIAL:  
 Frame: Nylon 66 (94-V2)  
 Actuator: Nylon 66 (94-V2)  
 Terminals: Copper alloy  
 Contacts: Copper alloy



Unit: mm

This is a publication by Conrad Electronic SE, Klaus-Conrad-Str. 1, D-92240 Hirschau (www.conrad.com).  
 All rights including translation reserved. Reproduction by any method, e.g. photocopy, microfilming, or the capture in electronic data processing systems require the prior written approval by the editor. Reprinting, also in part, is prohibited. This publication represents the technical status at the time of printing.