











# Rocker Switch

Rating	20A 125VAC 1/3HP, 16A 250VAC 1/2HP   	Mounting Hole 	Circuit Diagram 	
	16A 125VAC, 10A 250VAC 10(4)A 250V~ 16(4)A 250V AC			
Contact Resistance	50m ohm Max.	Thickness	X	Y
Insulation Resistance	DC 500V 100M ohm Min.	0.75~3	27.6-0.1	13.8+0.1
Dielectric Strength	AC 1500V 1 minute	3~4	27.8-0.1	13.8+0.1
Operation Temperature	-25°C~85°C	4~5	28.0-0.1	13.8+0.1
Switch Function	2P SPST OFF-(ON)			

Material:  
 Frame: Black, Nylon#66  
 Actuator: Black, Nylon#66  
 Terminals: Silver plated, Copper Alloy  
 Printed: Hot stamping, white

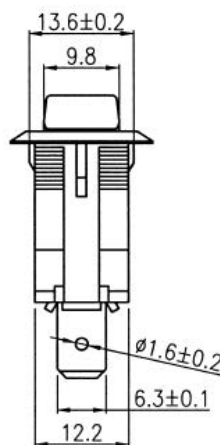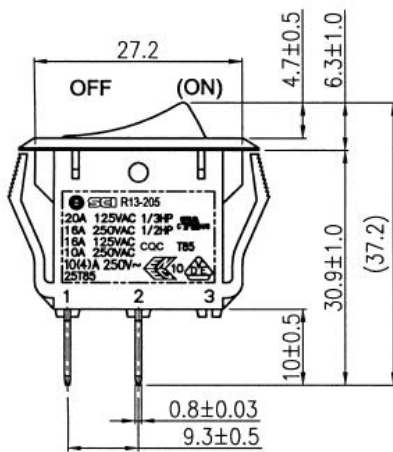

Tolerances Unless Otherwise Specified ±0.3mm Unit: mm

This is a publication by Conrad Electronic SE, Klaus-Conrad-Str. 1, D-92240 Hirschau (www.conrad.com).  
 All rights including translation reserved. Reproduction by any method, e.g. photocopy, microfilming, or the capture in electronic data processing systems require the prior written approval by the editor. Reprinting, also in part, is prohibited. This publication represents the technical status at the time of printing.

© Copyright 2017 by Conrad Electronic SE.