

**SB****Heat shrinkable tube in dispenser box**

thin wall, self-extinguishing, shrink ratio 3 : 1, without adhesive

Characteristics

- Back-winding mechanism facilitates rolling up of tube
- User friendly, notch prevents tube from rolling back into the box

Note

- Self-extinguishing (except transparent)
- See „SR1F3“ heat shrinkable tube for further information on product properties and technical data

Application/Suitability

- Insulating
- Bundling
- Marking
- Corrosion protection
- Mechanical protection

Material

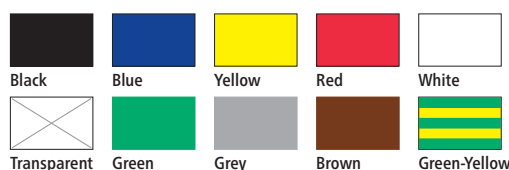
- Cross-linked polyolefin
- Free of lead and cadmium

Test standards

- Approved according to UL File No.: E 172094
- Corresponds to MIL-I-23053/5 class 1

Storage conditions/Shelf life

- Unlimited shelf life

**Colours****Scope of delivery**

Thin wall heat shrinkable tube in dispenser box

Note: A standard spool may include sections which have been tied together.

Type	L m	Inner-Ø mm		Recovered wall thickness mm	Art.-No.
		before shrinking	after shrinking		
Colour: Black					
SB	1.5-0.5	15	1.5	0.5	127097
	3.0-1.0	15	3	1	127104
	6.0-2.0	10	6	2	127111
	9.0-3.0	10	9	3	127118
	12.0-4.0	8	12	4	127125
	18.0-6.0	7	18	6	127132
	24.0-8.0	4	24	8	127139
Colour: Blue					
SB	1.5-0.5	15	1.5	0.5	127099
	3.0-1.0	15	3	1	127106
	6.0-2.0	10	6	2	127113
	9.0-3.0	10	9	3	127120
	12.0-4.0	8	12	4	127127
	18.0-6.0	7	18	6	127134
	24.0-8.0	4	24	8	127141
Colour: Yellow					
SB	1.5-0.5	15	1.5	0.5	127100
	3.0-1.0	15	3	1	127107
	6.0-2.0	10	6	2	127114
	9.0-3.0	10	9	3	127121
	12.0-4.0	8	12	4	127128
	18.0-6.0	7	18	6	127135
	24.0-8.0	4	24	8	127142
Colour: Red					
SB	1.5-0.5	15	1.5	0.5	127101
	3.0-1.0	15	3	1	127108
	6.0-2.0	10	6	2	127115
	9.0-3.0	10	9	3	127122
	12.0-4.0	8	12	4	127129
	18.0-6.0	7	18	6	127136
	24.0-8.0	4	24	8	127143
Colour: White					
SB	1.5-0.5	15	1.5	0.5	127102
	3.0-1.0	15	3	1	127109

→ Continued on the next page



Type	L m	Inner-Ø mm		Recovered wall thickness mm	Art.-No.	
		before shrinking	after shrinking			
(Continuation) Colour: White						
SB	6.0-2.0	10	6	2	0.65	127116
	9.0-3.0	10	9	3	0.75	127123
	12.0-4.0	8	12	4	0.75	127130
	18.0-6.0	7	18	6	0.75	127137
	24.0-8.0	4	24	8	1.00	127144
Colour: Transparent						
SB	1.5-0.5	15	1.5	0.5	0.45	127098
	3.0-1.0	15	3	1	0.55	144462
	6.0-2.0	10	6	2	0.65	127112
	9.0-3.0	10	9	3	0.75	127119
	12.0-4.0	8	12	4	0.75	127126
	18.0-6.0	7	18	6	0.75	127133
	24.0-8.0	4	24	8	1.00	127140
Colour: Green						
SB	1.5-0.5	15	1.5	0.5	0.45	200294
	3.0-1.0	15	3	1	0.55	127110
	6.0-2.0	10	6	2	0.65	127117
	9.0-3.0	10	9	3	0.75	200295
	12.0-4.0	8	12	4	0.75	127131
	18.0-6.0	7	18	6	0.75	127133
	24.0-8.0	4	24	8	1.00	127145
Colour: Grey						
SB	1.5-0.5	15	1.5	0.5	0.45	203674
	3.0-1.0	15	3	1	0.55	203675
	6.0-2.0	10	6	2	0.65	203676
	9.0-3.0	10	9	3	0.75	203677
	12.0-4.0	8	12	4	0.75	203678
	18.0-6.0	7	18	6	0.75	203679
	24.0-8.0	4	24	8	1.00	203680
Colour: Brown						
SB	3.0-1.0	15	3	1	0.55	203787
	6.0-2.0	10	6	2	0.65	203788
	9.0-3.0	10	9	3	0.75	203789
	12.0-4.0	8	12	4	0.75	203790
	18.0-6.0	7	18	6	0.75	203791
	24.0-8.0	4	24	8	1.00	203792
Colour: Green-Yellow						
SB	1.5-0.5	15	1.5	0.5	0.45	204297
	3.0-1.0	15	3	1	0.55	204298
	6.0-2.0	10	6	2	0.65	204299
	9.0-3.0	10	9	3	0.75	204310
	12.0-4.0	8	12	4	0.75	204311
	18.0-6.0	7	18	6	0.75	204312
	24.0-8.0	4	24	8	1.00	204313