




HUIYUAN OPTO-ELECTRONIC CO.,LTD.

TECHNOLOGY DATA SHEET & SPECIFICATIONS

MODEL: 5013K3C-BA

Features

- High reliability
- Peak wavelength $\lambda_p=940\text{nm}$
- Low forward voltage
- Pb free

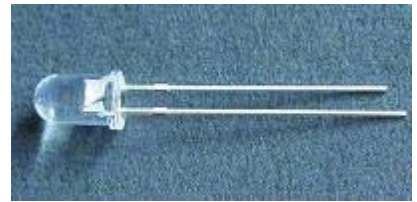

Descriptions

- HYLELED Infrared Emitting Diode is
Molded in transparent plastic package
- The device is spectrally matched with phototransistor, photodiode
and infrared receiver module

Usage Notes:

- Surge will damage the LED
- When using LED, it must use a protective resistor in series with DC current about 20mA

Applications

- Free air transmission system
- Infrared remote control units with high power requirement
- Smoke detector
- Infrared applied system




TECHNOLOGY DATA SHEET & SPECIFICATIONS

MODEL: 5013K3C-BA

Device Selection Guide

LED Part No.	Chip		Lens Color
	Material	Emitted Color	
5013K3C-BA	AlGaAs	Infrared	Water clear

Package Dimensions

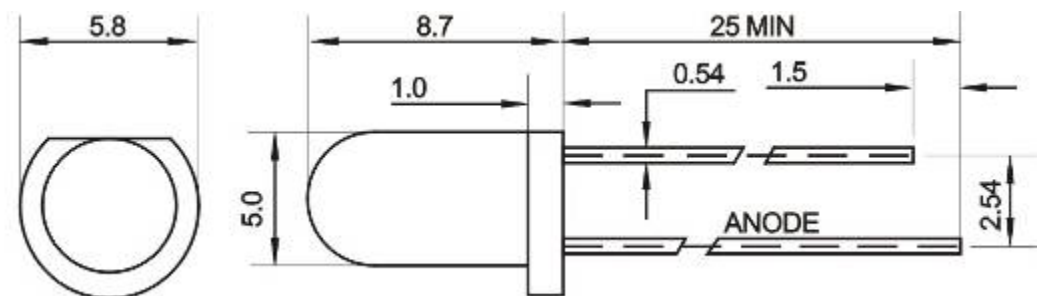

UNIT:mm

Notes:

- * Other dimensions are in millimeters, tolerance is 0.25mm except being specified.
- * Protruded resin under flange is 1.5mm Max LED.
- * Bare copper alloy is exposed at tie-bar portion after cutting.



TECHNOLOGY DATA SHEET & SPECIFICATIONS

MODEL: 5013K3C-BA

Electro-Optical Characteristics (Ta=25□)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Radiant intensity	Ee	7	---	12	mW/Sr	IF=20mA(Note1)
Viewing Angle	2θ _{1/2}	---	30	---	Deg	(Note 2)
Peak Emission Wavelength	λ _p	---	940	---	nm	IF=20mA
Spectral Line Half-Width	Δλ	---	45	---	nm	IF=20mA
Forward Voltage	V _F	1.2	---	1.5	V	IF=20mA
Reverse Current	I _R	---	---	10	μA	VR=5V

Note:

1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. θ_{1/2} is the off-axis angle at which the luminous intensity is half the axial luminous intensity.




TECHNOLOGY DATA SHEET & SPECIFICATIONS


MODEL: 5013K3C-BA

Typical Electro-Optical Characteristics Curves


Relative Intensity VS. Wavelength

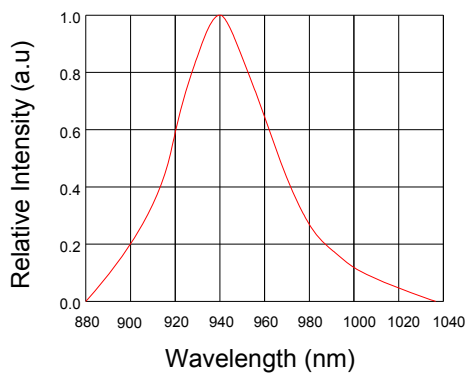


Forward Current VS. Forward Voltage

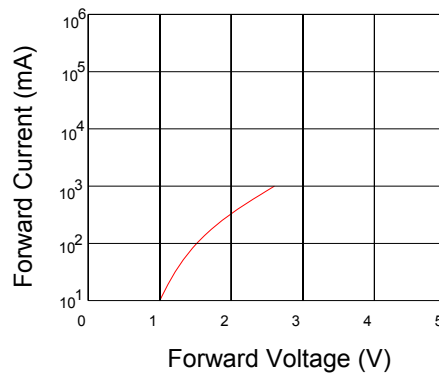


Relative Intensity VS. Ambient Temp

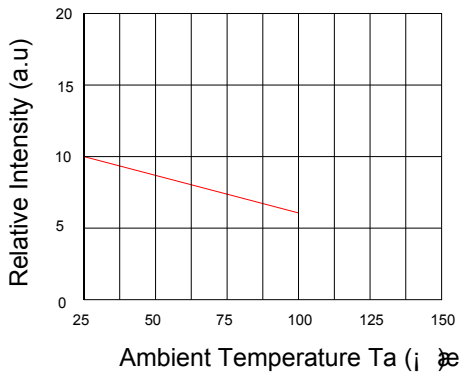


Forward Current VS. Relative Intensity

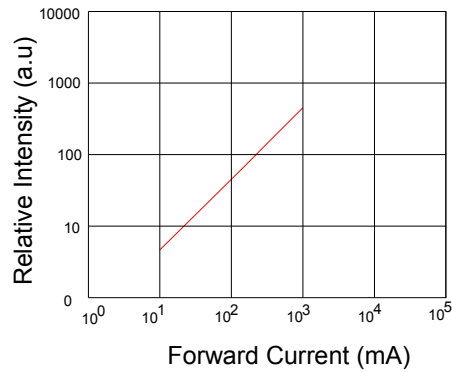

Forward Current VS. Ambient Temp.

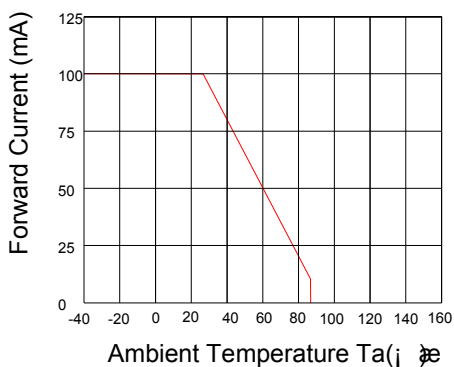

Radiation Characteristics

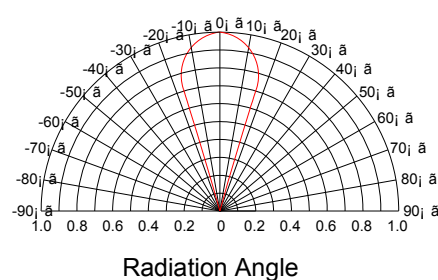



HUIYUAN OPTO-ELECTRONIC CO.,LTD.

TECHNOLOGY DATA SHEET & SPECIFICATIONS

MODEL: 5013K3C-BA

Notes

1. Above specification may be changed without notice. Hyled will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. Hyled assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of Hyled corporation. Please don't reproduce or cause anyone to reproduce them without Hyled's consent.