


### Distributed by Conrad Electronic SE • Klaus-Conrad-Str. 1 • D-92240 Hirschau

## **Datasheet**

Item no. 1606634

V1\_18012018\_01\_en

#### Unit = mm

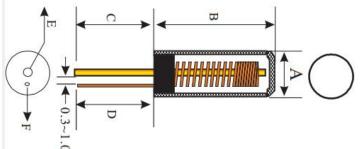

| A   | В    | C | D | Е   | F    |
|-----|------|---|---|-----|------|
| 4.8 | 15.5 | 8 | * | 0.6 | 0.15 |

# Spring type vibration switch


Voltage: <12V
Current: <20mA
Conductive time: About 2ms
Closed resistance: <30 ohm
Open resistance: >10M ohm
Temperature range: -40 to 80 °C

Pull force of terminal: 500gf for 1 minute

Humidity: 95% RH,  $40^{\circ}$ C for 96 hours Operating lifespan: Above 200000 circle

#### Features:

Switch is open circuit OFF-state at rest. when the external force is touched, or the speed of movement is appropriate, the switch transient ON-state, when external force disappear, switch back to open circuit OFF-state.

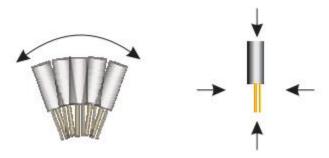

This is a publication by Conrad Electronic SE, Klaus-Conrad-Str. 1, D-92240 Hirschau (www.conrad.com).

All rights including translation reserved. Reproduction by any method, e.g. photocopy, microfilming, or the capture in electronic data processing systems require the prior written approval by the editor. Reprinting, also in part, is prohibited. This publication represents the technical status at the time of printing.