

Remote control switch with 3 NO contacts Contact for 230 V AC, 400V 16A Control 24 V AC



Model	
Product brand name	SENTRON
Product designation	Remote control switch
Latching relay design	Mechanical switch
General technical data	
Electrical endurance (switching cycles)	50 000
Pulse duration / minimum	50 ms
Galvanic isolation / between magnet coil and contact	Yes
Switching voltage / of the contacts / at AC / minimum	10 V
Switching current / at AC / per contact / minimum	100 mA
Power loss [V·A] / of magnet coil / with pulse / rated value	7 V·A
Voltage	
Continuous voltage fuse version	PTC
Surge voltage resistance / rated value	4 kV
Supply voltage	400 V
Supply voltage	
Type of voltage	AC

Supply voltage	250 ... 400 V
Protection class	
Protection class IP	IP20, with connected conductors
Switching capacity	
Switching capacity apparent power	
<ul style="list-style-type: none"> • for fluorescent lamp load with DUO circuit 	900 V·A
<ul style="list-style-type: none"> • for fluorescent lamp load with parallel compensation 	400 V·A
<ul style="list-style-type: none"> • for uncompensated fluorescent lamp load 	500 V·A
Switching capacity current	
<ul style="list-style-type: none"> • at cos phi 0.6 	16 A
<ul style="list-style-type: none"> • Rated value 	16 A
Switching capacity active power / with filament lamp load	2 000 W
Dissipation	
Power loss [W]	
<ul style="list-style-type: none"> • at 16 A / per contact / rated value 	1.2 W
<ul style="list-style-type: none"> • of magnet coil / with pulse / rated value 	4.5 W
Switching current	
<ul style="list-style-type: none"> • with glow lamp load / with 5TT4 920 compensating capacitor 	25 mA
<ul style="list-style-type: none"> • with glow lamp load 	5 mA
Control current	
Type of voltage	
<ul style="list-style-type: none"> • of control voltage_1 	AC
Control voltage	
<ul style="list-style-type: none"> • _1 / initial value 	19.2 V
<ul style="list-style-type: none"> • _1 / Full-scale value 	26.4 V
<ul style="list-style-type: none"> • _1 / setpoint 	24 V
Control voltage frequency	
<ul style="list-style-type: none"> • _1 / initial value 	50 Hz
<ul style="list-style-type: none"> • _1 / Full-scale value 	50 Hz
Operating range factor control supply voltage rated value / at AC / at 50 Hz	
<ul style="list-style-type: none"> • initial value 	0.8
<ul style="list-style-type: none"> • Full-scale value 	1.1
Product details	
Product component / Switch position indicator	Yes
Product function	
Product function / direct operation	Yes

Number	
Number of terminals	8
Number of NC contacts	0
Number of NO contacts	3
Number of CO contacts	0

Connections	
Connectable conductor cross-section	
<ul style="list-style-type: none"> • for flexible conductor / with core end processing • for rigid conductor 	1 ... 6 mm ²
Tightening torque / with screw-type terminals	0.8 ... 1 N·m

Mechanical Design	
Width of opening / of the contacts	1.2 mm
Mounting height	90 mm
Installation depth	70 mm
Number of width units	1
Mounting type	DIN rail
Mounting position	any
Required spacing / for live parts	6 mm
Net weight	195 g

Environmental conditions	
Ambient temperature	-10 ... +40 °C

Certificates		
General Product Approval	Declaration of Con- formity	Test Certificates



[Miscellaneous](#)



[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5TT4103-2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5TT4103-2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT4103-2

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

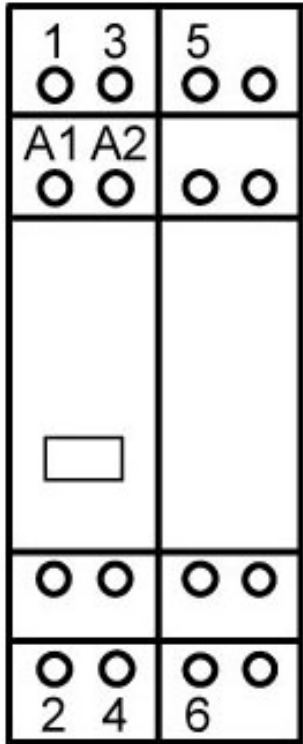

I2Y1_00396

36

