DIGITUS®

USB Type-C™ - HDMI + VGA adapter

User Manual
DA-70858

1.0 INTRODUCTION

The USB Type-C™ - HDMI + VGA video adapter extends your USB-C™ device with two video ports (HDMI and VGA). Connect an additional TV set or monitor to your laptop or hold a presentation with a projector. The highest possible resolution is UHD (4K/30Hz). You can use an additional monitor provided two monitors are connected, with the HDMI port having the priority. The video adapter is suitable for all operating systems: Windows®, Mac®, Google Chrome®.

Note: If two outputs are connected, then only one output can receive the input signal. The priority sequence is: HDMI, VGA

2.0 FEATURES

- Support Type-C input, HDMI and VGA output
- Type-C™ supports reversible plug
- Support HDMI Resolution up to 4K/30Hz, UHD
- Support HDMI 9 GB/s Bandwidth
- Support VGA Resolution up to 1920x1200/60Hz, Full HD
- Support Plug & Play

3.0 SPECIFICATIONS

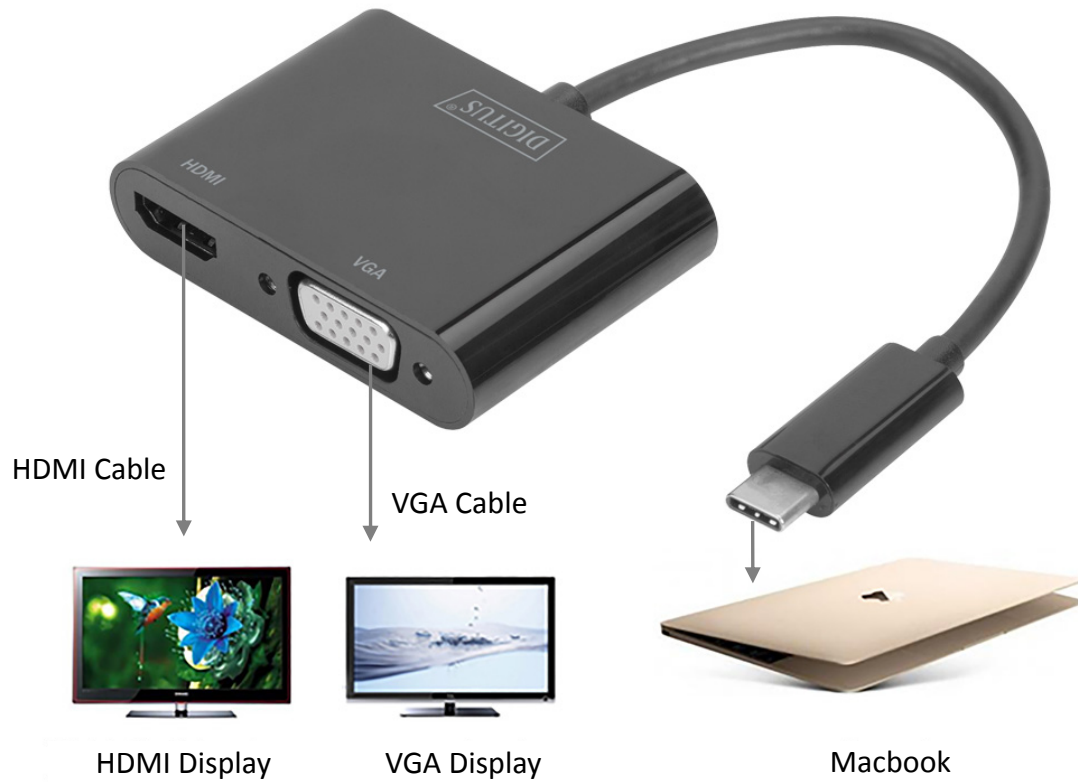| Input/Output Connector	
Input	1x USB-C™ plug
Output	1x HDMI socket
	1x VGA socket
Resolution	
HDMI	up to 4K/30Hz, UHD
VGA	up to 1920x1200/60Hz, Full HD
Mechanical	
Size	60 x 42 x 15 mm
Environmental	
Operating temperature	0°C~45°C
Operating humidity	10% ~ 85 % RH (no condensation)
Storage temperature	-10°C ~ 70°C
Storage humidity	5% ~ 90 % RH (no condensation)
Power requirement	
Power source	Bus powered via USB-C™

4.0 PACKAGE CONTENTS

Before attempting to use this unit, please check the packaging and make sure the following items are contained in the shipping carton:
- Main unit x1
- User Manual x1

5.0 OPERATION

1) Connect the USB-C™ plug of this product to computer
2) Connect HDMI socket of this product to an HDMI monitor
3) Connect VGA socket of this product to a VGA monitor

6.0CONNECTION DIAGRAM

HDMI Cable

VGA Cable

HDMI Display

VGA Display

Macbook

Hereby Assmann Electronic GmbH, declares that the Declaration of Conformity is part of the shipping content. If the Declaration of Conformity is missing, you can request it by post under the below mentioned manufacturer address.