

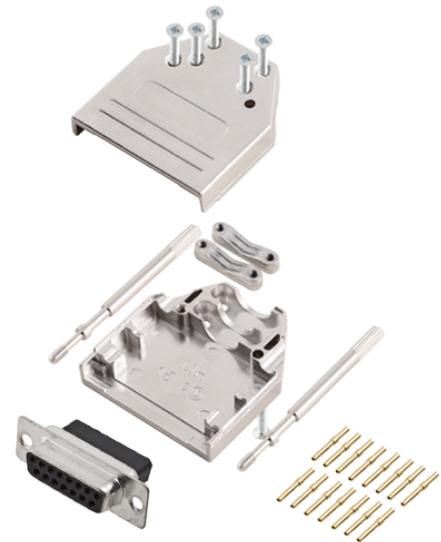
## TECHNICAL SPECIFICATIONS

**D-Sub Hood:**

Housing material:  
 Operating Temperature:  
 Cable Entry: Top  
 Thumbscrews:  
 Cable O.D:

**D-Sub Crimp:**

Insulator: PBT, Black, UL94 V-0  
 Shell: Stamped Steel, Tin Plated  
 Contact pins: Copper Alloy  
 Machined pins Class 2: 200 inserts min  
 Contacts Plating: Hard Gold over Nickel  
 Operating Temperature: -55°C to +125°C  
 Test voltage: 1000V  
 Insulator resistance: <math><5\Omega</math>  
 Crimp Area (AWG): AWG 24-20  
 0.2 - 0.6mm<sup>2</sup>

**Features:**

- D-sub hood + D-sub connector solder cup
- Available in sizes 9, 15, 25,37 and 50-way
- Full metall cover
- Packed in Kit with male or female D-sub connector
- Class 3 or Class 1 D-sub connector as standard
- Re-openable

## Ordering information:

**D-Sub Connector Kits (200 inserts min.)**

Size:	P/N - Kitted:	Product Code - MALE Conn. Kit
9-way	6355-0079-01	DTZI09-DBCP-K
15-way	6355-0079-02	DTZI15-DBCP-K
25-way	6355-0079-03	DTZI25-DBCP-K
37-way	6355-0079-04	DTZI37-DBCP-K
55-way	6355-0079-05	DTZI50-DBCP-K

Size:	P/N - Kitted:	Product Code - FEMALE Conn. Kit
9-way	6355-0079-11	DTZI09-DBCS-K
15-way	6355-0079-12	DTZI15-DBCS-K
25-way	6355-0079-13	DTZI25-DBCS-K
37-way	6355-0079-14	DTZI37-DBCS-K
55-way	6355-0079-15	DTZI50-DBCS-K