

Constant Current LED Power Supply

FCC linear series

SLT80-700IL-EU



Product description :

This type of power supply is an exclusively designed stabilized power supply for LED lamp. With constant current (CC) technology, it is suitable for constant current lamps connected in a series. According to the switches selection, the output current can change from 325mA to 700mA. The current step is 25mA.

The built-in protection circuit will shut down the power supply in case of such faults as: open circuit, short circuit, over load or over temperature. The power supply will restart automatically after fault correction.

Standards:

EN61347-1
EN61347-2-13
EN61547
EN55015
EN61000-3-2
EN61000-3-3
EN62384
EN62493
EN50172


Characteristics:

- Built-in power supply for constant current LED lamp
- Plastic housing with function ground
- Non-isolated design have high performance/cost ratio
- Quick connection terminal for wire cross section 0.75-1mm²
- Selectable output current according to the dipswitch from 325-700mA
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- up to 94% efficiency
- Warranty:5years


Specifications:

Model		SLT80-700IL-EU															
Output	turn on time(S)	≤0.5															
	output current(mA)	325	350	375	400	425	450	475	500	525	550	575	600	625	650	675	700
	output current tolerance ^①	+/-5%															
	output current regulation	±10%															
	ripple current(mA) ^③	≤3%															
	working voltage range(V)	120-246	20-228	20-213	20-200	80-188	80-178	80-168	80-160	70-152	70-145	70-139	70-133	60-128	60-123	60-118	60-114
	Max. output voltage(V)	420															
	dimming interface	No															
	dimming range	n/a															
Input	rated supply voltage(Vac)	220-240															
	voltage range(Vac)	198-264															
	line frequency(Hz)	50/60															
	input current(mA)	410															
	efficiency ^②	94.0%	93.9%	93.8%	93.6%	93.5%	93.4%	93.2%	93.0%	92.8%	92.6%	92.5%	92.5%	92.3%	92.2%	92.1%	92.0%
	power factor ^②	0.90C															
	inrush current(lpk)	40A/140us															
Protection	over voltage protection	n/a															
	short circuit protection	YES															
	over temperature protection	YES															
	automatic restart	YES															
	over load protection	YES															
	surge capacity	L-N: 1KV L,N-PE: 2KV															
Ambient and Life	Ta(°C)	-20-50															
	Tc max. (°C)	90															
	audible noise(dB)	25															
	Storage Temperature(°C)	-30...80															
	ambient humidity range	5%...85%RH, Not condensing															
	nominal life-time(hrs)	50'000@Tc=90 C															
Other	weight(g)	230															
	dimensions (LxWxH)(mm)	280x30x22															
	casing material	plastic															
	housing colour	grey															
	type of protection	IP20															
	protection class	Built-in															
Note	<p>1.Tolerance : includes set up tolerance, line regulation and load regulation. 2.Tested at full load,230Vac.Refer to"Power Factor" and "EFFICIENT"curve graphs. 3.Output LF current ripple (< 200 Hz) 4.All parameters NOT specially mentioned are measured at nominal voltage input, rated load and 25 of ambient temperature. 5.The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.</p>																



Dimensions(mm):

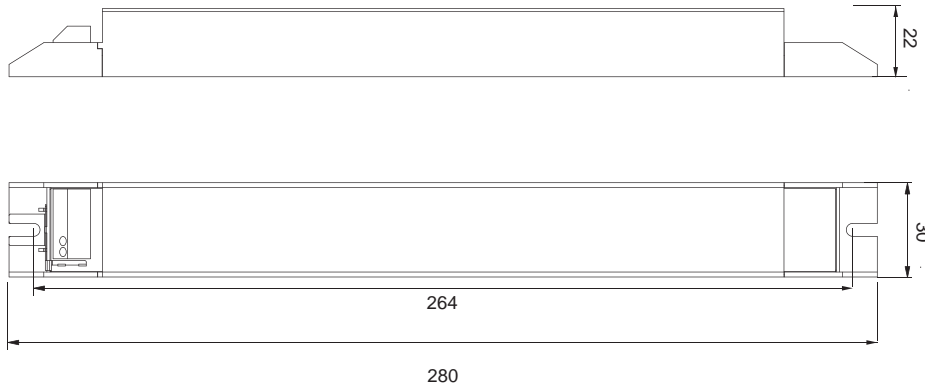

Wiring diagram:

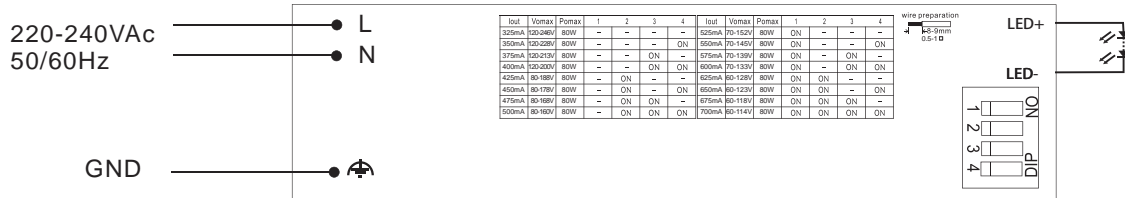

Electrical curves:

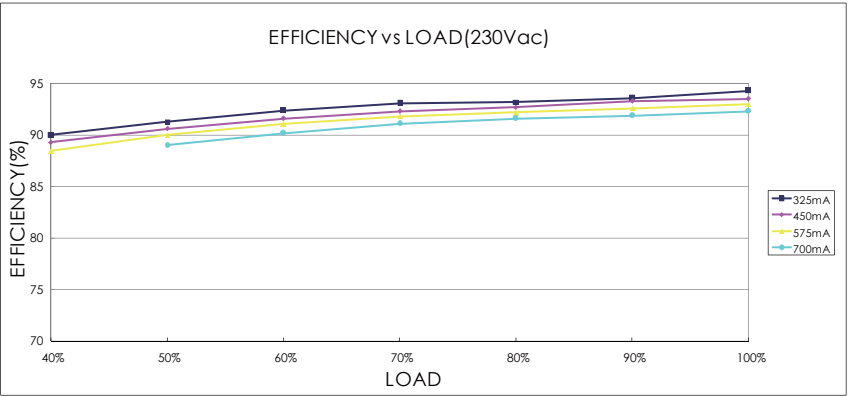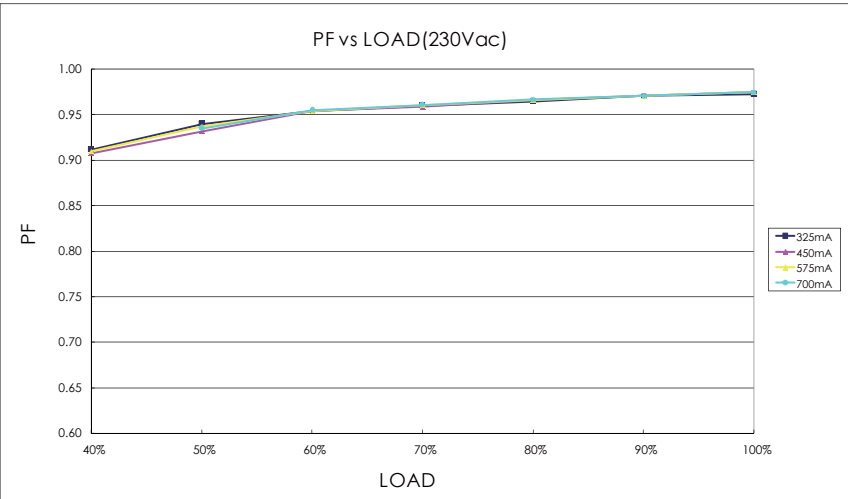

note
For constant current power supply, "LOAD" means the percentage of the maximum rated output voltage.
For constant voltage power supply, "LOAD" means the percentage of the maximum rated output current.

Sales & Technical Support:

Self Electronics Co.,Ltd.

Add: No. 1345 Ju Xian Road, Ningbo Hi Tech Park, Ningbo, China

Tel: 0086-574-28805765,28805658(For English Assistance)

0086-574-28805678 (For Chinese Assistance)

Fax: 0086-574-28805656

E-mail: sales@self-ecg.com

<http://www.self-ecg.com>

Self Electronics Co.,Ltd.,Shenzhen Office

Add: Room2007,Xinglang Xuan,Xinghe Mingju,Fuming Road,Futian District,Shenzhen

Tel: 0086-755-83558850, 83558851

Fax: 0086-755-83558840

SELF ELECTRONICS GERMANY GMBH

Add:August-Horch-Str. 7,51149 Koeln

Tel: 0049 2203 18501-0

Fax: 0049 2203 18501-199

E-mail: saleseu@self-electronics.com

*Due to continuous improvements and innovations,specifications are subjected to change without notice.