


Han 70A Hybrid module, male 6-16mm²

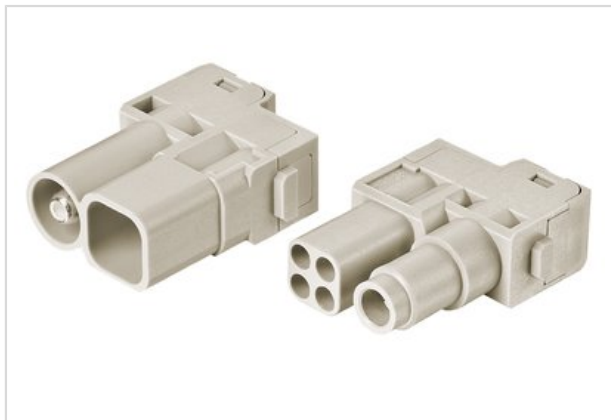

Part number	09 14 005 2646
Specification	Han 70A Hybrid module, male 6-16mm ²
HARTING eCatalogue	https://b2b.harting.com/09140052646

Identification

Category	Modules
Series	Han-Modular [®]
Type of module	Han [®] 70 A Hybrid module

Version

Termination method	Axial screw termination / crimp termination
Gender	Male
Number of contacts	1
Additional contacts	+ 4 additional signal contacts
Details	Please order signal contacts separately.

Technical characteristics

Conductor cross-section	6 ... 16 mm ²
Electrical data acc. to IEC 61984	70 A 1,000 V 8 kV 3
Rated current	70 A
Rated voltage	1,000 V
Rated impulse voltage	8 kV
Pollution degree	3
Electrical data, signal	16 A 400 V 6 kV 3
Rated current (signal)	16 A
Rated voltage (signal)	400 V
Rated impulse voltage (signal)	6 kV
Pollution degree (signal)	3
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤0.5 mΩ
Limiting temperature	-40 ... +125 °C
Stripping length	11 ... 12 mm
Tightening torque	2 Nm @ 6 mm ² 3 Nm @ 10 mm ²



Pushing Performance

Technical characteristics

	4 Nm @ 14 mm ²
	4 Nm @ 16 mm ²
Mating cycles	≥500

Material properties

Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0,35 % lead by weight 6c: Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	Yes
REACH SVHC substances	Lead

Specifications and approvals

Specifications	EN 60664-1 IEC 61984
Approvals	DNV GL
UL / CSA	UL 1977 ECBT2.E235076

Commercial data

Packaging size	2
Net weight	22.6 g
Country of origin	Germany
Customs tariff number	85366990