


Labels for control panel identification, thermal transfer

Helatag 1216 (White) for rough surfaces

The specially formulated adhesive labels give the highest quality print clarity when printed on thermal transfer printers. The range of materials and ribbons have been developed to suit the needs of most users. Designing and printing labels is simple and users can quickly print out professional labels in a matter of moments when using TagPrint Pro labelling software.


Features and Benefits

- Suited to labelling electrical panels
- Excellent print performance using TT822OUT ribbon
- Print with TT4000+, TT430 for best results
- Easy label design with Tagprint Pro

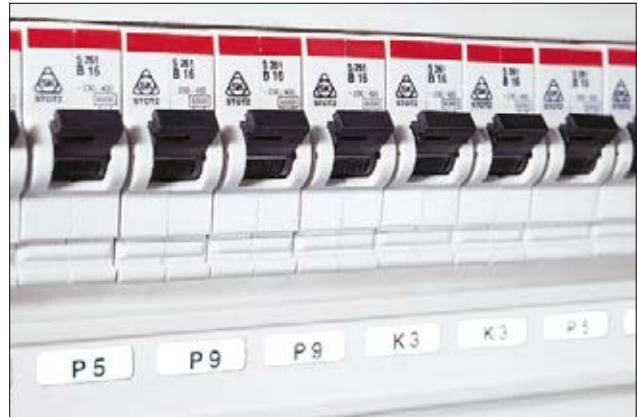

Clear and permanent identification.

MATERIAL	Type 1216, Polyethylene (PE), white (WH)
Operating Temperature	-30 °C to +60 °C
Curing Temperature	from 0 °C
Adhesive	Acrylic
Thickness of Foil (µm)	110 µm
Chem. Material Properties	Resistant to water, alcohol, most oils, greases, fuel, aliphatic solvents, weak acids, salts and alkalis.
Recommended Ribbon Type	TT822OUT



TYPE	Width (W)	Height (H)	Width of Liner (WL)	Labels per Row	Pack Cont.	Colour	Article-No.
TAG05-08TC-1216-WH	5.0	8.0	85.0	16	25,000 pcs.	White (WH)	596-12147
TAG05-15TC-1216-WH	5.0	15.0	85.0	16	25,000 pcs.	White (WH)	596-12151
TAG06-10TC-1216-WH	6.0	10.0	85.0	13	25,000 pcs.	White (WH)	596-12149
TAG08-15TC-1216-WH	8.0	15.0	85.0	10	25,000 pcs.	White (WH)	596-12152

All dimensions in mm. Subject to technical changes.

Minimum Order Quantity (MOQ) may differ from package content. Other packaging options may also be available.