# SC10220KT V ACTIVE

Sigma | Sigma SC TE Internal #: 1623947-2 Sigma SC, High Frequency & RF Inductors, Radio Frequency, Through Hole - Solder, Ammo Packed, 10 x 4.2 mm, 10 Passive Component Tolerance

View on TE.com >



#### Inductor Type: Radio Frequency

Termination Method to Printed Circuit Board: Through Hole - Solder

Packaging Method: Ammo Packed

Passive Component Dimensions: 10 x 4.2 mm

Passive Component Tolerance: 10 %

#### Features

#### **Product Type Features**

Inductor Type

Element Type

connectivity

Passive Components > Inductors > High Frequency & RF Inductors

Radio Frequency

Wire Wound

Electrical Characteristics

| Self Resonant Frequency                     | .027 GHz              |
|---|-----------------------|
| Passive Component Tolerance                 | 10 %                  |
| Inductance                                  | 22 μΗ                 |
| Current Rating (Max)                        | 280 mA                |
| DC Resistance                               | 3 Ω                   |
| Body Features                               |                       |
| Passive Component Lead Type                 | Axial-Leaded          |
| Termination Features                        |                       |
| Termination Method to Printed Circuit Board | Through Hole - Solder |
| Dimensions                                  |                       |
| Passive Component Dimensions                | 10 x 4.2 mm           |
| Usage Conditions                            |                       |
| Operating Temperature Range                 | -55 – 100 °C          |
| Packaging Features                          |                       |
|   |                       |

**C** For support call+1 800 522 6752

07/30/2021 11:34AM | Page 1

### SC10220KT

Sigma SC, High Frequency & RF Inductors, Radio Frequency, Through Hole - Solder, Ammo Packed, 10 x 4.2 mm, 10 Passive Component Tolerance



| Packaging Method  | Ammo Packed   |
|---|---|
| Other   |   |
| Inductor Quality Factor   | 55  |
|   |   |
| Product Compliance  |   |
| For compliance documentation, visit the product page on TE.com> |   |
| EU RoHS Directive 2011/65/EU                                    | Compliant   |
| EU ELV Directive 2000/53/EC                                     | Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016                   | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006                          | Current ECHA Candidate List: JAN 2021<br>(211)<br>Candidate List Declared Against: JUN 2020<br>(209)<br>SVHC > Threshold:<br>Not Yet Reviewed |
| Halogen Content   | BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.  |
| Solder Process Capability                                       | Wave solder capable to 265°C  |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**



## SC10220KT

Sigma SC, High Frequency & RF Inductors, Radio Frequency, Through Hole - Solder, Ammo Packed, 10 x 4.2 mm, 10 Passive Component Tolerance




TE Part # 1624019-2 SC30-10-2531-10 33UH AMMO 1000

# Also in the Series | Sigma SC




# Customers Also Bought

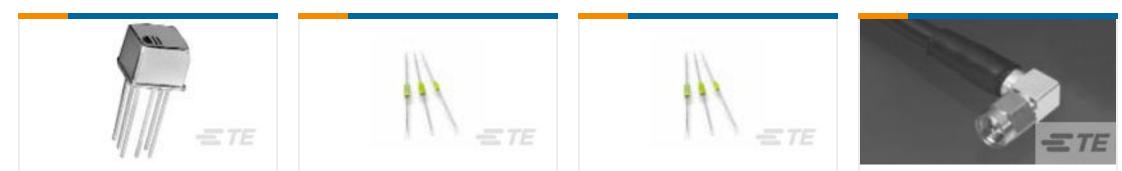


| TE Part #1617145-9<br>JMGAC-26M = M39016/17-036M | TE Part #1623952-1<br>SC10-10-0531-10 33UH AMMO 1000 | TE Part #1623957-2<br>SC10-10-0533-10 47UH AMMO 1000 | TE Part #1052179-1<br>2037 8106 92 |  |
|--|--|--|------------------------------------|--|
|  |  |  |                                    |  |



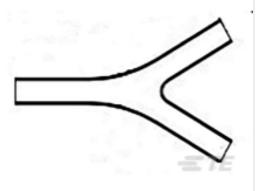

TE Part #1624212-1 23E 5KA 6.35X50FL B7

TE Part #CR6677-000 381A301-51/164-0-CS1821

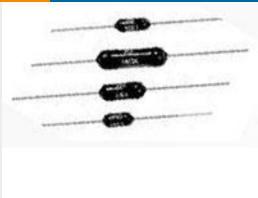

TE Part #1-1879683-5 H8 150R 0.1% 50PPM



TE Part #1617778-6 MW3HPS-5PG=3GHZ MICROWAVE RELAY



### SC10220KT

Sigma SC, High Frequency & RF Inductors, Radio Frequency, Through Hole - Solder, Ammo Packed, 10 x 4.2 mm, 10 Passive Component Tolerance



# Documents

Product Drawings SC10-10-0529-10 22UH AMMO 1000

English

### CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1623947-2\_BA.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1623947-2\_BA.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1623947-2\_BA.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 1309350\_PASSIVE\_COMPONENT

English

Axial Leaded Power Inductors - Type SC10, SC15, SC30 Series - Tyco Electronics Passives

English