



Connectors > D-Shaped Connectors > D-Sub Connectors > PCB D-Sub Connectors >
D-Sub Receptacle Assy: Vertical, Action Pin, Shell Size 3, 2.77mm



Connector & Housing Type: **Receptacle**
Connector System: **Board-to-Board**
Number of Positions: **25**
Centerline (Pitch): **2.77 mm [.109 in]**
Number of Rows: **2**

[All D-Sub Receptacle Assy: Vertical, Action Pin, Shell Size 3, 2.77mm \(9\)](#)

Features

Product Type Features

Grounding Indents	Without
Grounding Straps	Without
Grounded	No
Shell Type	All Plastic
Connector & Housing Type	Receptacle
Connector System	Board-to-Board
D-Sub Shell Size	3
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Shielded	No
Product Type	Connector

Configuration Features

Number of Positions	25
Number of Rows	2
PCB Mount Orientation	Vertical
Preloaded	Yes



Body Features

Plastic	Yes
Female Screwlock Material	Brass
Female Screwlock Plating Material	Nickel
Connector Profile	Low

Contact Features

Contact Mating Area Plating Material	Gold Flash
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy

Termination Features

Grounding Clips	Without
Termination Method to Printed Circuit Board	Through Hole - Press-Fit
Termination Post Length	5.8 mm[.228 in]

Mechanical Attachment

Panel Mount Feature	Without
PCB Mount Retention	With
PCB Mount Retention Type	Action/Compliant Tail, Mounting Hole
Mating Retention	With
Mating Retention Type	Female Screwlocks, Fixed
Connector Mounting Type	Board Mount
Mounting Hole Diameter	3.05 mm[.12 in]

Housing Features

Centerline (Pitch)	2.77 mm[.109 in]
Housing Material	Nylon GF
Housing Color	Black

Dimensions

Row-to-Row Spacing	2.84 mm[.112 in]
PCB Thickness (Recommended)	2.36 mm[.093 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application



Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Tray
Packaging Quantity	78

Product Compliance

For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2020 (205) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



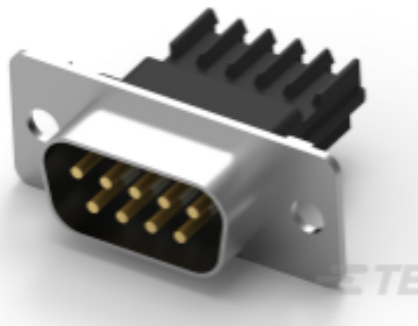

TE Part # CAT-AM7-248H3
IDC D-Sub: Plug Assembly, Wire to Wire, Signal, 2.77 mm



TE Part # 206509-1
SIZE 20 KEYING PLUG


Customers Also Bought



TE Part #1410142-1
MULTIGIG RT T2.8" BP FULL RGH



TE Part #1410140-1
MULTIGIG RT T2.8" BP FULL CNT

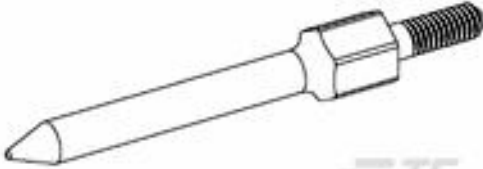


TE Part #1469269-6
GUIDE PIN 10.0 THREAD LENGTH



TE Part #103323-2
02 MODII HDR SRRA B/A .100CL



TE Part #2000676-7
Keyed Guide Pin, Machined

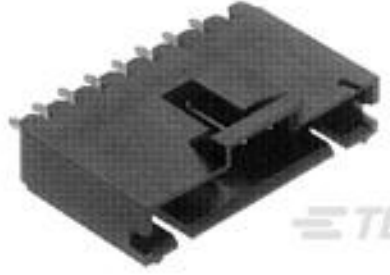

TE Part #1-103669-1
12 MTE HDR SRST LATCH W/HLDWN



TE Part #2309390-2
VERT RECPT, MULTI-BEAM XLE, VITA 62



TE Part #6469083-2
HMZD 3PAIR, HDR ASSY, 25MM MOD



TE Part #1-1879338-3
CPF 0603 35K7 1% 50PPM 1K RL



TE Part #2-1393763-6
V23100V4312B000

Documents

Product Drawings
25 RCPT ACT PIN/AP LOW SCRLK
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_5745458-1_C.2d_dxf.zip



English

Customer View Model

[ENG_CVM_CVM_5745458-1_C.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5745458-1_C.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[AMPLIMITE Subminiature D Connectors - Straight Posted Connectors](#)

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL Report](#)

English