# 5413760-3 - ACTIVE

TE Internal #: 5413760-3 RF Connectors, BNC RF Interface, Jack, RF Connector Mated Outer Diameter (Approximate) .572 in [14.53 mm], 75 Ω View on TE.com >



Connectors > RF Coax Connectors > RF Connectors



RF Interface: BNC

RF Connector Style: Jack

RF Connector Mated Outer Diameter (Approximate): 14.53 mm [.572 in ]

Impedance:  $75 \Omega$ 

Compatible With RF Cable Type: Belden 8218

### Features

#### **Product Type Features**

RF Interface	BNC
RF Connector Style	Jack
Compatible With RF Cable Type	Belden 8218
Connector System	Cable-to-Cable
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	1
Number of Coaxial Contacts	1
Electrical Characteristics	
Impedance	75 Ω
Body Features	
Body Insulation	Without
Cable Connector Orientation	Straight
Body Material	Zinc

RF Connectors, BNC RF Interface, Jack, RF Connector Mated Outer Diameter (Approximate) .572 in [14.53 mm], 75  $\Omega$ 



Body Plating Material	Nickel
Contact Features	
RF Connector Center Contact Underplating Material	Nickel
	1080 µin
Crimp Type	Hex
RF Connector Center Contact Plating Material	Gold
RF Connector Center Contact Material	Beryllium Copper
Termination Features	
Termination Method to Wire & Cable	Hex Crimp
Mechanical Attachment	
RF Connector Coupling Mechanism	Bayonet
Connector Mounting Type	Cable Mount (Free-Hanging)
RF Contact Captivation Method	Mechanical
Detent	With
Dimensions	

14.53 mm[.572 in]

RF Connector Mated Outer Diameter (Approximate)

## Usage Conditions

Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
Operation/Application	
Operating Frequency	4 GHz
Packaging Features	
Packaging Method	Carton
Other	
Grade	Commercial
Coupling Nut Base Material	Brass
Dielectric Material	Polyethylene
Product Compliance For compliance documentation, visit the product page on TE.com>	
Product Compliance	Compliant with Exemptions
Product Compliance For compliance documentation, visit the product page on TE.com>	

**C** For support call+1 800 522 6752

RF Connectors, BNC RF Interface, Jack, RF Connector Mated Outer Diameter (Approximate) .572 in [14.53 mm], 75  $\Omega$ 



EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2021 (211) SVHC > Threshold: Pb (.6% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# Compatible Parts




RF Connectors, BNC RF Interface, Jack, RF Connector Mated Outer Diameter (Approximate) .572 in [14.53 mm], 75  $\Omega$ 



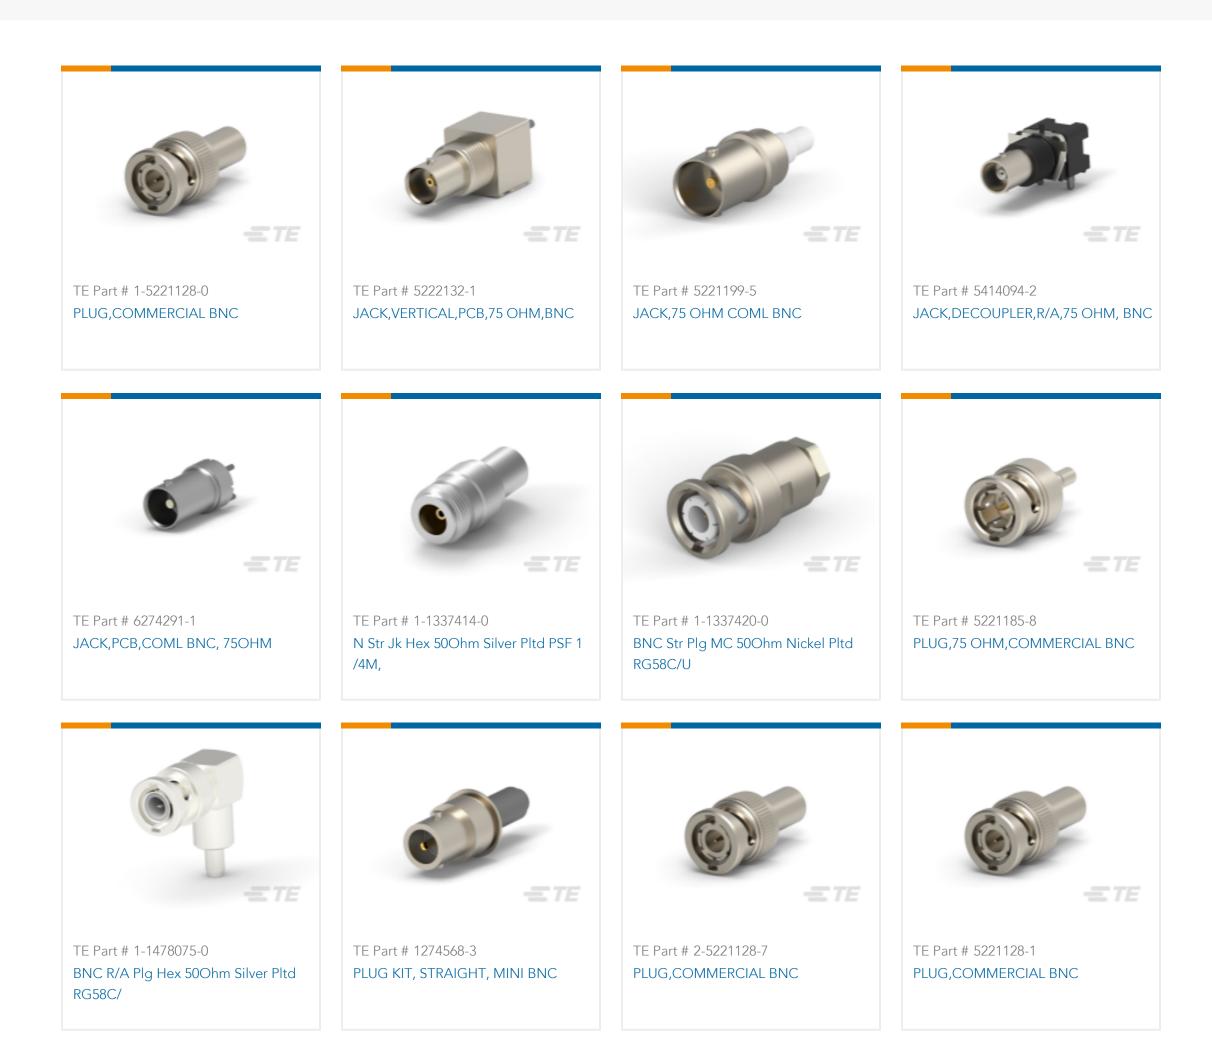

# Customers Also Bought

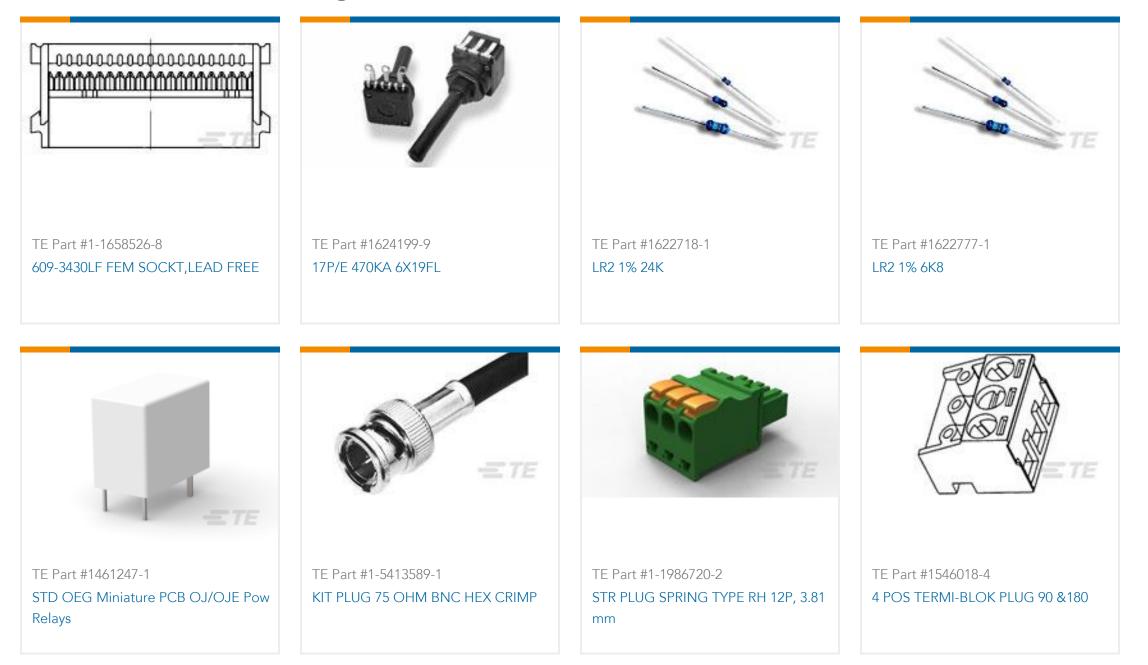

RF Connectors, BNC RF Interface, Jack, RF Connector Mated Outer Diameter (Approximate) .572 in [14.53 mm], 75  $\Omega$ 





### Documents

### Product Drawings JACK,75 OHM,COML BNC,HEX CRIMP

English

#### **CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_5413760-3\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_5413760-3\_A.3d\_igs.zip

English

Customer View Model

#### ENG\_CVM\_CVM\_5413760-3\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages BNC Connectors

English