# 1718490-1 - ACTIVE


### AMP | AMP MCP 1.5K, AMP MCP Connector System

TE Internal #: 1718490-1 Hybrid, Housing for Female Terminals, Wire-to-Wire, 9 Position, 4mm [.157in] Centerline, Black, Signal

#### View on TE.com >



Connectors > Automotive Connectors > Connector Housings > AMP MCP, UNSEALED CONNECTOR HOUSING

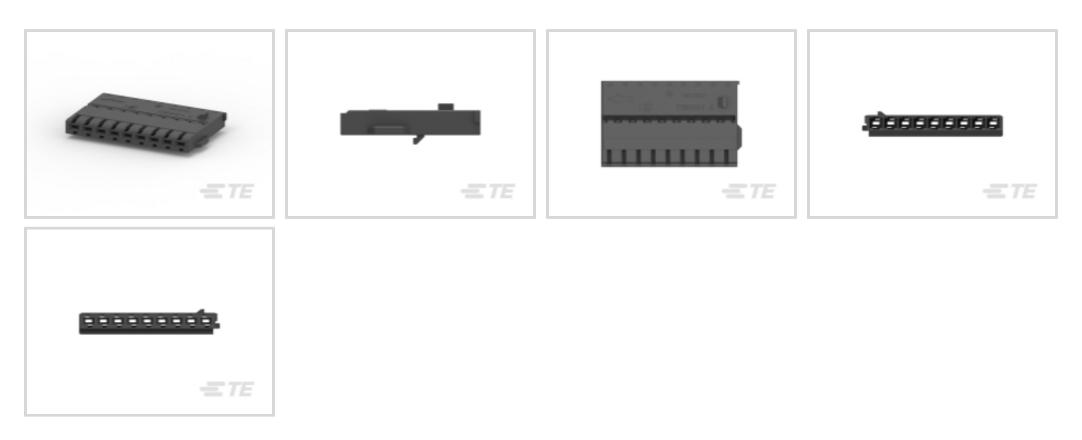

Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 1.6 mm [.063 in ]

Connector System: Wire-to-Wire

Number of Positions: 9

Centerline (Pitch): 4 mm [.157 in ]

### All AMP MCP, UNSEALED CONNECTOR HOUSING (179)

# Features

### Product Type Features

Connector & Housing Type	Housing for Female Terminals	
Connector System	Wire-to-Wire	
Sealable	No	
Hybrid Connector	No	
Primary Locking Feature	On the Terminal	
Configuration Features		
Number of Positions	9	
Number of Rows	1	
Electrical Characteristics		
Operating Voltage	36 VDC	
Nominal Voltage Architecture	12 V, 24 V	
Body Features		
Cable Exit Angle	Other	

**S** For support call+1 800 522 6752

Hybrid, Housing for Female Terminals, Wire-to-Wire, 9 Position, 4mm [.157in] Centerline, Black, Signal



Body Material	PBT GF	
Primary Product Color	Black	
Contact Features		
Mating Tab Width	1.6 mm[.063 in]	
Mechanical Attachment		
Mounting Feature	Without	
Terminal Position Assurance	Yes	
Strain Relief	No	
Housing Features		
Centerline (Pitch)	4 mm[.157 in]	
Dimensions		
Product Width	23.5 mm[.925 in]	
Product Length	37.2 mm[1.465 in]	
Product Height	4.2 mm[.165 in]	
Usage Conditions		
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C[158 °F][167 °F][176 ° F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F]	
Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]	
Operation/Application		
Circuit Application	Signal	
Industry Standards		
UL Flammability Rating	UL 94HB	
Packaging Features		
Packaging Quantity	1000	
Packaging Method	Box	
Other		
Serviceable	Yes	
Connector Position Assurance Capable	No	

# Product Compliance

For compliance documentation, visit the product page on TE.com>

Hybrid, Housing for Female Terminals, Wire-to-Wire, 9 Position, 4mm [.157in] Centerline, Black, Signal




EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Not applicable for solder process capability	

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

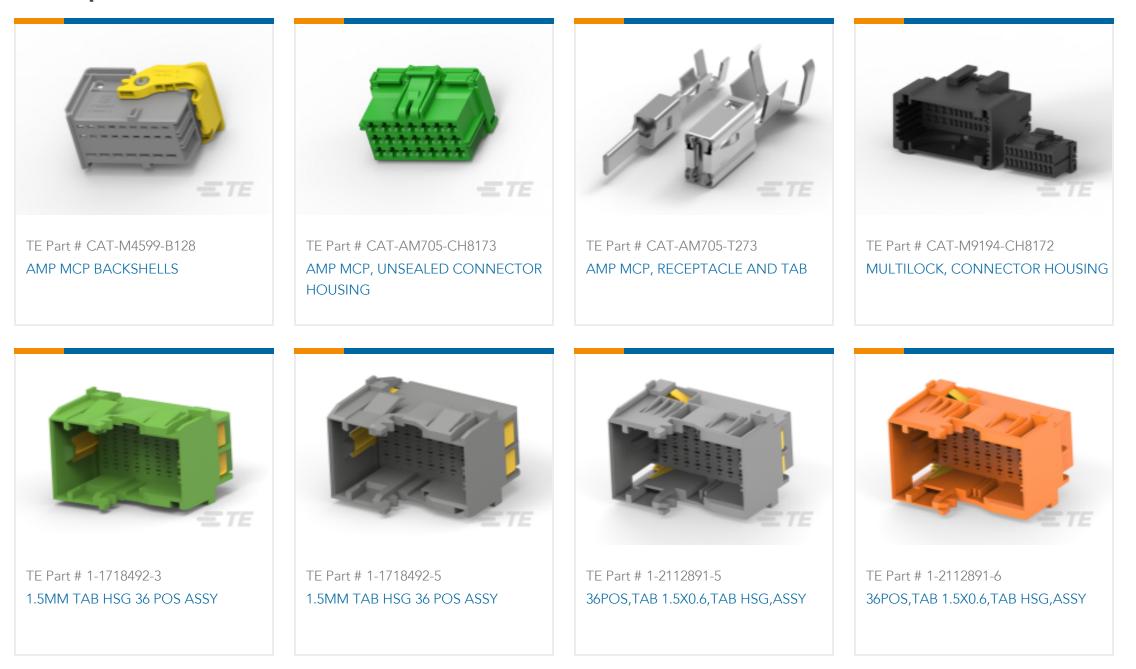


Hybrid, Housing for Female Terminals, Wire-to-Wire, 9 Position, 4mm [.157in] Centerline, Black, Signal





# Also in the Series | AMP MCP 1.5K

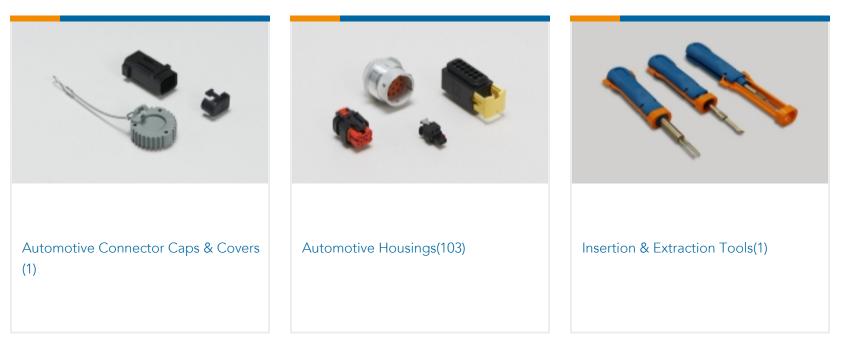

# Also in the Series AMP MCP Connector System



		-	
Automotive Connector Caps & Covers (24)	Automotive Connector Locks & Position Assurance(8)	Automotive Headers(29)	Automotive Housings(352)
	AND		
Automotive Seals & Cavity Plugs(6)	Automotive Terminals(124)	Insertion & Extraction Tools(13)	Other Automotive Connector Accessories(2)

Customers Also Bought

Hybrid, Housing for Female Terminals, Wire-to-Wire, 9 Position, 4mm [.157in] Centerline, Black, Signal





## Documents

### **Product Drawings** AMP MCP 1.5 RECEPT HSG 9 POS

English

### **CAD** Files

**Customer View Model** ENG\_CVM\_1718490-1\_A1.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_1718490-1\_A1.3d\_stp.zip

English

**Customer View Model** 

ENG\_CVM\_1718490-1\_A1.2d\_dxf.zip

English

#### 3D PDF

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

**Product Specifications Application Specification** 

German